

FED SUP CLASS
3030

REVIEW INTEREST: AR, MC
USER INTEREST:

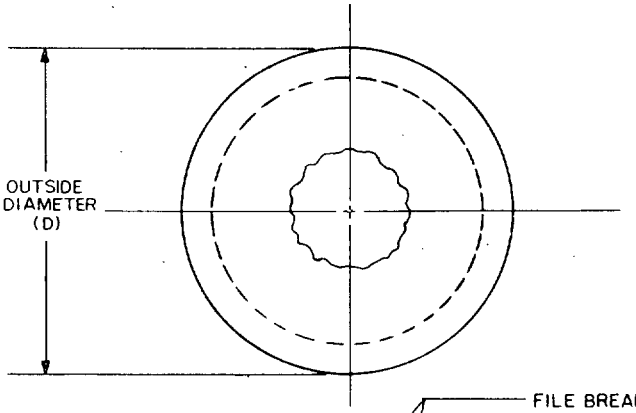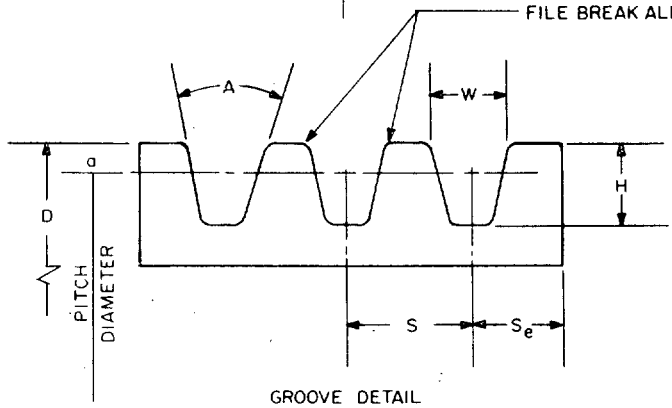


GROOVE DETAIL

SEE SHEET 5 FOR NOTES

ENTIRE STANDARD REVISED

APPROVED 20 MAY 1965 REVISED (A) 22 JUNE 1981

| | | | |
|---|---|---|---|
| P A<br>Other Cust ME<br>YD<br>99 | INTERNATIONAL INTEREST | TITLE<br>PULLEY, INDUSTRIAL<br>(MULTIPLE DRIVE)<br>STANDARD DEEP AND NARROW GROOVE | MILITARY STANDARD<br>MS39260 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | | SHEET 1 OF 5 |

DD FORM 672-1

3030-0151

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

GROOVE DIMENSIONS - INCHES

Standard groove dimensions

| Cross section | D Outside diameter range | A Groove angle ±0.33° | W | H min. | S ±0.025 | Se | Za |
|---|---|---|---|---|---|---|---|
| A | Up through 5.65 | 34 | 0.494 ±0.005 | 0.460 | 0.625 | 0.375 +0.090 -0.062 | 0.250 |
| | Over 5.65 | 38 | 0.504 | | | | |
| B | Up through 7.35 | 34 | 0.637 ±0.006 | 0.550 | 0.750 | 0.500 +0.120 -0.065 | 0.350 |
| | Over 7.35 | 38 | 0.650 | | | | |
| A/B | Up through 7.35 | 34 | 0.612 ±0.006 | 0.612 | 0.750 | 0.500 +0.120 -0.065 | A-0.620 B-0.280 |
| | Over 7.35 | 38 | 0.625 | | | | |
| C | Up through 8.39 | 34 | 0.879 | 0.750 | 1.000 | 0.688 +0.160 -0.070 | 0.400 |
| | Over 8.39 to & incl. 12.40 | 36 | 0.887 ±0.007 | | | | |
| | Over 12.40 | 38 | 0.895 | | | | |
| D | Up through 13.59 | 34 | 1.259 | 1.020 | 1.438 | 0.875 +0.220 -0.080 | 0.600 |
| | Over 13.59 to & incl. 17.60 | 36 | 1.271 ±0.008 | | | | |
| | Over 17.60 | 38 | 1.283 | | | | |
| E | Up through 24.80 | 36 | 1.527 ±0.010 | 1.270 | 1.750 | 1.125 +0.280 -0.090 | 0.800 |
| | Over 24.80 | 38 | 1.542 | | | | |

Deep groove dimensions

| Cross Section | D Outside diameter range | A Groove angle ±0.33° | W | H min. | S ±0.025 | Se | Za |
|---|---|---|---|---|---|---|---|
| A | Up through 5.96 | 34 | 0.589 ±0.005 | 0.615 | 0.750 | 0.438 +0.090 -0.062 | 0.560 |
| | Over 5.96 | 38 | 0.611 | | | | |
| B | Up through 7.71 | 34 | 0.747 ±0.006 | 0.730 | 0.875 | 0.562 +0.120 -0.065 | 0.710 |
| | Over 7.71 | 38 | 0.774 | | | | |
| C | Up through 9.00 | 34 | 1.066 | 1.055 | 1.250 | 0.812 +0.160 -0.070 | 1.010 |
| | Over 9.00 to & incl. 13.01 | 36 | 1.085 ±0.007 | | | | |
| | Over 13.01 | 38 | 1.105 | | | | |
| D | Up through 14.42 | 34 | 1.513 | 1.435 | 1.750 | 1.062 +0.220 -0.080 | 1.410 |
| | Over 14.42 to & incl. 18.43 | 36 | 1.541 ±0.008 | | | | |
| | Over 18.43 | 38 | 1.569 | | | | |
| E | Up through 25.69 | 36 | 1.816 ±0.010 | 1.715 | 2.062 | 1.438 +0.280 -0.090 | 1.690 |
| | Over 25.69 | 38 | 1.849 | | | | |

APPROVED 20 MAY 1965 REVISED (A) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

| P. A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cust ME YD 99 | | PULLEY, INDUSTRIAL (MULTIPLE DRIVE) STANDARD DEEP AND NARROW GROOVE | MS39260 |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | | SHEET 2 OF 5 |

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

OTHER PULLEY TOLERANCES

| OUTSIDE DIAMETER | RADIAL RUNOUT** | AXIAL RUNOUT** |
|---|---|---|
| Up thru 4.0 inches<br>Outside Diameter ±0.020 inches | Up thru 10.0 inches<br>Outside Diameter 0.010 inches | Up thru 5.0 inches<br>Outside Diameter 0.005 inches |
| For each additional inch of outside diameter add ±0.005 inches | For each additional inch of outside diameter add 0.0005 inches | For each additional inch of outside diameter add 0.001 inches |

** Total Indicator Reading

Summation of the deviations from "S" for all grooves in any one pulley shall not exceed ±0.050 inches.

GROOVE DIMENSIONS—INCHES (CONTINUED)
NARROW GROOVE DIMENSIONS

STANDARD GROOVE DIMENSIONS

| Cross section | Minimum Recommended | D Outside diameter range | A Groove angle ±0.25° | W ±0.005 | H min. | S ±0.015 | Se | 2a |
|---|---|---|---|---|---|---|---|---|
| 3V | 2.65 | Up through 3.49<br>Over 3.49 to & incl. 6.00<br>Over 6.00 to & incl. 12.00<br>Over 12.00 | 36<br>38<br>40<br>42 | 0.350 | 0.340 | 0.406 | 0.344 +0.094 -0.031 | 0.050 |
| 5V | 7.10 | Up through 9.99<br>Over 9.99 to & incl. 16.00<br>Over 16.00 | 38<br>40<br>42 | 0.600 | 0.590 | 0.688 | 0.500 +0.125 -0.047 | 0.100 |
| 8V | 12.50 | Up through 15.99<br>Over 15.99 to & incl 22.40<br>Over 22.40 | 38<br>40<br>42 | 1.000 | 0.990 | 1.125 | 0.750 +0.250 -0.062 | 0.200 |

DEEP GROOVE DIMENSIONS

| Cross section | Minimum Recommended | D Outside diameter range | A Groove angle ±0.25° | W ±0.005 | H min. | S ±0.015 | Se | 2a |
|---|---|---|---|---|---|---|---|---|
| 3V | 2.87 | Up through 3.71<br>Over 3.71 to & incl. 6.22<br>Over 6.22 to & incl 12.22<br>Over 12.22 | 36<br>38<br>40<br>42 | 0.421<br>0.425<br>0.429<br>0.434 | 0.449 | 0.500 | 0.375 +0.094 -0.031 | 0.268 |
| 5V | 7.42 | Up through 10.31<br>Over 10.31 to & incl. 16.32<br>Over 16.32 | 38<br>40<br>42 | 0.710<br>0.716<br>0.723 | 0.750 | 0.812 | 0.562 +0.125 -0.047 | 0.420 |
| 8V | 13.02 | Up through 16.51<br>Over 16.51 to & incl. 22.92<br>Over 22.92 | 38<br>40<br>42 | 1.180<br>1.190<br>1.201 | 1.252 | 1.312 | 0.844 +0.250 -0.062 | 0.724 |

OTHER PULLEY TOLERANCES

| OUTSIDE DIAMETER | RADIAL RUNOUT* | AXIAL RUNOUT* |
|---|---|---|
| Up through 3.0 inches outside diameter.....±0.020 inches | Up through 10.0 inches outside diameter.....0.010 inches | Up through 5.0 inches outside diameter.....0.005 inches |
| For each additional inch of outside diameter add.....±0.0029 inches | For each additional inch of outside diameter add.....0.0005 inches | For each additional inch of outside diameter add.....0.001 inches |

* Total indicator reading

Summation of the deviation from "S" for all grooves in any one pulley shall not exceed ±0.031 inch.

APPROVED 20 MAY 1965 REVISED (A) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

| P. A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cost ME YD 99 | | PULLEY, INDUSTRIAL (MULTIPLE DRIVE) STANDARD DEEP AND NARROW GROOVE | MS 39260 |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | | SHEET 3 OF 5 |

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
3030

GROOVE DIMENSIONS - MILLIMETERS

| Standard groove dimensions | | | | | | | | Deep groove dimensions | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Cross section | D Outside diameter range | A Groove angle ±0.33° | W | H min. | S ±0.6 | Se | 2a | D Outside diameter range | A Groove angle ±0.33° | W | H min. | S ±0.6 | Se | 2a |
| 13C | Up through 140<br>Over 140 | 34<br>38 | 13<br>±0.13 | 12 | 15 | +2<br>10<br>-1 | 8.0 | Up through 148<br>Over 148 | 34<br>38 | 13.46<br>13.76<br>±0.13 | 16 | 17.5 | +2<br>13<br>-1 | 11.0 |
| 16C | Up through 180<br>Over 180 | 34<br>38 | 16<br>±0.15 | 14 | 19 | +3<br>12.5<br>-1 | 4.0 | Up through 190<br>Over 190 | 34<br>38 | 17.06<br>17.44<br>±0.15 | 19 | 22.0 | +3<br>14<br>-4 | 11.0 |
| 13C/16C | Up through 180<br>Over 180 | 34<br>38 | 16<br>±0.15 | 17 | 19 | +3<br>12.5<br>-1 | 13/<br>4 0 | Not applicable | | | | | | |
| 22C | Up through 200<br>Over 200 to & incl. 315<br>Over 315 | 34<br>36<br>38 | 22<br>±0.18 | 19 | 25.5 | +4<br>18<br>-2 | 6.0 | Up through 214<br>Over 214 to & incl. 309<br>Over 309 | 34<br>36<br>38 | 26.92<br>26.26<br>26.56<br>±0.18 | 26 | 30 | +4<br>20<br>-2 | 20.0 |
| 32C | Up through 355<br>Over 355 to & incl. 450<br>Over 450 | 34<br>36<br>38 | 32<br>±0.20 | 26 | 36.5 | +6<br>26<br>-3 | 9.0 | Up through 373<br>Over 373 to & incl. 468<br>Over 468 | 34<br>36<br>38 | 37.34<br>37.68<br>38.28<br>±0.23 | 35 | 43 | +6<br>29<br>-3 | 27.0 |

OTHER PULLEY TOLERANCES

OUTSIDE DIAMETER
Up through 150 mm outside diameter.....±0.5 mm

For each additional 25 mm of outside diameter add...±0.12 mm

RADIAL RUNOUT*
Up through 250 mm outside diameter.....0.25 mm

For each additional 25 mm of outside diameter add...0.01 mm

AXIAL RUNOUT*
Up through 125 mm outside diameter.....0.13 mm

For each additional 25 mm outside diameter add...0.03 mm

* Total Indicator Reading

Summation of the deviations "S" for all grooves in any one pulley shall not exceed 1.. mm.

NARROW GROOVE DIMENSIONS

| Standard Groove Outside Diameter | | | | Standard Groove Dimensions | | | | | Deep Groove Outside Diameter | | Deep Groove Dimensions | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Cross section | Minimum recommended | D Range | A Groove angle ±0.25° | W ±0.13 | H min. | S ±0.4 | Se | 2a | Minimum recommended | D Range | W ±0.13 | H min. | S ±0.4 | Se | 2a |
| 9N | 67 | Up through 90<br>Over 90 to & incl. 150<br>Over 150 to & incl 305<br>Over 305 | 36<br>38<br>40<br>42 | 9.09 | 8.6 | 10.3 | +2<br>9<br>-1 | 5.3 | 73 | Up through 96<br>Over 96 to & incl. 156<br>Over 156 to & incl. 311<br>Over 311 | 10.69<br>10.90<br>10.90<br>11.05 | 11.4 | 12.7 | +2<br>10<br>-1 | 6.8 |
| 15N | 180 | Up through 255<br>Over 255 to & incl. 405<br>Over 405 | 38<br>40<br>42 | 15.24 | 15.0 | 17.5 | +3<br>13<br>-1 | 7.6 | 186 | Up through 263<br>Over 263 to & incl. 418<br>Over 418 | 18.03<br>18.19<br>18.36 | 19.0 | 20.6 | +3<br>14<br>-1 | 10.9 |
| 25N | 315 | Up through 405<br>Over 405 to & incl. 570<br>Over 570 | 40<br>42 | 25.40 | 25.1 | 28.6 | +6<br>19<br>-2 | 9.0 | 328 | Up through 413<br>Over 413 to & incl. 584<br>Over 584 | 29.97<br>30.13<br>30.51 | 31.8 | 33.3 | +6<br>21<br>-2 | 18.4 |

A FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5.
APPROVED 20 MAY 1965 REVISED

| P A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cust ME YD 99 | | PULLEY, INDUSTRIAL (MULTIPLE DRIVE) STANDARD DEEP AND NARROW GROOVE | MS 39260 |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | | SHEET 4 OF 5 |

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
30.30

OTHER PULLEY TOLERANCES

| OUTSIDE DIAMETER | RADIAL RUNOUT* | AXIAL RUNOUT* |
|---|---|---|
| Up through 200 mm outside diameter.....±0.5mm | Up through 250 mm outside diameter.....0.25mm | Up through 125 mm outside diameter.....0.13mm |
| For each additional 25 mm of outisde diameter add.....±0.05mm | For each additional 25 mm of outside diameter add.....0.01mm | For each additional 25 mm of outside diameter add.....0.03mm |

* Total Indicator Reading

Summation of the deviations from "S" for all grooves in any one pulley shall not exceed ±0.8mm.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).
2. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS.
3. FINISH: THE SIDES OF THE GROOVES SHALL HAVE A SURFACE FINISH VALUE OF 125 MICROINCHES OR SMOOTHER.
4. WHEN SPECIFIED PULLEYS SHALL BE BALANCED DYNAMICALLY WHEN VIBRATION OR SPEED OVER 5000 FT/MIN. IS ANTICIPATED.
5. THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

APPROVED 20 MAY 1965 REVISED (A) FOR CHANGES SEE SHEETS 1,2,3,4 AND 5

| P. A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cust ME YD 99 | | PULLEY, INDUSTRIAL (MULTIPLE DRIVE) STANDARD DEEP AND NARROW GROOVE | MS39260 |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | | SHEET 5 OF 5 |

DD FORM 1 MAY 71 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.