INCH-POUND

MS51972B
w/AMENDMENT 1
27 OCT 2025
SUPERSEDING
MS51972B
06 DEC 2022


DETAIL SPECIFICATION SHEET

NUT, PLAIN, HEXAGON-STEEL, CORROSION RESISTING, 300 SERIES, PASSIVATED, UNF-2B

Reactivated after 6 December 2022 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The Requirements for acquiring the product described herein shall
consist of this specification sheet and FF-N-836.

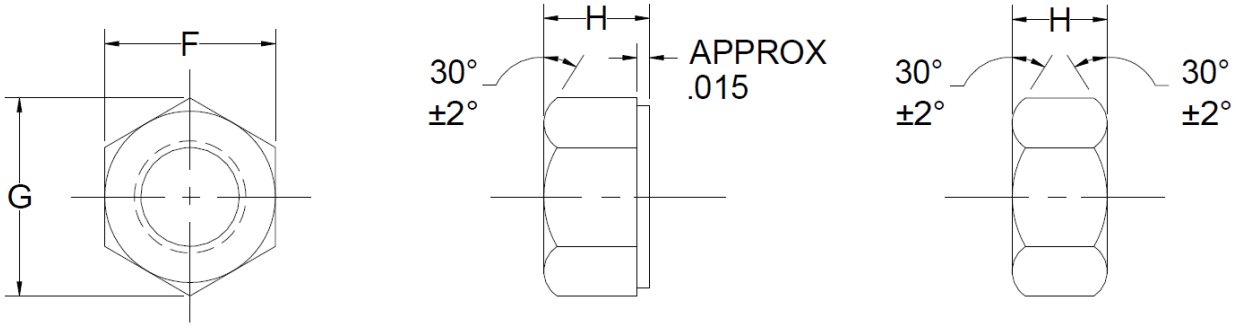

ACCEPTABLE DESIGNS

Figure 1. NUT, PLAIN, HEXAGON

Comments, suggestions, or questions on this document should be addressed to DLA Aviation VEB, 6090 Strathmore Road, Richmond, VA 23297-5616 or emailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

Table I. Dash Numbers and Dimensions

NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD			1/4 .2500	5/16 .3125	3/8 .3725	7/16 .4375	1/2 .5000	9/16 .5625	5/8 .6250
THREADS PER INCH			28	24	24	20	20	18	18
F	WIDTH ACROSS FLATS	NOM MAX MIN	7/16 .4375 .4280	1/2 .5000 .4890	9/16 .5625 .5510	11/16 .6875 .6750	3/4 .7500 .7360	7/8 .8750 .8610	15/16 .9375 .9220
G	WIDTH ACROSS CORNERS	MAX MIN	.505 .488	.577 .557	.650 .628	.794 .768	.866 .840	1.010 .982	1.083 1.051
H	THICKNESS	NOM MAX MIN	7/32 .226 .212	17/64 .273 .258	21/64 .337 .320	3/8 .385 .365	7/16 .448 .427	31/64 .496 .473	35/64 .559 .535
MATERIAL			DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
STEEL, CORROSION RESISTING			1	2	3	4	5	6	7
NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD			3/4 .7500	7/8 .8750	1 1.0000	1-1/8 1.1250	1-1/4 1.2500	1-3/8 1.3750	1-1/2 1.5000
THREADS PER INCH			16	14	12	12	12	12	12
F	WIDTH ACROSS FLATS	NOM MAX MIN	1-1/8 1.1250 1.0880	1-5/16 1.3125 1.2690	1-1/2 1.5000 1.4500	1-11/16 1.6875 1.6310	1-7/8 1.8750 1.8120	1-2/16 2.0625 1.9940	2-1/4 2.2500 2.1750
G	WIDTH ACROSS CORNERS	MAX MIN	1.299 1.240	1.516 1.447	1.732 1.653	1.949 1.859	2.165 2.066	2.382 2.273	2.598 2.480
H	THICKNESS	NOM MAX MIN	41/64 .665 .617	3/4 .776 .724	55/64 .887 .831	31/32 .999 .939	1-1/16 1.094 1.030	1-11/64 1.206 1.138	1-9/32 1.317 1.245
MATERIAL			DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
STEEL CORROSION RESISTING			8	9	10	11	12	13	14

Requirements.

1. Material. Steel, corrosion resisting, 300 series in accordance with FF-N-836.

2. Protective coating. Passivate in accordance with SAE-AMS2700, Method 1 Type 6, 7, or 8, Class 4 or Method 2. Passivation treatments containing hexavalent chromium shall be prohibited.

3. Magnetic permeability. These fasteners have a magnetic permeability of 2.0 maximum (air=1.0) for a field strength of H=200 Oersteds using a magnetic indicator in accordance with ASTM A342/A342M, test method 1.

4. Threads. Threads shall be in accordance with FED-STD-H28/2 or ASME B1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

5. Part number. The MS part number consists of the MS number plus the dash number. Example: MS51972 – 1

Notes.

1. Unless otherwise specified, all dimensions are in inches.

2. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

3. Referenced government (or non-government) documents of the issue listed in that issue of the department of defense index of specifications and standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

4. Do not use unassigned part numbers.

5. Changes from previous issue. Entire specification revised.

INTERCHANGEABILITY TABLE

The following nuts covered by dash numbers given in MS35690 are cancelled after the date indicated on the cancellation document. Use the dash numbers given in the preceding sheet. The cancelled nuts cannot always replace the new nuts and should be used until existing stocks are depleted. Use only the new nuts for design and replacement. Replacement shall be in accordance with Table II. Interchangeability information regarding part numbers on the superseding drawing is also contained in this table.

Table II.

CANCELED MS35690 DASH NO.	SUPERSEDING MS51972 DASH NO.		CANCELED MS35690 DASH NO.	SUPERSEDING MS51972 DASH NO.		CANCELED MS35690 DASH NO.	SUPERSEDING MS51972 DASH NO.
430	1		930	6		1830	11
530	2		1030	7		2030	12
630	3		1230	8		2230	13
730	4		1430	9		2430	14
830	5		1630	10			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AR
DLA – GS

Preparing Activity:
DLA – GS7

(Project 5310-2025-023)

Review Interests:
Army – AT, AV, MI
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.