


FED. SUP CLASS
4730

MS9098

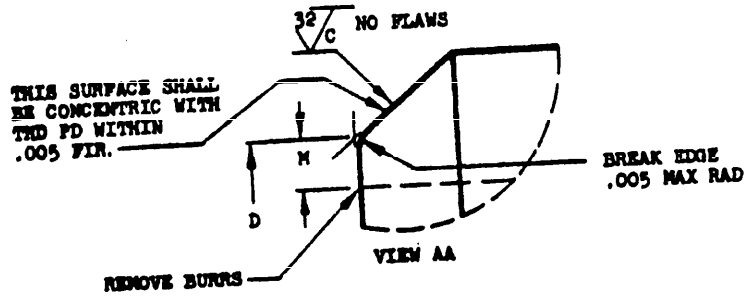

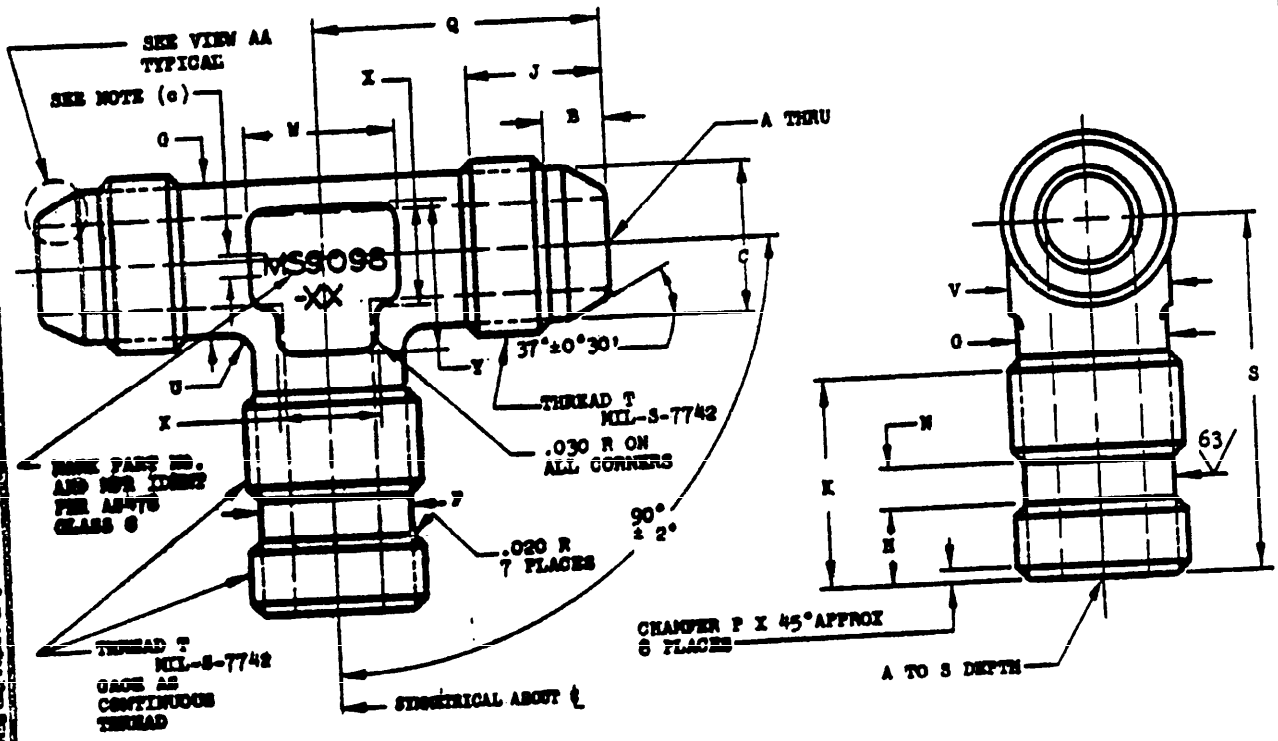

(B) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972.
NO SUPERSEDING STANDARD.



SECTION THRU THD PROFILE

APPROVED 11 Apr 60 REVISED (A) 11 May 62 (B) 26 Oct 72

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

CUSTODIANS USAF - 11 Navy - AS PROCUREMENT SPECIFICATION NONE	MILITARY STANDARD TEE, TUBE - AMS 4135, 2088	MS9098 SHEET 1 OF 2

E-25-70-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.

MS9098

PART NO.	(f) E	NOM TUBE OD	THREAD T	A DIA	B +.015 -.000	C DIA +.000 -.010	D DIA ±.003	F DIA +.002 -.003 (a) (b)	G DIA	K ±.010	J ±.010	K ±.010
MS9098-08	.100	.500	.750-16UNF-3A	.387- .395	.289	.660	.462	.660	.650	.312	.489	.903
MS9098-09	.100	.562	.8125-16UN-3A	.434- .442	.229	.722	.509	.722	.710	.312	.489	.903
MS9098-10	.100	.625	..875-14UNF-3A	.480- .488	.255	.773	.555	.773	.765	.357	.585	1.018
MS 098-11	.130	.688	1.000-12UNF-3A	.542- .552	.304	.882	.619	.882	.870	.417	.663	1.122
MS 098-12	.130	.750	1.0625-12UN-3A	.604- .614	.304	.945	.681	.945	.935	.417	.663	1.122
MS 98-14	.130	.875	1.1875-12UN-3A	.729- .739	.304	1.070	.806	1.070	1.055	.417	.710	1.122
MS9098-16	.130	1.000	1.3125-12UN-3A	.839- .851	.312	1.195	.918	1.195	1.185	.417	.720	1.122
MS9098-18	.175	1.125	1.500-12UNF-3A	.948- .960	.312	1.382	1.027	1.382	1.360	.417	.767	1.122
MS9098-20	.175	1.250	1.625-12UN-3A	1.073-1.086	.363	1.507	1.153	1.507	1.495	.417	.767	1.122
MS9098-24	.185	1.500	1.875-12UN-3A	1.307-1.320	.374	1.756	1.387	1.756	1.745	.417	.889	1.122
MS9098-28	.255	1.750	2.250-12UN-3A	1.542-1.557	.447	2.131	1.652	2.131	2.120	.417	1.017	1.205
MS9098-32	.255	2.000	2.500-12UN-3A	1.776-1.791	.457	2.381	1.886	2.381	2.370	.417	1.142	1.320

PART NO.	M MIN	N +.010 -.000	P	Q ±.010	S ±.010	U RADIUS	V	W	X	Y	APPROX WEIGHT LBS/EA
MS9098-08	.030	.187	.040-.070	1.195	1.460	.094	.688	.850	.430	.640	.064
MS9098-09	.030	.203	.040-.070	1.195	1.498	.094	.750	.880	.440	.660	.097
MS9098-10	.030	.219	.050-.080	1.411	1.680	.125	.812	1.000	.500	.750	.128
MS9098-11	.030	.234	.050-.080	1.614	1.855	.125	.938	1.000	.500	.750	.187
MS9098-12	.030	.234	.050-.080	1.614	1.855	.125	1.000	1.000	.500	.750	.201
MS9098-14	.030	.234	.050-.080	1.768	1.945	.125	1.125	1.000	.500	.750	.245
MS9098-16	.030	.234	.050-.080	1.778	2.010	.125	1.250	1.000	.500	.750	.282
MS9098-18	.030	.234	.050-.080	2.027	2.100	.125	1.438	1.200	.600	.900	.428
MS9098-20	.030	.234	.050-.080	2.027	2.165	.125	1.625	1.200	.600	.900	.477
MS9098-24	.030	.234	.050-.080	2.293	2.290	.125	1.812	1.200	.600	.980	.631
MS9098-28	.044	.234	.050-.080	2.777	2.625	.188	2.188	1.320	.660	.990	1.151
MS9098-32	.044	.234	.050-.080	3.027	2.975	.250	2.438	1.500	.750	1.125	1.475

(a) DIAMETER F SHALL BE FREE OF THREAD MARKS.
(b) DIAMETER F SHALL BE CONCENTRIC WITH PD OF THREAD WITHIN .0025 FIR.
(c) .040-.060 FOR -8 THRU -16 SIZES; .090-.150 FOR -18 AND LARGER SIZES.
(d) ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .010 FIR. UNLESS OTHERWISE SPECIFIED.
(e) PARTING LINE MISMATCH .015 MAX.
(f) E MIN WALL THICKNESS BETWEEN FORGED SURFACE AND HOLE A:

MATERIAL: ALUMINUM AMS 4135.
FINISH: ANODIC TREATMENT AMS 2470.
SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 MICROINCHES.
PARTS SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.015.
[illegible]. DIMENSIONS ARE TO SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
DO NOT USE UNASSIGNED PART NUMBERS:
AS, & AMS ARE SAE PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS SUBCOMMITTEE OF THE SAE.

CUSTODIAN
USAF - 11
Navy - AS

PROCUREMENT SPECIFICATION
NONE

MILITARY STANDARD

TEE, TUBE - AMS 4135, BOSS

MS9098

SHEET 1 OF 3

DD FORM 1 NOV 68 1233 E-25-70-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.