FED. SUP CLASS
5306

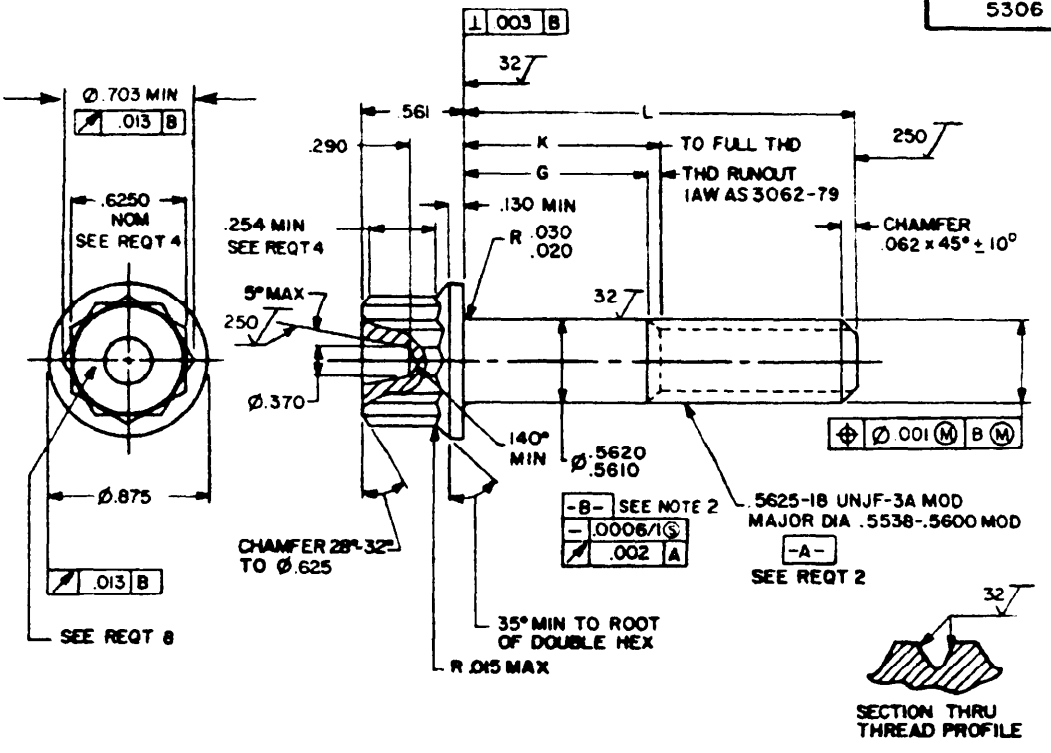


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L INCH	G MIN INCH	K MAX INCH	APPROX MASS LB/100	DASH NUMBER	L INCH	G MIN INCH	K MAX INCH	APPROX MASS LB/100
-03	1.066	.077	.198	12.79	-31	2.816	1.827	1.948	25.62
-04	1.128	.139	.260	13.25	-32	2.878	1.889	2.010	26.07
-05	1.190	.201	.322	13.70	-33	2.940	1.951	2.072	26.52
-06	1.253	.264	.385	14.16	-34	3.003	2.014	2.135	26.99
-07	1.316	.327	.448	14.62	-35	3.066	2.077	2.198	27.45
-08	1.378	.389	.510	15.08	-36	3.128	2.139	2.260	27.90
-09	1.440	.451	.572	15.53	-37	3.190	2.201	2.322	28.36
-10	1.503	.514	.635	15.99	-38	3.253	2.264	2.385	28.82
-11	1.566	.577	.698	16.45	-39	3.316	2.327	2.448	29.28
-12	1.628	.639	.760	16.91	-40	3.378	2.389	2.510	29.74
-13	1.690	.701	.822	17.36	-41	3.440	2.451	2.572	30.19
-14	1.753	.764	.885	17.82	-42	3.503	2.514	2.635	30.65
-15	1.816	.827	.948	18.29	-43	3.566	2.577	2.698	31.11
-16	1.878	.889	1.010	18.74	-44	3.628	2.639	2.760	31.57
-17	1.940	.951	1.072	19.20	-45	3.690	2.701	2.822	32.02
-18	2.003	1.014	1.135	19.66	-46	3.753	2.764	2.885	32.48
-19	2.066	1.077	1.198	20.12	-47	3.816	2.827	2.948	32.94
-20	2.128	1.139	1.260	20.57	-48	3.878	2.889	3.010	33.40
-21	2.190	1.201	1.322	21.03	-49	3.940	2.951	3.072	33.85
-22	2.253	1.264	1.385	21.49	-50	4.003	3.014	3.135	34.32
-23	2.316	1.327	1.448	21.95	-51	4.066	3.077	3.198	34.78
-24	2.378	1.389	1.510	22.41	-52	4.128	3.139	3.260	35.23
-25	2.440	1.451	1.572	22.86	-53	4.190	3.201	3.322	35.68
-26	2.503	1.514	1.635	23.32	-54	4.253	3.264	3.385	36.15
-27	2.566	1.577	1.698	23.78	-55	4.316	3.327	3.448	36.61
-28	2.628	1.639	1.760	24.24	-56	4.378	3.389	3.510	37.06
-29	2.690	1.701	1.822	24.69	-57	4.440	3.451	3.572	37.52
-30	2.753	1.764	1.885	25.15	-58	4.503	3.514	3.635	37.98

© ENTIRE STANDARD REVISED

APPROVED 27 JUN 74 REVISED © 24 FEB 96

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY-AS Other Cust ARMY - AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE- DOUBLE HEXAGON, EXTENDED WASHER HEAD, CLOSE TOLERANCE SHANK, CORROSION AND HEAT RESISTANT STEEL, .5625-18 UNJF-3A	MILITARY STANDARD MS9729
PROCUREMENT SPECIFICATION AMS 7471	SUPERSEDES:		PAGE 1 OF 2

AMSC N/A DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0959
E25-187-4

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:23Z
Check the source to verify that this is the current version before use.


TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	L INCH	G MIN INCH	K MAX INCH	APPROX MASS LB/100	DASH NUMBER	L INCH	G MIN INCH	K MAX INCH	APPROX MASS LB/100
-59	4.566	3.577	3.698	38.44	-67	5.066	4.077	4.198	42.11
-60	4.628	3.639	3.760	38.90	-68	5.128	4.139	4.260	42.56
-61	4.690	3.701	3.822	39.35	-69	5.190	4.201	4.322	43.01
-62	4.753	3.764	3.885	39.81	-70	5.253	4.264	4.385	43.48
-63	4.816	3.827	3.948	40.27	-71	5.316	4.327	4.448	43.94
-64	4.878	3.889	4.010	40.73	-72	5.378	4.389	4.510	44.39
-65	4.940	3.951	4.072	41.18	-73	5.440	4.451	4.572	44.85
-66	5.003	4.014	4.135	41.64	-74	5.503	4.514	4.635	45.31

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5708.
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
4. WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS 870.
5. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD IN ACCORDANCE WITH ANSI B46.1.
6. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645-83.
7. HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT THAT DISTORTIONS AT A IN FIGURE 2 OF THE PROCUREMENT SPECIFICATION SHALL NOT BE PERMITTED ON THE HEAD BEARING AREA AND SHALL BE PERMITTED ON THE SHANK DIAMETER ONLY IF THE DISTORTION DOES NOT CAUSE THE SHANK DIAMETER TO EXCEED .5625 DIAMETER EXCEPT DASH NUMBER SIZES -14 AND SMALLER.
8. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478-79, CLASS A.
9. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS $\pm$.010, ANGULAR DIMENSIONS $\pm 5^{\circ}$.
10. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9729-03



MS9729-03 INDICATES: BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, CLOSE TOLERANCE SHANK, .5625-18 UNJF-3A, LENGTH 1.066

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. FOR PART NUMBERS -03 THRU -14 THE THREAD PD SHALL REPLACE DATUM B.
3. DO NOT USE UNASSIGNED PART NUMBERS.
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
5. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
6. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
7. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 27 JUN 74 REVISED © FOR CHANGES SEE PAGES 1 AND 2

P. A. NAV Y-AS
Other Cust
ARMY-AV
AIR FORCE-99

INTERNATIONAL INTEREST

PROCUREMENT SPECIFICATION
AMS 7471

SUPERSEDES:

TITLE BOLT, MACHINE- DOUBLE HEXAGON, EXTENDED WASHER HEAD, CLOSE TOLERANCE SHANK, CORROSION AND HEAT RESISTANT STEEL, .5625-18 UNJF-3A

MILITARY STANDARD

MS9729

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0959
E25-187-4

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:23Z
Check the source to verify that this is the current version before use.