INCH-POUND

MIL-PRF-12883/2D
28 June 1996
SUPERSEDING
MIL-S-12883/2C
3 February 1978


PERFORMANCE SPECIFICATION SHEET

SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS (ELECTRON TUBE, TOP MOUNTING, SADDLE TYPE WITH SHIELD BASE, 7 CONTACT, RADIAL)

Inactive for new design after 3 February 1978. For new design use MIL-PRF-12883/10

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-12883.

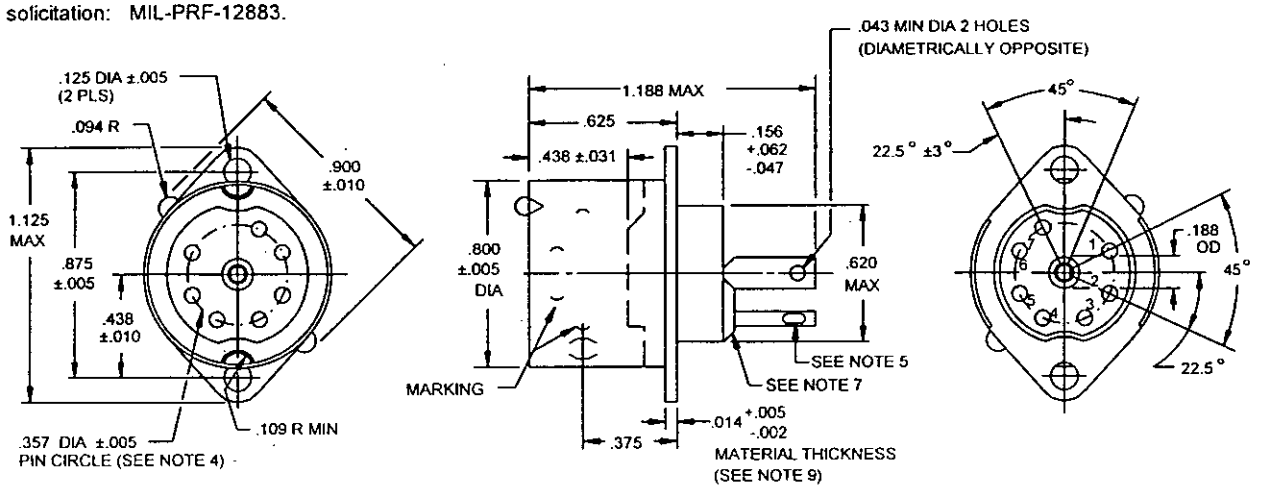

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 inch (0.41 mm) and ±1/2° on angles.
4. Seven contact cavities equally spaced through 270°of arc, and each cavity located within 1/2° of true position shall be established along the pin circle.
5. Each contact tab shall have either 2 wire holes of .040 inch (1.02 mm) minimum width and .075 inch (1.90 mm) minimum length, or 1 hole of .040 inch (1.02 mm) minimum width and .125 inch (3.18 mm) minimum length. The hole, or holes, shall lie on the longitudinal centerline of the contact tab within ±.008 inch (0.20 mm).
6. An orientation slot or tongue, or other suitable means to serve as a guide for proper positioning of an applicable electron tube in the socket contacts, shall be placed on the shield mounting between contacts 1 and 7.
7. The design of bosses and the shape of barriers, when used, are optional. When present, barriers shall have a maximum height of .062 inch (1.57 mm).
8. Clearance between the cavity wall and the contact, with the contact in any position, shall be no greater than .018 inch (0.46 mm).
9. Material thickness of mounting flange shall be measured in an area where burring or dishing of the mounting hole is not present.

FIGURE 1. Socket configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:29Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.043	1.09	.125	3.18	.620	15.75	1.125	28.58
.005	0.13	.047	1.19	.156	3.96	.625	15.88	1.188	30.18
.010	0.25	.062	1.57	.188	4.78	.800	20.32		
.014	0.36	.094	2.39	.375	9.52	.875	22.22		
.031	0.79	.109	2.77	.438	11.13	.900	22.86		

FIGURE 1. Socket configuration - continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1, and table I.

Reference material: (see 3.1.1 of MIL-PRF-12883).

Insulating material: Ceramic, SDG-F, GDI-30F, or MIL-M-14 type MFE, see table I.

Contact cavities: One shape only; D-shaped or circular, at option of the manufacturer.

Electrical

Insulation resistance: 1,000 megohms minimum. Test pin diameter: .040 ±.001 inch (1.02 ±.03 mm).

Dielectric withstanding voltage:

Sea level: Test voltage: 2,000 volts root mean square (rms). Test pin diameter: .040 ±.001 inch (1.02 ±.03 mm).

High altitude: Test voltage: 600 volts rms. Test pin diameter: .040 ±.001 inch (1.02 ±.03 mm).

Contact resistance:

Average for all contacts: 0.015 ohm maximum.

Individual contacts: 0.03 ohm maximum.

Continuity test circuit: With the header test-gage(s) inserted into the sockets(s) under test, the pins of the test-gage(s) and the contacts of the sockets(s) under test shall result in a series circuit. The header shall be the one used for electron tube 6AU6WB.

Mechanical

Insertion and withdrawal force:

Initial insertion force: 15 pounds (66.72 newton) maximum.

Average insertion force: 12 pounds (53.38 newton).

Initial withdrawal force: 4 pounds (17.79 newton) minimum, 12 pounds (53.38 newton) maximum.

Vibration: The test gage shall be in approved electron-tube type 6AU6WC, in accordance with MIL-E-1/952.

Durability: After the durability test, the withdrawal force shall be 2 pounds (8.90 newton) minimum.

Static load: 40 pounds (177.93 newton).

Float: With a pin of .041 inch (1.04 mm) diameter and .271 inch (6.88 mm) minimum length fully inserted in a socket contact, the contact shall be capable of free movement (float) within the contact cavity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

Saddle (with shield base): The saddle shall be integral with the shield base. The method of attachingthe saddle (with shield base) to the insulator body, and the shape of the saddle (with shield base) where attachment is effected, are optional.

The part shall be designed to operate at the following conditions:

Environmental

Operating temperature: See table I.

TABLE I. Dash number and characteristics.

Dash number	Operating temperature °C	Insulating material	Old type designator and replacement data 1/
-01	200	Ceramic	TS102C01 (2-way)
-02	100	SDG-F or GDI-30F	TS102P01 (1-way)
-03	100	MIL-M-14(type MFE)	TS102P01 (2-way)

1/ 1-way replacement: The new item (designated by military part number) will replace the old item (formerly designated by type designator); however, the old item will not replace the new item.
2-way replacement: The two items are interchangeable; i.e., the new item will replace the old item, and the new item will replace the new item.

Ratings (absolute maximum):

Voltage:
Sea level: 500 volts rms.
50,000 feet (15240 meters): 225 volts rms.

Current: 1 amperes.

Operating temperature: See table I.

Test gage details: See table II and MIL-PRF-12883 appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.


TABLE II. Test gage details. 1/ 2/

Inspection	A pin length (mm)	B Pin dia (mm)	M Test-end dia (mm)	C Pin-circle dia (mm)	N Probe-end dia (mm)	D Gage dia max (mm)	No. of pins	Total weight of gage ounces (grams) (±5%)
Insertion and withdrawal force------	.276 ±.005 (7.01 ±0.13)	.0390 ±.0001 (9.525 ±0.003)	---	.3750 (9.525) basic	---	11/16 (17.46)	7	---
Contact resistance-	.276 ±.005 (7.01 ±0.13)	.0390 ±.0001 (9.525 ±0.003)	---	.3750 (9.525) basic	---	11/16 (17.46)	7	---
Contact retention--	.276 ±.005 (7.01 ±0.13)	---	.0390 ±.0001 (.991 ±0.003)	---	.0410 ±.0001 (1.041 ±0.003)	---	---	3 (85.05)
Durability---	.276 ±.005 (7.01 ±0.13)	.0410 ±.0001 (1.041 ±0.003)	---	.3750 (9.525) basic	---	11/16 (17.46)	7	---

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

Mating-base dimensions: Sockets shall accommodate plug-in components having mating-base dimensions as shown on figure 2.

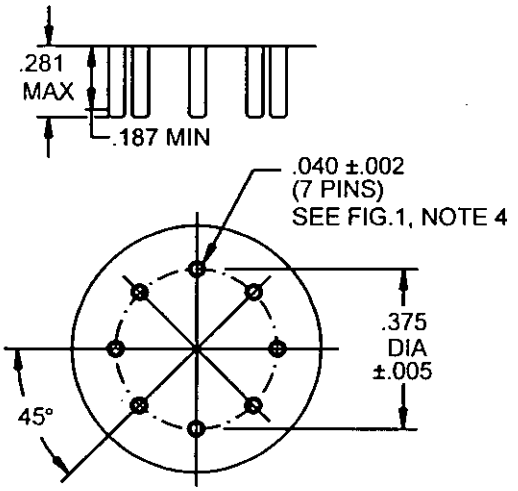


Inch	mm
.002	0.05
.005	0.13
.040	1.02
.187	4.75
.281	7.14
.375	9.52

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.002 inch (0.05 mm).

FIGURE 2. Mating-base dimensions.

Part or identifying number (PIN): The PIN shall consist of the basic number of this specification sheet and the dash number from table I.

Example

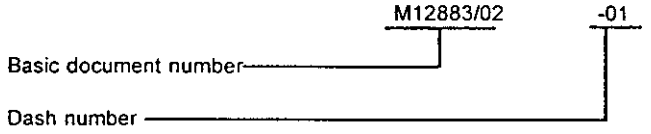

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:29Z
Check the source to verify that this is the current version before use.

The Government PIN, specified in table III, supersedes the following commercial part numbers.

TABLE III. Supersession and cross reference data.

Active Government PIN	Superseded part number					
	CAGE 72825	CAGE 80009	CAGE 28499	CAGE 10001	CAGE 10001	CAGE 77820
M12883/02-01 M12883/02-02 M12883/02-03	TBD 9726-153-5 TBD	NA 14-1049-00 NA	NA 69005-77130 NA	865200 NA NA	879231PC10 3 NA NA	C287037-2 NA NA

Active Government PIN	Superseded part number					
	CAGE 81350	CAGE 18876	CAGE 99993	CAGE D1901	CAGE 96214	CAGE 26600
M12883/02-01	JANS28	8027423 829190	N16S62603-6700	TSE9T102	402656-5	147-913 147-925

Active Government PIN	Superseded part number					
	CAGE 37695	CAGE 13499	CAGE 03538	CAGE 49956	CAGE D8385	CAGE 80045
M12883/02-01	187882-5	220-1111-00	232B847P 2	282-01001P1 282-1001P1 282- MS008P001	3050015171 3050025171 831B28E	398669

Active Government PIN	Superseded part number			
	CAGE 71785	CAGE D1901	CAGE 80249	CAGE 03538
M12883/02-01	111-11-22-142 13723 53B12363NEW 53B13723 53C20350PHBR 54B12599 7XC 7XCOLD 7XM	D1901	350005-12	TSE9T107472349P001

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Navy - EC
ARMY - CR
Air Force - 85

Preparing activity:
DLA - ES

(Project 5935-4015-02)

Review activity:
Navy - AS, CG, MC, SH
Air Force - 11, 17, 99
Army - AT, AV, EA, MI, ME

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.