INCH-POUND

MIL-PRF-12883/3D
28 June 1996
SUPERSEDING
MIL-S-12883/3C
17 November 1970


PERFORMANCE SPECIFICATION SHEET

SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS
(ELECTRON TUBE, TOP MOUNTING, SADDLE TYPE WITH SHIELD BASE, 9 CONTACT, RADIAL)

Inactive for new design after 11 July 1968. For new design use MIL-PRF-12883/11

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-12883.

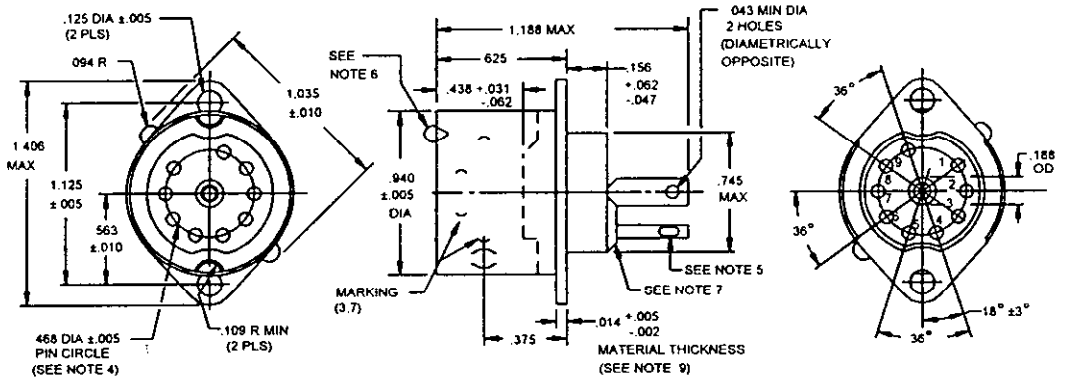

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.043	1.09	.125	3.18	.563	14.30	1.125	28.53
.005	0.13	.047	1.19	.156	3.96	.625	15.88	1.188	30.18
.010	0.25	.062	1.57	.188	4.78	.745	18.92	1.406	35.71
.014	0.36	.094	2.39	.375	9.53	.940	23.88		
.031	0.79	.109	2.77	.438	11.13	1.035	26.29		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 inch (0.41 mm) and ±1/2° on angles.
4. Nine contact cavities equally spaced throughout 288° of arc, and each cavity located within 1/2° of true position, shall be established along the pin circle.
5. Each contact tab shall have either 2 wire holes of .040 inch (1.02 mm) minimum width and .075 inch (1.91 mm) minimum length, or 1 hole of .040 inch (1.02 mm) minimum width and .125 inch (3.18 mm) minimum length. The hole, or holes, shall lie on the longitudinal centerline of the contact tab within ±.008 inch (0.20 mm).
6. An orientation slot or tongue, or other suitable means to serve as a guide for proper positioning of an applicable electron tube in the socket contacts, shall be placed on the shield mounting between contacts 1 and 9.
7. The design of bosses and the shape of barrier, when used, are optional. When present, barriers shall have a maximum height of .062 inch (1.57 mm).
8. Clearance between the cavity wall and the contact, with the contact in any position, shall be no greater than .018 inch (0.46 mm).
9. Material thickness of mounting flange shall be measured in an area where burring or dishing of the mounting hole is not present.

FIGURE 1. Socket configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1, and table I.

Reference material: (see 3.1.1 of MIL-PRF-12883).

Insulating material: Ceramic, SDG-F, GDI-30 or MIL-M-14, type MFE.

Contact cavities: One shape only; D-shaped or circular, at option of the manufacturer.

Float: With a pin of .041 inch (1.04 mm) diameter and .271 inch (6.88 mm) minimum length fully inserted in a socket contact, the contact shall be capable of free movement (float) within the contact cavity.

Saddle (with shield base): The saddle shall be integral with the shield base. The method of attaching the saddle (with shield base) to the insulator body, and the shape of the saddle (with shield base) where attachment is effected, are optional.

Electrical

Insulation resistance: 1,000 megohms minimum. Test pin diameter: .040 ±.001 inch (1.02 ±.03 mm).

Dielectric withstanding voltage:

Sea level: Test voltage: 2,000 volts root mean square (rms). Test pin diameter: .040 ±.001 inch (1.02 ±.03 mm).

High altitude: Test voltage: 660 volts rms. Test pin diameter: .040 ±.001 inch (1.02 ±.03 mm).

Contact resistance:

Average for all contacts: 0.015 ohm maximum.

Individual contacts: 0.03 ohm maximum.

Continuity test circuit: With the header test-gage(s) inserted into the socket(s) under test, the pins of the test-gage(s) and the contacts of the sockets(s) under test shall result in a series circuit. The header shall be the one used for electron tube 12AT7WA.

Mechanical

insertion and withdrawal force:

Initial insertion force: 20 pounds (88.96 newton) maximum.

Average insertion force: 15 pounds (66.72 newton) maximum.

Initial withdrawal force: 4 pounds (17.79 newton) minimum; 15 pounds (66.72 newton) maximum.

Vibration: The test gage shall be an approved electron-tube type 12AT7WA, in accordance with MIL-E-1/3.

Durability: After the durability test, the withdrawal force shall be 2 pounds (8.90 newton) minimum.

Static load: 52 pounds (231.31 newton).

The part shall be designed to operate at the following conditions:

Environmental

Operating temperature: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and characteristics.

Dash number	Operating temperature °C	Insulating material	Old type designator
-01 -02	200 100	Ceramic SDG-F, GDI-30-F, MIL-M-14 (type MFE)	TS103C01 TS103P01

Ratings (absolute maximum):

Voltage:
Sea level: 500 volts rms.
50,000 feet (15240 meters): 225 volts rms.

Current: 1 amperes.

Operating temperature: See table I.

Test gage details: See table II and MIL-PRF-12883 appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.


TABLE II. Test gage details. 1/ 2/

Inspection	A Pin length (mm)	B Pin dia (mm)	M Test-end dia (mm)	C Pin-circle dia (mm)	N Probe-end dia (mm)	D Gage dia max (mm)	No. of Pins	Total weight of gage ounces (grams) (±5%)
Insertion and withdrawal force------	.276 ±.005 (7.01 ±0.13)	.0390 ±.0001 (0.991 ±0.003)	---	.4680 (11.887) basic	---	47/64 (18.65)	9	---
Contact resistance-	.276 ±.005 (7.01 ±0.13)	.0390 ±.0005 (0.991 ±0.013)	---	.4680 (11.887) basic	---	47/64 (18.65)	9	---
Contact retention--	.276 ±.005 (7.01 ±0.13)	---	.0390 ±.0001 (0.991 ±0.003)	---	.0410 ±.0001 (1.041 ±0.003)	---	---	3 (85.05)
Durability---	.276 ±.005 (7.01 ±0.13)	.0410 ±.0001 (1.041 ±0.003)	---	.4680 (11.887) basic	---	47/64 (18.65)	9	---

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

Mating-base dimensions: Sockets shall accommodate plug-in components having mating-base dimensions as shown on figure 2.

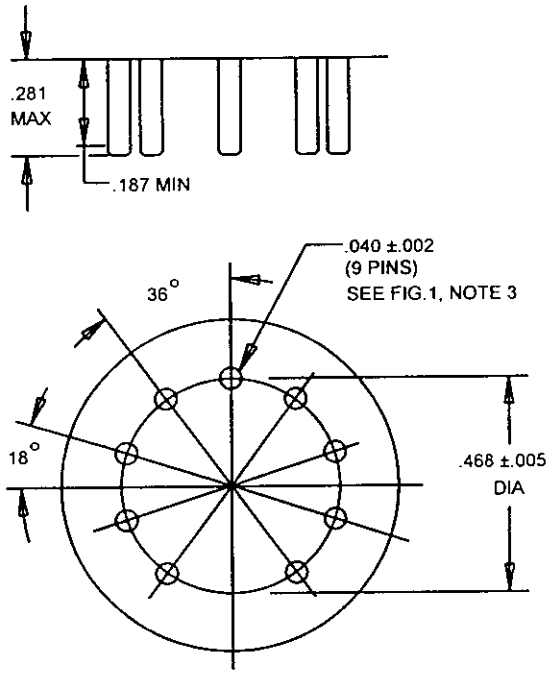


Inch	mm
.002	0.05
.005	0.13
.040	1.02
.187	4.75
.281	7.14
.468	11.89

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Mating-base dimensions.

Part or identifying number (PIN): The PIN shall consist of the basic number of this specification sheet and the dash number from table I.

Example

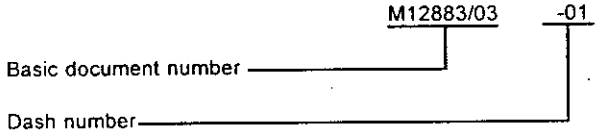

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

The Government PIN, specified in table III, supersedes the following commercial part numbers.

TABLE III. Supersession and cross reference data.

Active Government PIN	Superseded part number					
	CAGE 72825	CAGE 91662	CAGE 06845	CAGE K0991	CAGE 95354	CAGE 73138
M12883/03-01 M12883/03-02	9713-342-5 TBD	BRCP286-125 NA	C287037-1 NA	PC81816-1 NA	SMU195-125 NA	SRE-410 NA

Active Government PIN	Superseded part number					
	CAGE 80249	CAGE 28499	CAGE 18876	CAGE 74970	CAGE 28480	CAGE 71785
M12883/03-01	S01189	S0439-1-6X	10300889	120-199	120-25 1200-0019	121-39-21-016 121-39-22-011 44B13373 44B22786 53F12826 9JC2 9XB

Active Government PIN	Superseded part number					
	CAGE 81755	CAGE 13499	CAGE 49956	CAGE 56232	CAGE 08385	CAGE 79318
M12883/03-01	174PH	220-1104-00 220-1104-000	282-1002P1 282-1002P2	284559	3050015169	3400-0070

Active Government PIN	Superseded part number					
	CAGE 96214	CAGE D1901	CAGE 94033	CAGE 14100	CAGE 01365	CAGE 04655
M12883/03-01	402656-2	5M5711-220-35	587B5-7	666068-562	703-187	7490-0100

Active Government PIN	Superseded part number	
	CAGE 82577	CAGE 72825
M12883/03-01	968508-7	9714-16 9714-20

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:29Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian
ARMY - CR
Navy - EC
Air Force - 85

Preparing activity:
DLA - ES

(Project 5935-4015-03)

Review activity:
Army - AT, AV, EA, MI, ME, AR
Air Force - 17, 19, 70
Navy - AS, CG, OS, SH

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:29Z
Check the source to verify that this is the current version before use.