INCH-POUND


MIL-PRF-12883/41E
28 June 1995
SUPERSEDING
MIL-S-12883/41D
20 December 1989

PERFORMANCE SPECIFICATION SHEET

SOCKET, PLUG-IN ELECTRONIC COMPONENTS,
FOR RELAYS, 2-POLE, 10 AMPERES
(MIL-R-6106 AND MIL-R-83536)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-12883.

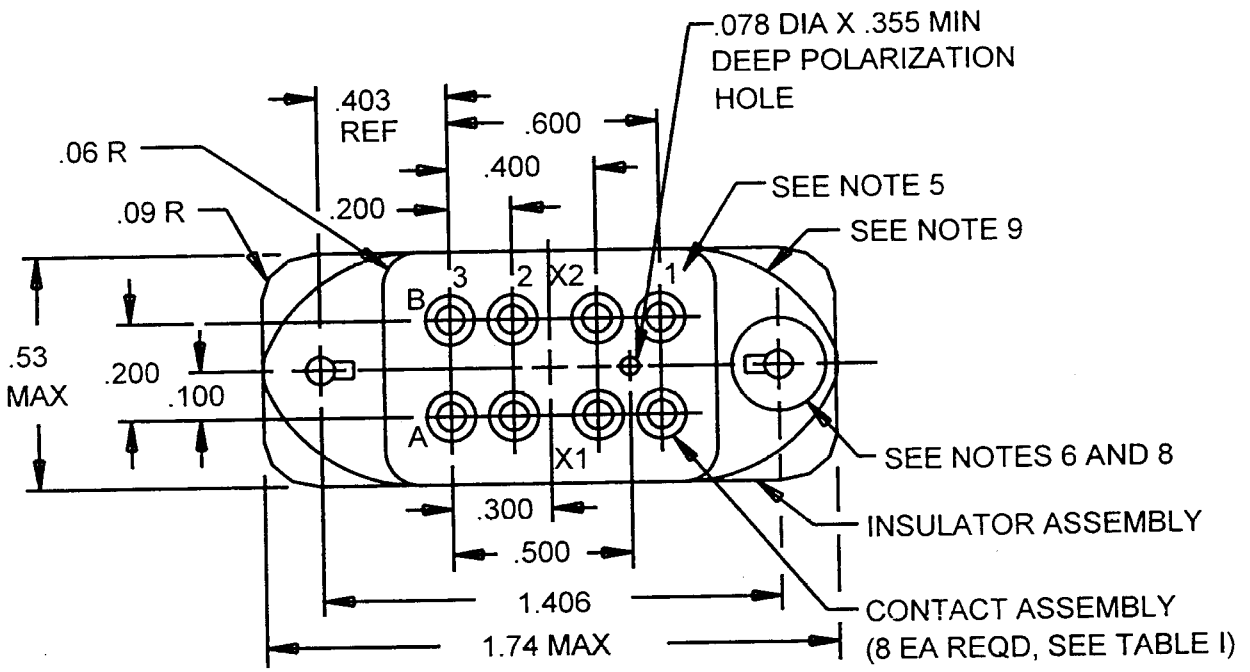

MATING FACE

-01, -04, -06, -09, -11, -14, -16, and -19


FIGURE 1. Socket configurations.

FSC 5935


AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

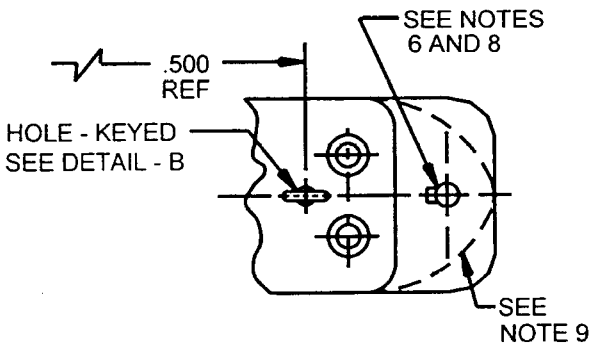


MATING FACE
-02, -12 loose studs
-07, -17 fixed studs

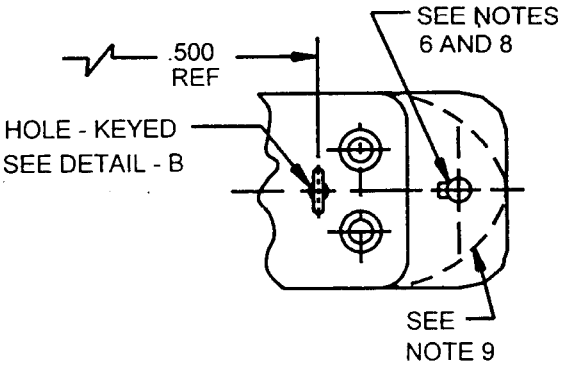


MATING FACE
-03, -13 loose studs
-08, -18 fixed studs

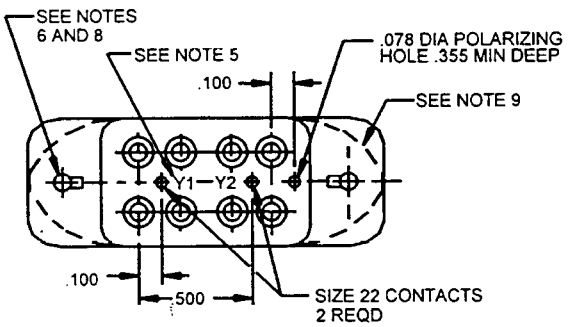


MATING FACE
-05, -15 loose studs
-10, -20 fixed studs

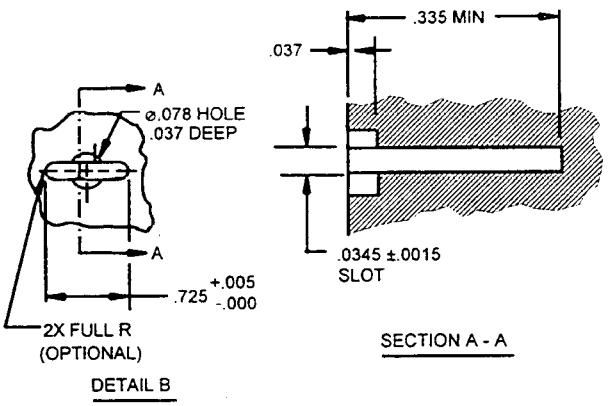

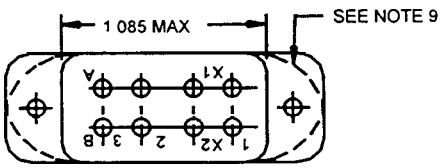


BOTTOM VIEW
-01, -02, -03, -04, -06
-07, -08, -09, -11, -12,
-13, -14, -16, -17, -18,
and -19

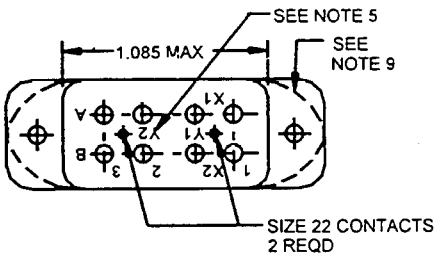


BOTTOM VIEW
-05, -10, -15 and -20

FIGURE 1. Socket configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

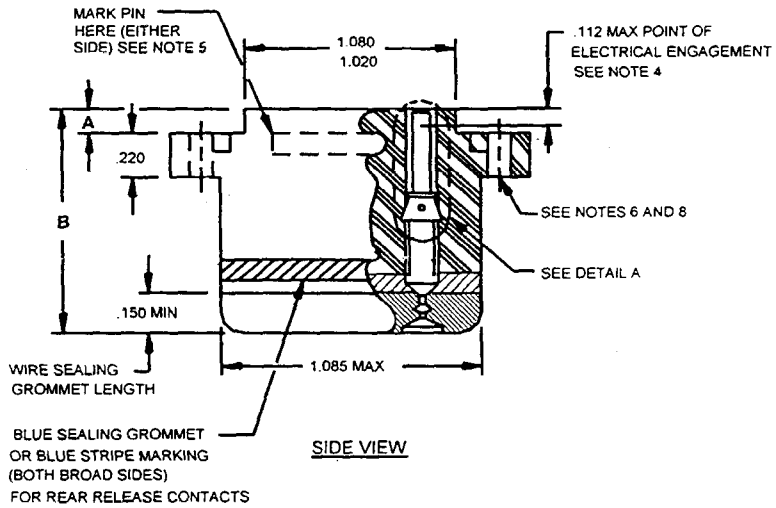

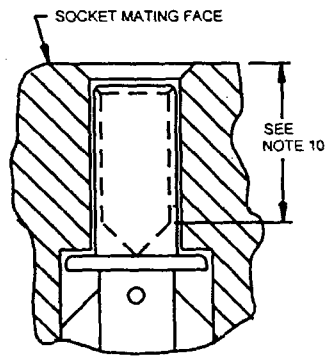


DETAIL A

Dimensions

Dash number	A (mm)	B max (mm)
-01 thru -10	.140 - .135 (3.56 - 3.43)	1.130 (28.70)
-11 thru -20	.093 (2.36)	.89 (2.26)

FIGURE 1. Socket configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

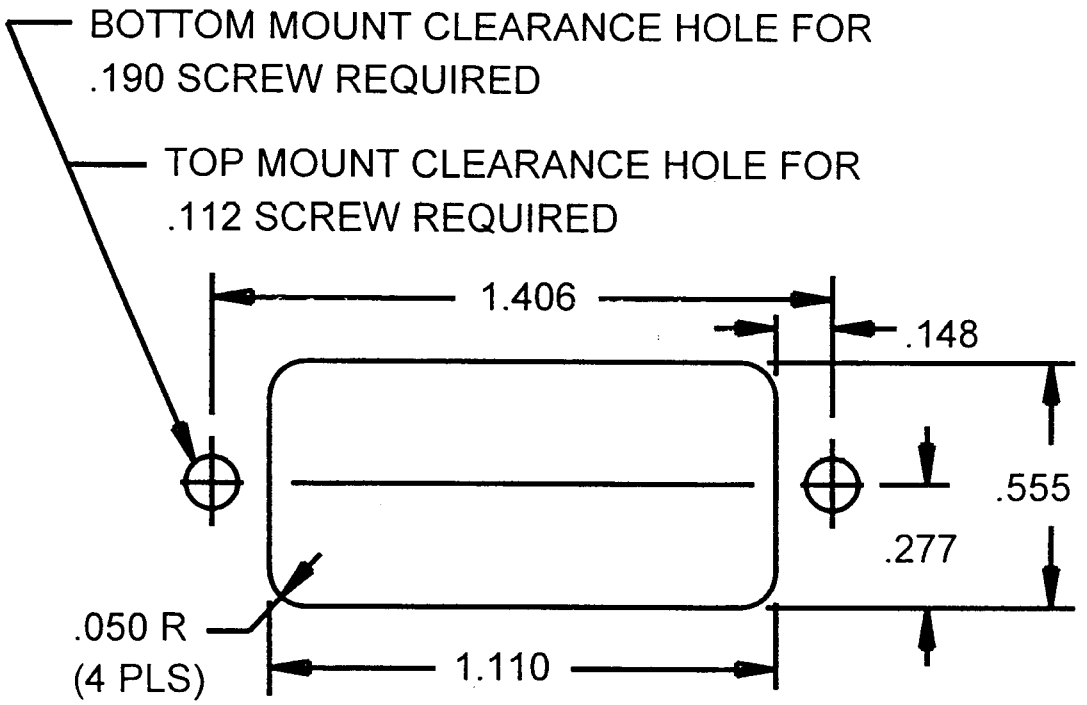


RECOMMENDED MOUNTING DIMENSIONS

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0015	0.040	.06	1.5	.140	3.56	.300	7.62	.555	14.10
.005	0.13	.078	1.98	.148	3.76	.335	8.51	.600	15.24
.010	0.25	.09	2.3	.150	3.81	.355	9.02	.89	22.6
.025	0.64	.093	2.36	.164	4.17	.370	9.40	1.025	26.04
.0345	0.876	.100	2.54	.200	5.08	.400	10.16	1.075	27.31
.035	0.89	.112	2.84	.220	5.59	.403	10.24	1.110	28.19
.037	0.94	.125	3.18	.233	5.92	.500	12.70	1.130	28.70
.05	1.3	.135	3.43	.277	7.04	.52	13.2	1.406	35.71
								1.71	43.4


NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ±.005 inch (0.13 mm) for three place decimals and ±.01 inch (0.25 mm) for two place decimals.
4. Point of electrical contact engagement, from mating face of socket insulator to the socket contact.
5. Marking shall be characters which are molded .035 inch (0.89 mm) minimum. Ink marking optional (see MIL-STD-1285).
6. Keyway is shown for loose stud mounting configuration only (see figure 2 detail A).
7. For mating relay (see table I).
8. Configuration mounting (see figures 2, 3, and table I).
9. Shape is optional
10. .370 inch (9.40 mm) min. for -01 through -10 and .233 inch (5.92 mm) min. for -11 through -20.

FIGURE 1. Socket configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

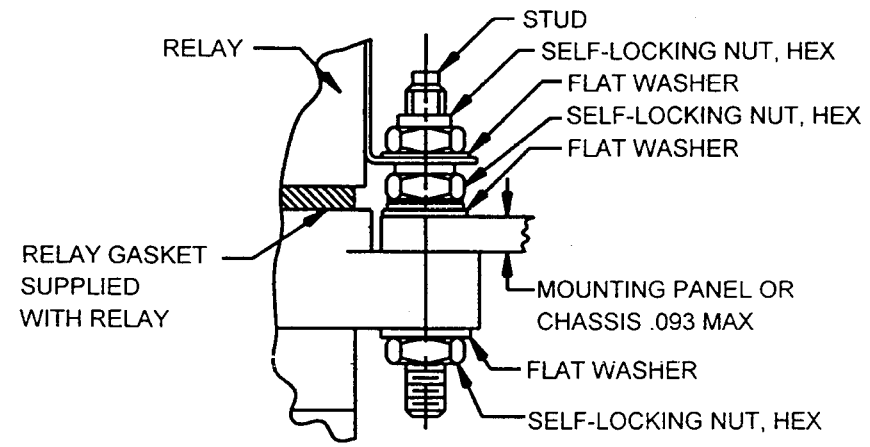


BOTTOM MOUNT (TYP)

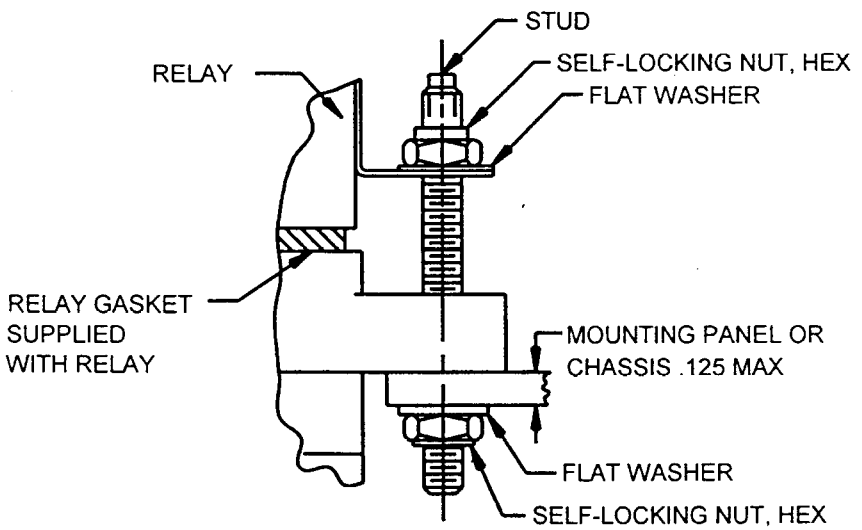


TOP MOUNT (TYP)

FIGURE 2. Loose stud mounting (-01 through -05 and -11 through -15).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

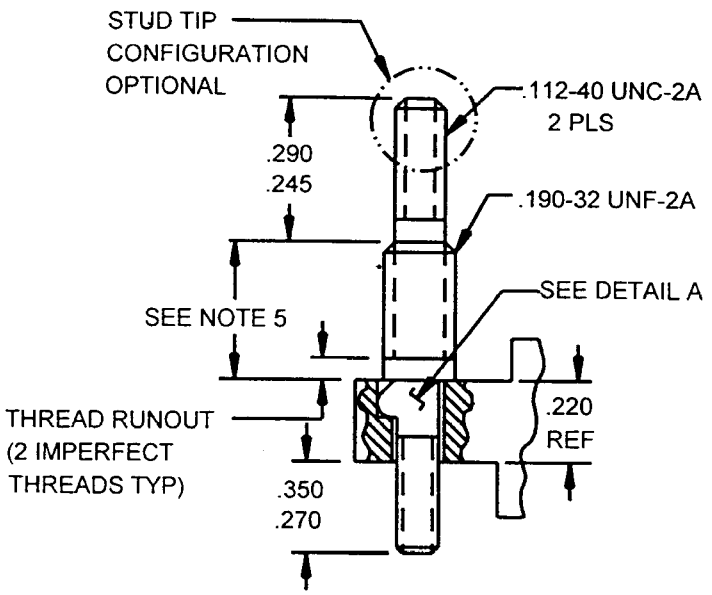

LOOSE STUD

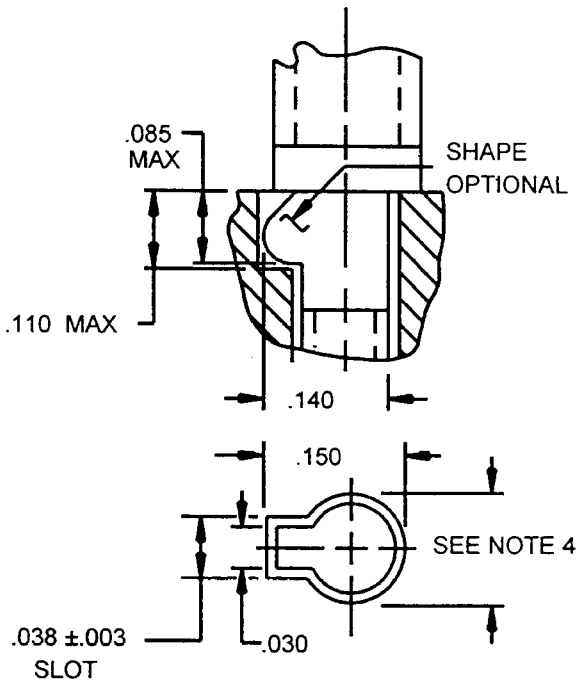

DETAIL A


SOCKET BODY MOUNTING
HOLE AND MATING STUD

Inches	mm	Inches	mm
.005	0.13	.220	5.59
.010	0.25	.245	6.22
.093	2.36	.270	6.86
.112	2.84	.290	7.37
.125	3.18	.318	8.08
.190	4.83	.350	8.89


NOTES
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified, tolerances are ±.005 inch (0.13 mm) for three place decimals and ±.01 inch (0.25 mm) for two place decimals.
4. The diameter for loose stud mating hole in the socket body shall be:
   for -01 through -05 diameter shall be .125 ±.003 inch (3.18 ±0.08 mm);
   for -11 through -15 diameter shall be .116 ±.003 inch (2.95 ±0.08 mm).
5. .318 ±.010 inch (8.08 ±0.25 mm) from top of socket flange to base of .112-40 UNC-2A thread for -01 through -05 and .290 ±.010 (7.37 ±0.25 mm) for -11 through -15.

FIGURE 2. Loose stud mounting (-01 through -05 and -11 through -15) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

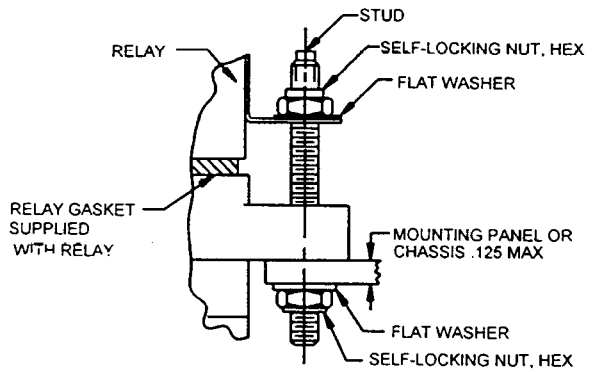

TOP MOUNT (TYP)

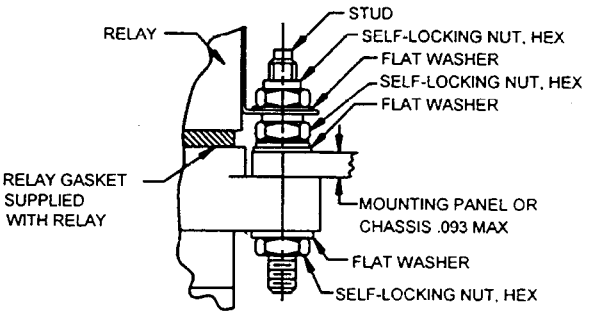

BOTTOM MOUNT (TYP)

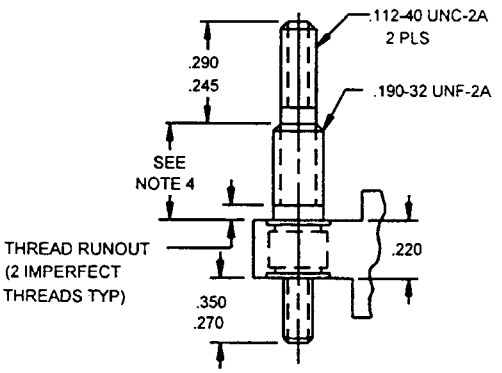

FIXED STUD

Inches	mm	Inches	mm
.005	0.13	.220	5.59
.010	0.25	.245	6.22
.093	2.36	.270	6.86
.112	2.84	.290	7.37
.125	3.18	.318	8.08
.190	4.83	.350	8.89

NOTES
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 inch (0.25 mm) for two place decimals.
4. .318 ±.010 inch (8.08 ±.25 mm) from, top of socket flange to base of .112-40 UNC-2A thread for -06 through -10 and .290 ±.010 inch (7.37 ±0.25 mm) for -16 through -20.

FIGURE 3. Fixed stud mounting (-06 through -10 and -16 through -20).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1, 2, 3, and table I.

Reference material: (see 3.1.1 of MIL-PRF-12883)

Insulator: Diallyl phthalate, in accordance with MIL-M-14, type SDG-F or any glass filled thermoplastic material in accordance with MIL-P-46179, or an approved equivalent material manufactured to a commonly accepted industry standard.

Color: Material color shall be optional providing that the color provides a contrasting background for the blue sealing grommet or blue color bands indicating rear release contacts.

Grommet: Silicon rubber in accordance with ZZ-R-765.

Mounting hardware: Corrosion resistant steel or steel with cadmium/chromate finish.

Electrical:

Insulation resistance: 1000 megohms minimum. Test pin diameter, size 16, .0620 ±.0010 inch (1.575 ±0.025 mm); test pin diameter, size 22, .0300 ±.0010 inch (0.762 ±0.025 mm).

Dielectric withstanding voltage:

Sea level: Test voltage, 1500 V rms. Test pin diameter, size 16, .0620 ±0.0010 inch (1.575 ±0.025 mm).

High altitude (80,000 feet (24,384 meters): Test voltage, 500 V rms. Test pin diameter, size 16 .0620 ±0.0010 inch (1.575 ±0.025 mm); test pin diameter, size 22, .0300 ±.0010 inch (0.762 ±0.025 mm).

Contacts: Contacts shall be removable crimp type in accordance with MIL-C-39029/92, MIL-C-39029/5 (see table I), or approved equivalent contacts manufactured to a commonly accepted industry standard.

TABLE I. Dash numbers and configurations.

Dash number	Mounting style	Contact size		Number of contacts	Contact designation M39029	1/ Mating relay
		Mating end	Wire barrel			
01	Loose stud (figure 2)	16	16	8	/5 - 116	M83536/9-024, /9-029, /10-024,
02	Loose stud (figure 2)	16	16	8	/5 - 116	M83536/11-002, /11-004, /11-007
03	Loose stud (figure 2)	16	16	8	/5 - 116	To be determined.
04	Loose stud (figure 2)	16	20	8	/5 - 117	2/ M83536/9-024, /9-029, /10-024
05 *	Loose stud (figure 2)	16 22	~~20~~16 22	8 2	/5 - ~~117~~116 /5 - TBD	MS27744-2, -4, -6, -8
06	Fixed stud (figure 3)	16	16	8	/5 - 116	M83536/9-024, /10-024,
07	Fixed stud (figure 3)	16	16	8	/5 - 116	M83536/11-002, /11-004, 11-007

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and configurations.

Dash number	Mounting style	Contact size		Number of contacts	Contact designation M39029	1/ Mating relay
		Mating end	Wire barrel			
08	Fixed stud (figure 3)	16	16	8	/5 - 116	To be determined.
09	Fixed stud (figure 3)	16	20	8	/5 - 117	2/ M83536/9-024, /9-029, 10-024
10 *	Fixed stud (figure 3)	16 22	16 22	8	/5 - 116 /5 - TBD	MS27744-2, -4, -6, -8
11	Loose stud (figure 2)	16	16	8	/92 - 533	M83536/9-024, /9-029, /10-024
12	Loose stud (figure 2)	16	16	8	/92 - 533	M83536/11-002, /11-004, /11-007
13	Loose stud (figure 2)	16	16	8	/92 - 533	To be determined.
14	Loose stud (figure 2)	16	20	8	/92 - 534	2/ M83536/9-024, /9-029, /10-024
15 *	Loose stud (figure 2)	16 22	16 22	8 8	/92 - 533 /92 - 531	MS27744-2, -4, -6, -8
16	Fixed stud (figure 3)	16	16	8	/92 - 533	M83536/9-024, /9-029, /10-024
17	Fixed stud (figure 3)	16	17	8	/92 - 533	M83536/9-024, /11-004, /11-002, /11-007
18	Fixed stud (figure 3)	16	16	8	/92 - 533	To be determined.
19	Fixed stud (figure 3)	16	20	8	/92 - 534	2/ M83536/9-024, /9-029, /10-024
20 *	Fixed stud (figure 3)	16 22	16 22	8 2	/92 - 533 /92 - 531	MS27744-2, -4, -6, -8

1/ Reference MIL-R-83536 for supersession data on MIL-R-6106 relays.
2/ CAUTION: Because of the wire barrel size of M83536/9-024, current overload may be experienced at 10 amperes.

Environmental:

Temperature range: Operating temperature range -70°C to +125°C.

Wire sealing: A resilient grommet is permanently bonded to the wire entry face of the socket so as to provide moisture sealing capabilities (see figure 1). Wire sealing range shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

TABLE II. Wire sealing range.

Contact size	Wire sealing range (mm)
22-22	.030 min to .054 max (0.76 min to 1.37 max)
16-20	.040 min to .083 max (1.02 min to 2.11 max)
16-16	.065 min to .109 max (1.65 min to 2.77 max)

Mechanical:

Vibration (sinusoidal): In accordance with MIL-STD-202, method 204, test condition G, or an equivalent industry standard.

a. Except that the frequency range shall be varied logarithmically between the limits of 10 Hz and 3,000 Hz.

b. Except that the procedure of method 201 of MIL-STD-202 may be applied during 10 Hz to 55 Hz band of the vibration frequency range.

c. Qualified mating relay shall be used as a test gauge.

Vibration (random): In accordance with MIL-STD-1344, method 2005, test condition V, letter G, or an equivalent industry standard, with a test duration 15 minutes. The mating relay shall be used as the test gage.

Shock (mechanical): In accordance with MIL-STD-202, method 213, condition C, or an equivalent industry standard, except peak value shall be 200 g's.

Insertion and withdrawal forces: The insertion and withdrawal forces of the relay and socket shall be as specified as in table III.

TABLE III. Insertion and withdrawal forces.

M12883/41	-01 through -04, -06 through -09 -11 through -14, -16 through -19	-05, 10, -15, and -20
Initial Insertion force (max)	15 lbf (66.72 newton)	17.5 lbf (77.84 newton)
Withdrawal force (min)	1.0 lbf (4.45 newton)	1.1 lbf (4.89 newton)
Insertion force (max) after 10 insertions and withdrawals, before vibration	15 lbf (66.72 newton)	17.5 lbf (77.84 newton)
Withdrawal force (min)	1.0 lbf (4.45 newton)	1.1 lbf (4.89 newton)
After vibration Insertion force (max)	14 lbf (62.28 newton)	16.25 lbf (72.28 newton)
Withdrawal force (min)	.75 lbf (3.34 newton)	.82 lbf (3.65 newton)

Mounting hardware: The mounting hardware shall allow mounting the socket above, or below the panel ochassis (see figures 2 and 3), and shall allow mounting and securing the relay to the socket without disturbing the mounted socket or access to the wiring side of the socket. The hardware shall provide the nominal spacing between socket surface and relay mounting flange, regardless of mounting configuration,(see figures 2 and 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

Supplied with relay socket:

4 each .112-40 self locking nuts (.206 max dia x .176 max height).

4 each .112 flat washers (.220 max O.D. x .018 max thick).

2 each .190-32 self locking nuts (.330 max dia x .190 max height).

2 each .190 flat washers (.360 max O.D. x.036 max thick).

2 each studs for loose mounting configuration only (see figure 2).

Fixed mounting studs: Studs shall be fixed into the mounting flange of the socket and shall be designed so as to prevent rotation of the stud within the flange (see figure 3).

Contact installation tools: see table IV, approved equivalent industry standard tools may also be used where appropriate.

TABLE IV. Contact installation tools.

Nomenclature	Part or Identifying Number (PIN) (size 16 contacts)	Part or Identifying Number (PIN) (size 22 contacts)
Crimp tool	M22520/1-01, /7-01	M22520/2-01
Positioner	M22520/1-02, /7-03	M22520/2-06
Insertion/removal tool Unwired Wired	 M81969/30-06, /30-05 M81969/8-06, /8-08, /14-02 /14-03,	 M81969/30-01 M81969/8-04, /14-01

Torque: Relay socket and hardware shall be subjected to torque testing as specified in table V. Sockets shall be installed in mounting panel when test torque is applied. No visual evidence of physical damage shall be permitted. Torque shall be maintained for a reasonable period of time to insure stud, socket, and associated hardware have not been damaged (see table V).

TABLE V. Torque requirements (installed in panel conditions).

Thread size	Torque			
	Testing		Installation	
	Inch-pounds	Newton-meters	Inch-pounds	Newton-meters
.112-40	8 + 1 - 0	0.90 + .11 - 0	4 ±1	0.45 ±.11
.190-32	24 + 1 - 0	2.71 + .11 - 0	18 ±1	2.03 ±.11

Weight: Maximum weight of relay, socket, all contacts and all associated hardware shall be as specified in table VI.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

TABLE VI. Weight.

Part designations M12883/41	Maximum weight	
	Pounds	Grams
-01 through -10	.073	33
-11 through -20	.055	25

PIN: The PIN shall be marked on the socket body as shown in the example (see figure 1). The PIN shall consist of the basic number of this specification sheet and the dash number from table I.

Example

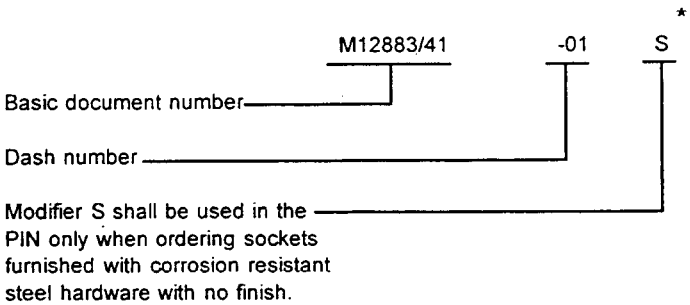

* For future acquisition of these sockets as of the effective date of revision D, 20 December 1989, parts identified with an "S: modifier shall be corrosion resisting steel (CRS), and parts without an "S" modifier shall be cadmium chromate finish. No mixing of hardware types shall be permitted.

Ordering data: Sockets without contacts may be ordered when so indicated in the ordering data (see MIL-PRF-12883). This applies only to original equipment manufacturers (OEM's) and subcontractors. All direct shipments to the government shall include all applicable contacts and mounting hardware. The PIN to be marked on the socket shall be as shown in the PIN example (see figure 1 and table I).

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

The Government PIN, specified in table VII, supersedes the following commercial part numbers.

TABLE VII. Supersession and cross reference.

Active Government PIN	Superseded manufacturer part number			
	CAGE 58982	CAGE 99699	CAGE F7913	CAGE S3140
M12883/41-01	RSL116091 AND S	SE210-2001 AND S	TBD	NA
M12883/41-02	RSL116093 AND S	SE210-2002 AND S	TBD	NA
M12883/41-03	RSL116095 AND S	SE210-2003 AND S	TBD	NA
M12883/41-04	RSL116097 AND S	TBD	TBD	NA
M12883/41-05	RSL116099 AND S	TBD	TBD	NA
M12883/41-06	RSL116063 AND S	SE210-1001 AND S	TBD	NA
M12883/41-07	RSL116065 AND S	SE210-1002 AND S	TBD	NA
M12883/41-08	RSL116067 AND S	SE210-1003 AND S	TBD	NA
M12883/41-09	RSL116069 AND S	TBD	TBD	NA
M12883/41-10	RSL116071 AND S	TBD	TBD	NA
M12883/41-11	RSE116685 AND S	SME210-2001 AND S	001585 351 07 A 1	07.342.6102
M12883/41-12	RSE116687 AND S	SME210-2002 AND S	001585 352 07 A 1	NA
M12883/41-13	RSE116689 AND S	TBD	001585 353 07 A 1	NA
M12883/41-14	RSE116691 AND S	SME210-2004 AND S	001585 351 07 A 2	NA
M12883/41-15	RSE116693 AND S	TBD	001585 355 07 A 1	NA
M12883/41-16	RSE116695 AND S	SME210-1001 AND S	001585 351 06 A 1	NA
M12883/41-17	RSE116697 AND S	SME210-1002 AND S	001585 352 06 A 1	NA
M12883/41-18	RSE116699 AND S	TBD	001585 353 06 A 1	NA
M12883/41-19	RSE116701 AND S	SME210-1004 AND S	001585 351 06 A 2	NA
M12883/41-20	RSE116703 AND S	TBD	001585 355 06 A 1	NA

CONCLUDING MATERIAL

Custodian:
ARMY - CR
NAVY - EC
Air Force - 85

Review activity:
Army - AR, AT, AV, ME
Navy - AS, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - ES

(Project 5935-3990-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.