PERFORMANCE SPECIFICATION SHEET

SOCKET, PLUG-IN ELECTRONIC COMPONENTS,
FOR RELAYS, 2-POLE, 10 AMPERES
(MIL-R-6106 AND MIL-R-83536)

This amendment forms part of MIL-PRF-12883/41E, dated 28 June 1995, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

FIGURE 1, Socket configurations - Continued, Detail B and Section A-A: Delete and substitute with figure below.

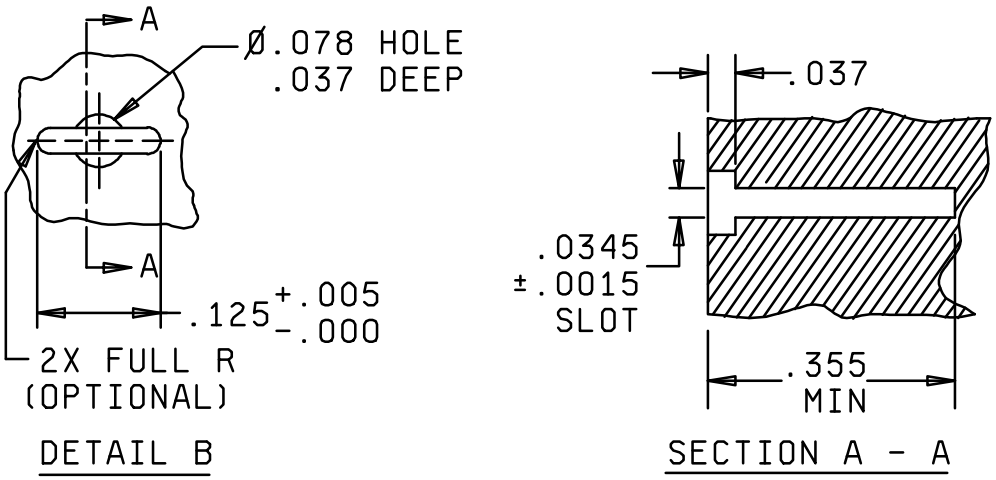

PAGE 8

TABLE I, dash number 05, Contact size, Wire barrel column: Delete “20” and substitute “16”. Contact designation column: Delete “/5-117” and substitute “/5-116”.

PAGE 9

TABLE I, dash number 17, Contact size, Wire barrel column: Delete “17” and substitute “16”.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.

TABLE IV: Delete and substitute:

"TABLE IV. Installing and removal tools contact.

Contact type M39029/	Basic crimping Tool	Positioner tool M22520	Installing tool M81969	Removal	
				Wired contact M89169	Unwired contact M89169
5-116	M22520/1-01 or M22520/7-01	/1-02 Blue or /7-03	/8-07 /14-03	/8-08 /14-03	/30-06
5-117	M22520/1-01 or M22520/7-01	/1-02 Blue or /7-03	/8-05 /14-02	/8-06 /14-02	/30-05
92-531	M22520/2-01	/2-06	/8-03 /14-01	/8-04 /14-01	/30-01
92-533	M22520/1-01 or M22520/7-01	/1-02 Blue or /7-03	/8-07 /14-03	/8-08 /14-03	/30-06
92-534	M22520/7-01 or M22520/1-01	/1-02 Blue /7-03	/8-07 14-03	/8-08 /14-03	/30-05

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4230)

Review activities:
Army - AR, AT, AV
Navy - AS, MC, OS, SH
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:33Z
Check the source to verify that this is the current version before use.