MILITARY SPECIFICATION SHEET

SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS (SOCKET-RELAY, ELECTRICAL, 20 CONTACT, 5 AMPERES)

The complete requirements for procuring the sockets and accessories described herein shall consist of this document and the latest issue of Specification MIL-S-12883.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.


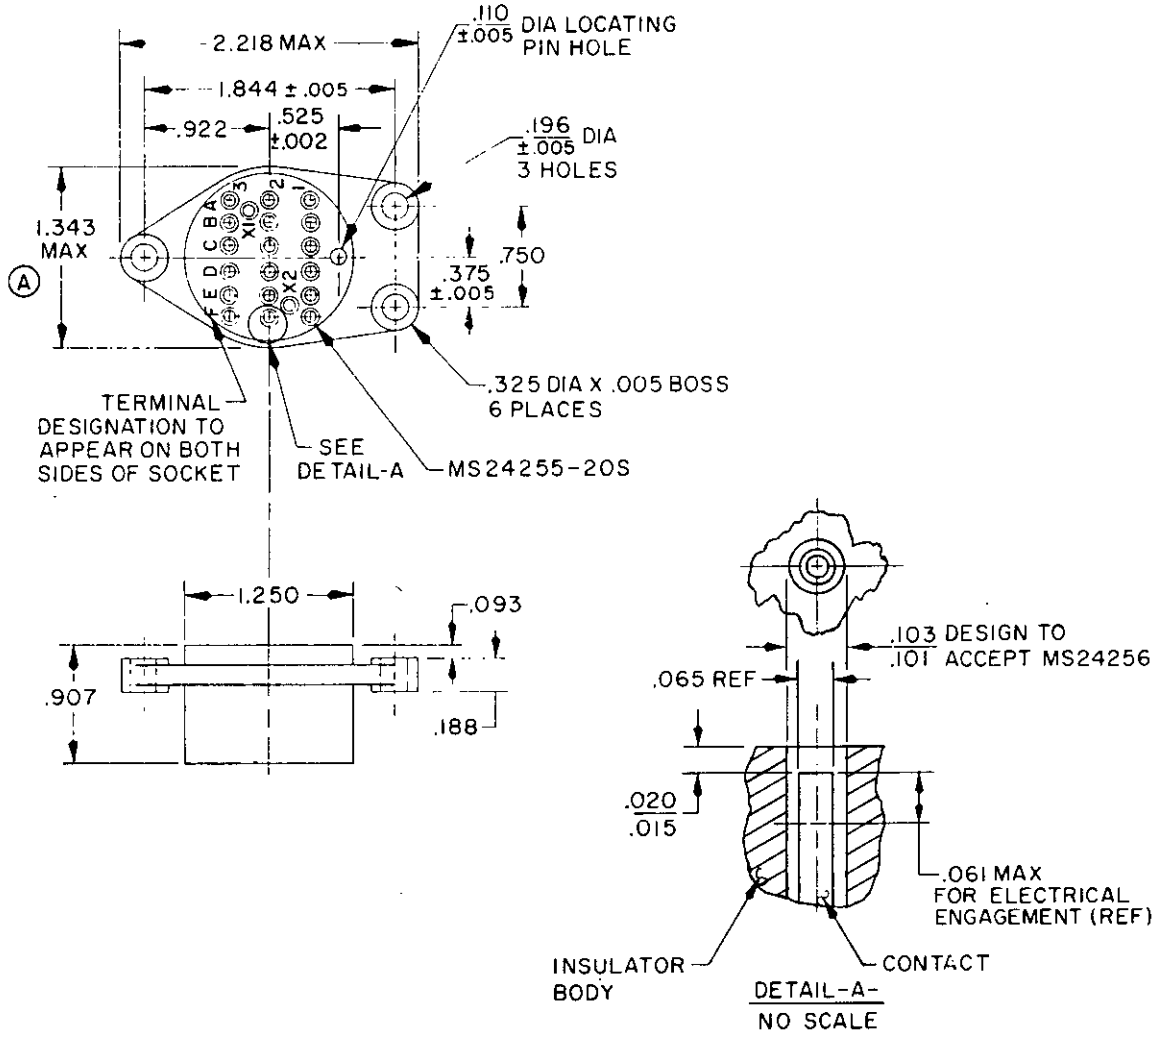


FIGURE 1. Socket configuration.


Ⓐ denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:32Z
Check the source to verify that this is the current version before use.

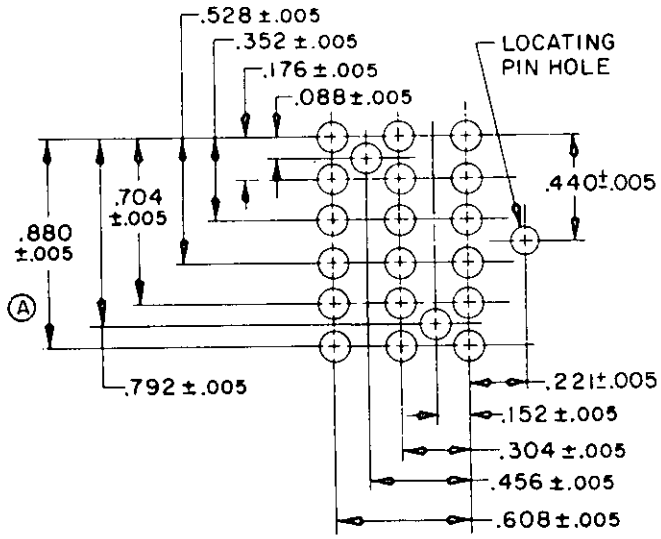

PIN RECEPTACLE LAYOUT

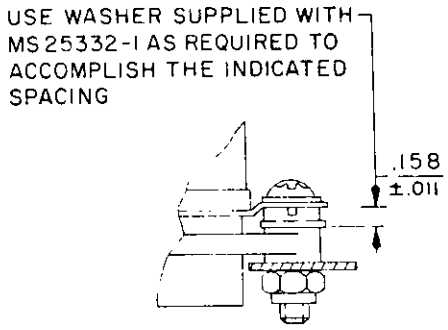

TOP MOUNTED

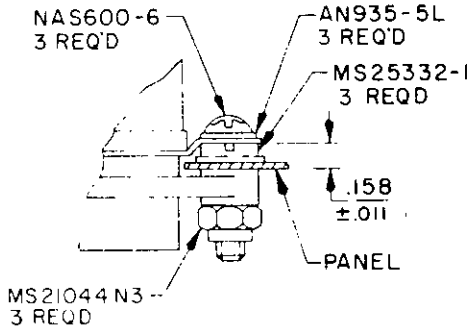


BOTTOM MOUNTED

Hardware to be supplied with socket (in separate package)

23 ea.	MS24255-20S	Crimp removable socket contacts
3 ea.	NAS600-6	Screws
3 ea.	AN935-5L	Washers
3 ea.	MS25332-1	Screw and washer assembly
3 ea.	MS21044N3	Hex nuts

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.101	2.57	.304	7.72	.792	20.12
.005	.13	.103	2.62	.325	8.26	.880	22.35
.010	.25	.110	2.79	.352	8.94	.907	23.04
.011	.28	.152	3.86	.375	9.53	.922	23.42
.015	.38	.158	4.01	.440	11.18	1.250	31.75
.020	.51	.176	4.47	.456	11.58	1.281	32.54
.061	1.55	.188	4.78	.525	13.34	1.343	34.11
.065	1.65	.196	4.98	.528	13.41	1.844	46.84
.088	2.24	.218	5.54	.608	15.44	2.218	56.34
.093	2.36	.221	5.61	.704	17.88		
				.750	19.05		

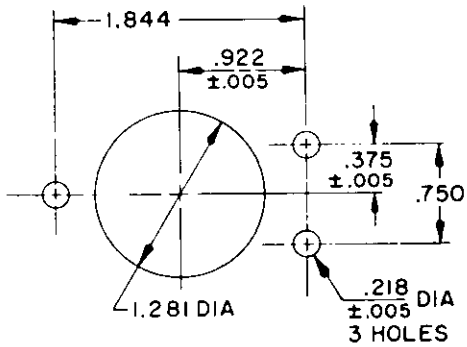

MOUNTING HOLE LAYOUT

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.010.
4. Sockets must fit the mounting hole when mounted from the top or bottom.
5. The shape of the saddle attached to the insulator body, and the shape of the ground terminal lugs are optional.

Ⓐ 6. Part number marking shall appear on the top surface.

Socket configuration - Continued.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure.

Sockets: Sockets shall be physically and electrically compatible with mating relay MS25329(ASG).

Contact cavities: Contact cavities shall be so designed to accept MS24256(USAF) tool for insertion and removal of the contact.

Contacts: Only those individual socket contacts which have been qualified in accordance with MIL-C-26636(USAF), and which meet the requirements of MS24255(USAF), shall be used.

Insertion and withdrawal forces:
Initial insertion force: 20 pounds maximum.
Initial withdrawal force: 4 pounds minimum, 20 pounds maximum.

Insulation resistance: 1,000 megohms minimum.
(Test pin diameter: Size 20: 0.040 ±.001 inch.)

Dielectric withstanding voltage:
Sea level: Test voltage: 2,500 volts root mean square (rms).
(Test pin diameter: Size 20: 0.040 ±0.001 inch.)
High altitude (80,000 feet): Test voltage: 500 volts rms.
(Test pin diameter: Size 20: 0.040 ±0.001 inch.)

Contact retention: Contacts assembled in the applicable sockets shall be subjected to the contact retention test requirements specified in MIL-C-26482.

Contact resistance: Resistance of mated pairs of pin and socket contacts shall conform to the requirements of MIL-C-26636(USAF).

Vibration: Sockets shall meet the requirements of method 204, test condition B, MIL-STD-202 (15 G's, 10 to 2,000 Hz), with an approved mating relay inserted for use as a test-gage.

Mechanical shock: Sockets shall meet the shock requirements specified in MIL-S-12883 with an approved mating relay inserted for use as a test-gage.

Durability: After durability test, the withdrawal force shall be 4 pounds minimum. An approved mating relay, or a test gage conforming to the pin layout dimensions of MS25329(ASG) shall be used to perform the durability test.

Socket weight (excluding hardware): Shall be 0.060 pound maximum.

TABLE I. Military part number and descriptive information.

Military part number	Material
M12883/22-01	Plastic (MIL-M-14, type SDG-F, or MIL-P-19833, type GDI-30F)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:32Z
Check the source to verify that this is the current version before use.

OPERATING INFORMATION:

Ratings (absolute maximum):
Voltage:
Sea level: 500 volts rms.
80,000 feet: 225 volts rms.
Current: 5.0 amperes.
Operating temperature range: -55° to 100°C.

Military part number: Consists of the letter "M", the basic number of this specification sheet and an assigned dash number taken from table I.

Example: M12883/22-01

Military designator — Specification sheet number — Dash number

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - MI, ME, AV
Navy - SH
Air Force - 11, 17, 70, 85
DSA - ES

User activities:
Army - AT, WC
Navy - MC, AS, OS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1702-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:32Z
Check the source to verify that this is the current version before use.