MILITARY SPECIFICATION

FOOD CONTAINER: VACUUM OR INSULATED, WITH INSERTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size vacuum or insulated food container, with four (4) removable inserts and covers for the mass transportation and serving of hot or cold prepared foods.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATION

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking for U.S. Military Property

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

The cover shall have suitable quick connect and disconnect [illegible] container body.

Department of Health, Education, and Welfare, Public Health Service

Publication No. 934 - Food Service Sanitation Manual

(Application for copies should be addressed to Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal, shall apply:

American Society for Testing and Materials (ASTM)

Designation A167 - Stainless and Heat-Resisting Chromium - Nickel Steel Plate, Sheet, and Strip, Standard Specification for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA. 19103.)

National Sanitation Foundation (NSF)

Standard No. 2 - Food Service Equipment
Standard No. C-2 - Special Equipment and Devices
Listing of Food Service Equipment

(Application for copies should be addressed to the National Sanitation Foundation, NSF Building, Ann Arbor, Michigan 48105.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

List of Accepted Equipment for Interstate Carrier Use

(Application for copies should be addressed to the nearest regional office of the US Public Health Service.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

3.2 Standard product. The containers delivered under this specification shall be the manufacturer's standard commercial product, except for any changes necessary to meet specification requirements. All containers furnished on any one contract, including parts and subassemblies thereof shall be new and interchangeable.

3.3 Codes and standards. The container and inserts shall conform either to the applicable requirements of NSF Standard Nos. 2 and C-2 or to the applicable requirements of the US Public Health Service, Food Service Sanitation Ordinance and Code.

3.3.1 Compliance. Prior to approval of the first article, if one is submitted, or prior to commencing production, the supplier shall submit to the contracting officer or his authorized representative satisfactory evidence that the containers and inserts he proposes to furnish under this specification meet the applicable requirements of NSF or the Public Health Service as follows:

3.3.1.1 NSF. Acceptable evidence of meeting the requirements of NSF shall be:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" or display of the NSF seal on the finished container and inserts, or

(2) A certification for the container and inserts issued by NSF under their special one-time contract evaluation/certification service, or

(3) A certified test report acceptable to the medical department of the service for which the containers and inserts are being procured indicating that the containers and inserts have been tested and conform to NSF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

3.3.1.2 Public Health Service. Acceptable evidence of meeting the requirements of the Public Health Service shall be:

(1) Listing in the current edition or quarterly supplement of the "List of Accepted Equipment for Interstate Carrier Use", or

(2) A certificate or letter from the Public Health Service indicating that the food container and inserts have been tested and found to conform to the applicable requirements of the US Public Health Service Food Service Sanitation Ordinance and Code as found in the Food Service Sanitation Manual No. 934.

3.4 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for food containers provided the completed item complies with all the provisions of this specification.

3.4.1 Stainless steel plate, sheet and strip. Stainless steel plate, sheet and strip shall conform to types 302 or 304 of ASTM A167.

3.5 Design and construction. The food container shall consist basically of an inner and outer shell welded to form the body; and, a locking, double-walled vented cover. The container shall be furnished with four food inserts. When specified (see 6.2), food inserts without covers or food insert covers may be procured separately. The design of container and inserts shall be similar to the design illustrated in figures 1 and 2. Figures 1 and 2 are for illustration and are not intended to preclude the procurement of food containers with inserts which otherwise meet the requirements of this specification. Unless otherwise specified herein, a seamless welded construction shall be used throughout.

3.5.1 Container.

3.5.1.1 Capacity and weight. The container, without the inserts, shall have a liquid capacity of not less than 11 gallons and shall weigh not more than 35 pounds.

3.5.1.2 Dimensions. The maximum body diameter and container height shall be as shown on figure 1. The minimum steel thickness for each part shall be as shown in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

TABLE I. Minimum thickness of stainless steel parts

Part	Minimum thickness (inches)
Inner shell - except bottom	0.026
Inner shell - bottom	0.032
Outer shell	0.032
Neck ring	0.045
Bottom band	0.120
Cover - top	0.045
Cover - bottom	0.032

3.5.1.3 Outer shell. The sidewalls of the outer shell shall be reinforced with not less than seven (7) continuous horizontal strengthening ribs. Each rib shall have a width not less than 7/16 inch nor more than 7/8 inch, and shall completely encircle the outer shell. The ribs shall be spaced to afford the best practical protection for the outer shell. The bottom band shall be welded to the inside surface of the lower side edges of the outer shell to form the base of the container.

3.5.1.4 Neck ring. The inner and outer shells shall be joined at the top by a neck ring which shall seat the gasket specified in 3.5.1.7. Three lugs, equally spaced, shall be welded to the sides of the neck ring to engage cam locks on the cover.

3.5.1.5 Inner shell support. The inner shell shall be supported by non-metallic, non-heat-conducting material, formed, located and installed so that vertical or horizontal movement of the inner shell is prevented. The supporting means shall not become loose or displaced unless the container is severely damaged or destroyed.

3.5.1.6 Cover. The cover shall be of double-walled construction, designed to prevent the accumulation of moisture on its top. The cover shall be fitted with an air vent tube of the straight-through design having a smoothly machined or polished inside diameter of not less than 1/2 inch. The vent tube shall extend sufficiently above the cover to prevent contamination from surface drainage and shall be attached to the top and bottom of the cover in such a manner that moisture will not enter the wall chamber of the cover. That portion of the vent tube extending above the cover shall be provided with sanitary

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

threads, or an adapter having threads attached to the vent tube, to provide for the attachment of the vent cap. The vent cap may be made of molded nylon and shall have sanitary threads for attachment to the tube or tube adaptor. When closed, the vent cap shall make the container airtight and leakproof, and when partially opened, shall vent the container without uncovering the top of the vent tube. The cap shall be removable to permit cleaning the vent tube, and may be equipped with a replaceable gasket or washer to seal the vent tube. Suitable means shall be provided to connect the vent tube cap to the cover or container to prevent loss of the cap when removed from the vent tube. The cover shall be provided with cam lock assemblies as specified in 3.5.1.6.1. A suitable silver solder may be used in attaching or sealing the vent tube.

3.5.1.6.1 Cover locking device. Three (3) cam lock assemblies, equally spaced, shall be welded to the cover rim to engage corresponding lugs attached to the neck ring. When engaged in the locked position, the cam locks shall evenly compress the cover on the gasket on the neck ring to a tight, leakproof fit.

3.5.1.7 Gasket. A replaceable, molded, nonporous, non-toxic, one piece gasket shall be provided. The gasket shall seat on the neck ring of the container and provide a bearing surface for the cover.

3.5.1.8 Handles. The container shall be fitted with two drop type handles, each with a mounting bracket. The handles shall be attached diametrically opposite each other on the upper side of the outer shell.

3.5.1.9 Insulating chamber. The chamber between the inner and outer shells of the container shall be under a vacuum or filled with material insulation.

3.5.1.9.1 Vacuum insulation. The vacuum insulation shall be created by exhausting the air from the space between the inner and outer shells and then permanently sealing the chamber.

3.5.1.9.2 Material insulation. The material insulation shall be bonded to the outer surface of the inner shell and to the inner surface of the outer shell. The material shall be non-settling, non-shifting, non-hygroscopic, and shall not cause corrosion or be deleterious to the inner or outer shell.

3.5.2 Food inserts.

3.5.2.1 Capacity and weight. The food inserts shall be of equal capacity, each not less than two (2) gallons, and the entire assembly of four (4) inserts, including all parts, shall not exceed a total weight of 17-1/2 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

3.5.2.2 Dimensions. The maximum individual insert dimensions and overall nested height of the four inserts shall be as shown in figure 2. The finished inserts and lids shall be not less than 0.026-inch thick at any point.

3.5.2.3 Cover and bail. Each insert shall be furnished with a bail and a removable cover. The inserts shall be designed to permit stacking of one insert on the other to comprise a stable assembly which shall fit snugly in the food container under compression of the locked container cover.

3.6 Performance requirements.

3.6.1 Handle test. The handle assemblies shall withstand the test specified in 4.5.1 without failure or permanent deformation.

3.6.2 Durability test. The container shall be capable of withstanding the test specified in 4.5.2 without breakage or separation of any kind which may cause a leak or otherwise impair efficiency.

3.6.3 Buoyancy. The container shall be capable of withstanding the test specified in 4.5.3 without losing its buoyancy.

3.6.4 Thermal efficiency. The total loss of temperature of the contents of the container shall not exceed 60 F when tested as specified in 4.5.4.

3.7 Finish. The food container and food inserts shall be finished in accordance with NSF Standard No. 2, or the Public Health Service Food Service Sanitation Ordinance and Code.

3.8 Marking for identification. Each container shall be marked with the manufacture's name, model number, and capacities with and without food inserts. The identification plate shall be applied in accordance with MIL-STD-130.

3.9 Workmanship. The finished food containers and inserts shall be clean and free of dents, sharp edges, burrs, slivers, punctures and cracks. Fusion welds shall be clean, smooth, continuous, free of pits, flux and splatter, and shall blend with adjacent surfaces. Threaded fasteners shall be drawn tight.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required, the food container and inserts shall be examined as specified in 4.4.2.1, 4.4.2.2, and tested as specified in 4.5.1 through 4.5.4. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1 above, component and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 End item inspection. The inspection lot shall be all food containers and inserts offered for inspection at one time.

4.4.2.1 Visual examination. The food container and inserts shall be examined for the defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Minor
Standard product	Item not in accordance with manufacturer's standard commercial product except for changes necessary to comply with specification requirements	X	
Finish	Stained, discolored, not uniform		X
	Deep scratches or tool marks on the inner surface, clearly noticeable	X	
	Pitted, scratched, or tool marks on the exterior surfaces, clearly noticeable		X
	Dirt, smudge, grease, or foreign matter		X

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the currentversion before use.

TABLE II. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Design	Any characteristic or detail of construction not in accordance with specific requirements	X	
Construction and workmanship (general)	Any component not attached as specified	X	
	Crack, puncture, or dent affecting serviceability	X	
	Dent affecting appearance		X
	Sharp edges or burrs that may cause injury	X	
	Component missing, not size or type specified	X	
	Any part not joined or connected as specified	X	
Welding and soldering	Not as specified	X	
	Not fused; cracked or fractured	X	
	Excess flux or splatter not removed		X
	Excess material not ground smooth		X
Container body	Number of strengthening ribs on the outer shell less than specified	X	
	Bottom band missing or not attached to the outer shell as specified or does not form the foot or base of the container	X	
	Less than three lugs attached to the neck ring, or lugs not equally spaced	X	
	Gasket not properly seated	X	
Cover	Not double-walled construction	X	
	Cover top will accumulate moisture	X	
	Vent cap and tube not made as specified	X	
	Top and bottom of cover parts not joined by welding	X	
	Dimensions, details, and attachment of vent tube, tube adapter, or vent cap not as specified	X	

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Cover (cont'd)	Vent cap does not completely close or does not ventilate container when partially open	X	
	Suitable means not provided to connect vent tube cap to cover or container	X	
Locking devices	Not provided with 3 cam lock assemblies	X	
	Cam locks not welded or spaced as specified	X	
	Does not function properly to obtain a tight, leakproof fit between cover and container	X	
Gasket	Not replaceable, not formed as specified	X	
Handles	Missing, not type specified, or not welded in proper location as specified	X	
Food inserts	More or less than four	X	
	Not of equal size or capacity	X	
	Cover, bail, or bracket missing	X	
	Not capable of being stacked as specified	X	
Identification marking	Missing or incomplete		X
	Not legible, not specified type or size, nor not in proper location		X

4.4.2.2 Dimensional, weight, and capacity examination. Examination shall be made of the end item for defects in dimensions, weight, and capacity. Any deviation from specified requirements and tolerances shall constitute a defect. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the current version before use.

4.4.2.3 End item testing. When a first article is not required, the first produced food container shall be tested as specified in 4.5.1 through 4.5.4. Failure of this test shall be cause for rejection of the inspection lot. Sample food containers shall be tested as specified in 4.5.1 through 4.5.4. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units. Failure of a test shall be considered a defect.

4.4.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be as indicated in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

TABLE III. Examination of preparation for delivery

Examine	Defect
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Contents	Number per container is more or less than required.

4.4.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4.4 Certificate examination. Certificates of compliance, certified test reports, approval labels or listing marks for codes and standards, as applicable, that are submitted as proof of compliance with the specification requirements shall be examined and validated.

4.5 Tests. Food containers, without the food inserts, shall be tested in the following sequence.

4.5.1 Handle test. For compliance with 3.6.1, the food container shall be suspended by one handle, with a load of 200 pounds suspended from the other handle for at least 15 minutes. Failure of any weld, or permanent deformation or rupture of either handle or of the outer shell shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the currentversion before use.

4.5.2 Durability test. The food container shall be tested as follows for compliance with 3.6.2. The container shall be filled with water to rated capacity and tested in a machine which will permit the container to fall free through a trap door device from a height of not less than nineteen (19) inches. The container shall be placed in the identical position for each drop and shall be dropped a total of five (5) times as follows: The container shall be level for the first drop; thereafter, a three-inch cube of wood shall be placed under the bottom rim of the container to vary the angle of each fall. For each successive drop, the cube of wood shall be positioned under the bottom rim 90 degrees in a clockwise direction from the previous drop. No restraining or guidelines of any kind shall be used. Breakage or separation of any kind which may cause a leak or otherwise impair the efficiency of the container shall constitute failure of this test. Slight deformation or denting of the container which does not cause leakage or impair thermal efficiency shall not be cause for failure.

4.5.3 Buoyancy test. The food container shall be tested as follows for compliance with 3.6.3. The container shall be filled with water to rated capacity and submerged, by weighting, in a tank of water. After having been submerged for one hour, the weights shall be removed. Failure of the container to float shall constitute failure of this test.

4.5.4 Thermal efficiency test. The food container shall be tested as follows for compliance with 3.6.4. The container shall be tempered or preheated with water at a temperature of 204 F to 207 F for 5 minutes. The container shall then be emptied and refilled to rated capacity with water at 204 F to 207 F and the cover secured. A still atmospheric temperature of between 70 F and 76 F shall be maintained for the duration of the test. The loss of temperature of the water in the container shall be determined after a twelve-hour period. Noncompliance with 3.6.4 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Complete food container with inserts. The four inserts complete with covers shall be positioned within the food container. Cushioning shall be provided as necessary to prevent movement or damage while in transit. The cover shall then be secured to the food container by means provided.

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the currentversion before use.

5.1.1.2 Inserts, when procured separately. Four inserts, without covers, shall be packaged in the most compact manner in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Cushioning shall be provided as necessary to prevent movement or damage while in transit. Box closure shall be in accoreance with PPP-B-636.

5.1.1.3 Insert covers, when procured separately. Four insert covers shall be packaged in the most compact manner in a snug-fitting fiberboard box and cushioned as specified in 5.1.1.2.

5.1.2 Level C. Complete food containers, inserts, or insert covers shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Complete food container. Each complete food container, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with PPP-B-636.

5.2.1.2 Inserts, when procured separately. Eight inserts, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.1.1.

5.2.1.3 Insert covers, when procured separately. Thirty-two insert covers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.1.1.

5.2.2 Level B.

5.2.2.1 Complete food container. Each complete food container, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.2 Inserts, when procured separately. Eight inserts, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.2.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the currentversion before use.

5.2.2.3 Insert covers, when procured separately. Thirty-two insert covers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container as specified in 5.2.2.1.

5.2.2.4 Weather-resistant grade fiberboard shipping container. When specified (see 6.2) the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. Complete food containers, inserts, or insert covers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Food containers with food inserts covered by this specification are intended for use in transporting and maintaining the desired temperature of food prepared in cooking areas for serving at eating areas in installations, ships, or in the field.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.

a. Title, number, and date of this specification.
b. When a first article is required (see 3.1, 4.3 and 6.3).
c. Whether specific components only are required (see 3.5).
d. Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.4).

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the current version before use.

6.2.2 Contract data requirements. Any data items to be delivered under any contract for items covered by this specification should be specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.33. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Custodians:

Army - GL
Navy - SA

Review activities:

DGSC - GS
Army - MD

Preparing activity:

Army - GL

Project No. 7330-0464

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

DET. NO.	DESCRIPTION
1	BOTTOM BAND
2	OUTER BOTTOM
3	INNER BOTTOM
4	INNER SHELL SUPPORT
5	INNER SHELL
6	OUTER SHELL
7	CAM LOCK ASSEMBLY
8	GASKET
9	COVER TOP
10	NECK RING
11	COVER BOTTOM
12	AIR VENT TUBE
13	WING NUT VENT CAP
14	NAME PLATE
15	DROP HANDLE ASSEMBLY

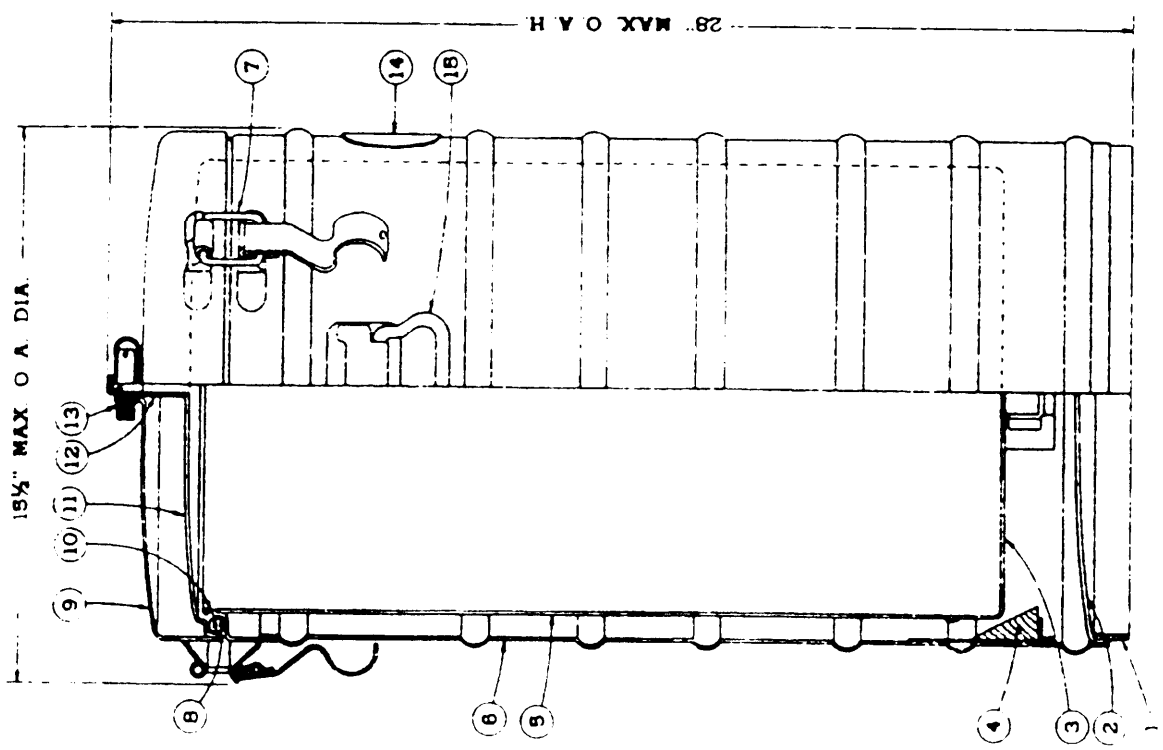


Figure – 1 FOOD CONTAINER, VACUUM, PORTABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

FOLD

DET. NO.	DESCRIPTION
1	FOOD PAN BODY
2	COVER KNOB
3	COVER
4	BAIL BRACKET
5	BAIL
6	RIVET
7	KNOB SCREW
8	CAP BUMPER (TOP PAN KNOB ONLY)

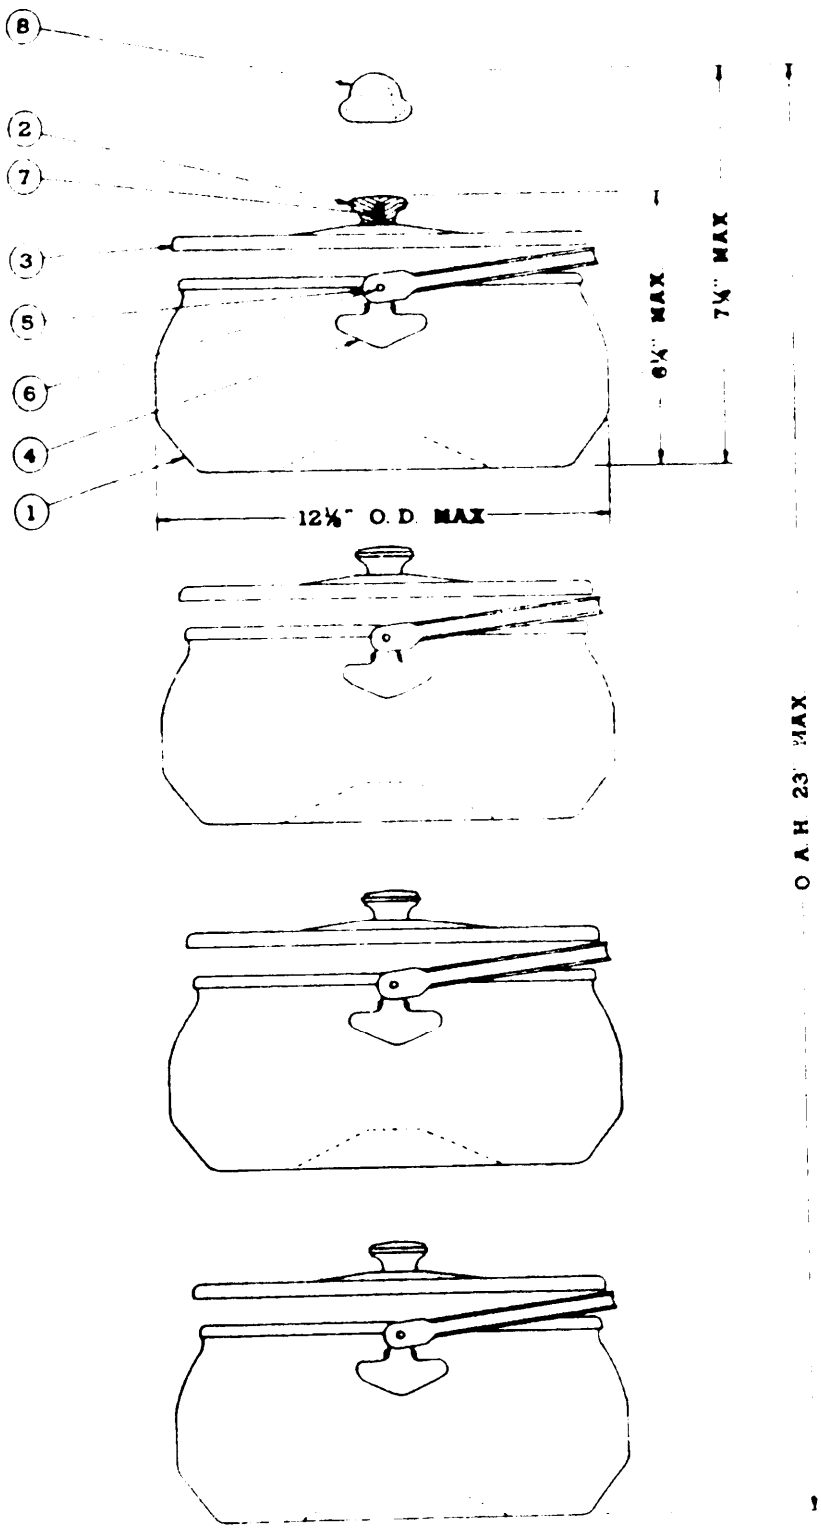


Figure-2 FOOD INSERTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R355

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-F-18421E FOOD CONTAINER: VACUUM OR IRRIGATE, WITH INSERT

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ( ) DIRECT GOVERNMENT CONTRACT ( ) SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATE PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ( ) YES ( ) NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:31Z
Check the source to verify that this is the current version before use.