
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC, (AXIAL-RADIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLE CYR17

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-23269.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

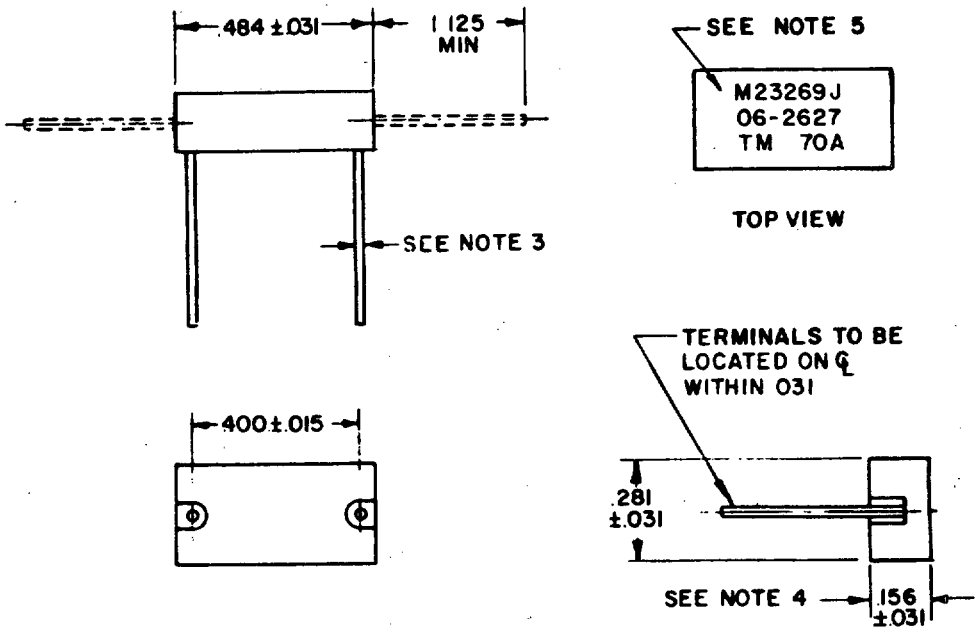

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.032	.81	.400	10.16
.004	.10	.062	1.57	.484	12.29
.015	.38	.156	3.96	1.125	28.58
.025	.64	.219	5.56		
.031	.79	.281	7.14		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The lead diameter shall be $.025 \substack{+.004 \\ -.001}$ for capacitance values less than 330 pF and $.032 \substack{+.004 \\ -.001}$ for capacitance values above 300 pF.
4. For any value above 300 pF, this dimension shall be $.219 \substack{+.062 \\ -.031}$.
5. See marking requirement.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure.
Case material - Glass (vitreous enamel).
Terminals - Type C of MIL-STD-1276.
Capacitance (Cap.) (nom) - See table I.
Cap. tolerance - See table I.
Rated voltage - See table I.
Failure rate level - L, M, P, R, or S.
Rated temperature - -55° to +125°C.
Temperature coefficient - 105 ±25 parts/million/°C.
Capacitance drift - 0.1% or 0.1 pF, whichever is greater.
Seal - Hermetic.

Seal: Test II.

Insulation resistance: 100,000 megohms or 200 ohm-farads min (qualification inspection only at +125°C). 500,000 megohms min (at +25°C).


Dissipation factor (DF): 0.1% max.

Thermal shock and moisture resistance:
DF - 0.1% max.

Q: 2,000 min.

Life:
ΔCap. (240 hr and 2,000 hr) - 1.0% max.
DF (240 hr and 2,000 hr) - 0.1% max.

Marking:

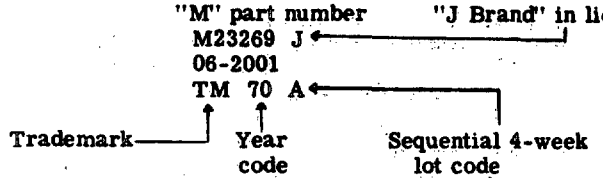

Substitutability data: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

Cap.	Rated voltage	Capacitance tolerance	Dash number M23269/06- FR level in %/1,000 hrs				
			L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
(pF)	(volts, dc)						
220	500	±1%	2001	3001	4001	5001	6001
220	↑	±2%	2002	3002	4002	5002	6002
220	↑	±5%	2003	3003	4003	5003	6003
240	↑	±1%	2004	3004	4004	5004	6004
240	↑	±2%	2005	3005	4005	5005	6005
240	↑	±5%	2006	3006	4006	5006	6006
270	↑	±1%	2007	3007	4007	5007	6007
270	↑	±2%	2008	3008	4008	5008	6008
270	↑	±5%	2009	3009	4009	5009	6009
300	↑	±1%	2010	3010	4010	5010	6010
300	↑	±2%	2011	3011	4011	5011	6011
300	↑	±5%	2012	3012	4012	5012	6012
330	↑	±1%	2013	3013	4013	5013	6013
330	↑	±2%	2014	3014	4014	5014	6014
330	↑	±5%	2015	3015	4015	5015	6015
360	↑	±1%	2016	3016	4016	5016	6016
360	↑	±2%	2017	3017	4017	5017	6017
360	↑	±5%	2018	3018	4018	5018	6018
390	↑	±1%	2019	3019	4019	5019	6019
390	↑	±2%	2020	3020	4020	5020	6020
390	↑	±5%	2021	3021	4021	5021	6021
430	↑	±1%	2022	3022	4022	5022	6022
430	↑	±2%	2023	3023	4023	5023	6023
430	↑	±5%	2024	3024	4024	5024	6024
470	↑	±1%	2025	3025	4025	5025	6025
470	↑	±2%	2026	3026	4026	5026	6026
470	500	±5%	2027	3027	4027	5027	6027
510	300	±1%	2028	3028	4028	5028	6028
510	↓	±2%	2029	3029	4029	5029	6029
510	↓	±5%	2030	3030	4030	5030	6030
560	↓	±1%	2031	3031	4031	5031	6031
560	↓	±2%	2032	3032	4032	5032	6032
560	↓	±5%	2033	3033	4033	5033	6033
620	↓	±1%	2034	3034	4034	5034	6034
620	↓	±2%	2035	3035	4035	5035	6035
620	↓	±5%	2036	3036	4036	5036	6036
680	↓	±1%	2037	3037	4037	5037	6037
680	↓	±2%	2038	3038	4038	5038	6038
680	↓	±5%	2039	3039	4039	5039	6039
750	↓	±1%	2040	3040	4040	5040	6040
750	↓	±2%	2041	3041	4041	5041	6041
750	↓	±5%	2042	3042	4042	5042	6042
820	↓	±1%	2043	3043	4043	5043	6043
820	↓	±2%	2044	3044	4044	5044	6044
820	↓	±5%	2045	3045	4045	5045	6045
910	↓	±1%	2046	3046	4046	5046	6046
910	↓	±2%	2047	3047	4047	5047	6047
910	↓	±5%	2048	3048	4048	5048	6048
1,000	↓	±1%	2049	3049	4049	5049	6049
1,000	↓	±2%	2050	3050	4050	5050	6050
1,000	300	±5%	2051	3051	4051	5051	6051

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

Superseded type designation in MIL-C-23269/6B	Use dash number M23269/06- in MIL-C-23269/6C FR level in %/1,000 hrs		Superseded type designation in MIL-C-23269/6B	Use dash number M23269/06- in MIL-C-23269/6C FR level in %/1,000 hrs	
	L (2.0)	M (1.0)		L (2.0)	M (1.0)
CYR17D221F	2001	3001	CYR17D471J	2027	3027
CYR17D221G	2002	3002	CYR17D511F	2028	3028
CYR17D221J	2003	3003	CYR17D511G	2029	3029
CYR17D241F	2004	3004	CYR17D511J	2030	3030
CYR17D241G	2005	3005	CYR17D561F	2031	3031
CYR17D241J	2006	3006	CYR17D561G	2032	3032
CYR17D271F	2007	3007	CYR17D561J	2033	3033
CYR17D271G	2008	3008	CYR17D621F	2034	3034
CYR17D271J	2009	3009	CYR17D621G	2035	3035
CYR17D301F	2010	3010	CYR17D621J	2036	3036
CYR17D301G	2011	3011	CYR17D681F	2037	3037
CYR17D301J	2012	3012	CYR17D681G	2038	3038
CYR17D331F	2013	3013	CYR17D681J	2039	3039
CYR17D331G	2014	3014	CYR17D751F	2040	3040
CYR17D331J	2015	3015	CYR17D751G	2041	3041
CYR17D361F	2016	3016	CYR17D751J	2042	3042
CYR17D361G	2017	3017	CYR17D821F	2043	3043
CYR17D361J	2018	3018	CYR17D821G	2044	3044
CYR17D391F	2019	3019	CYR17D821J	2045	3045
CYR17D391G	2020	3020	CYR17D911F	2046	3046
CYR17D391J	2021	3021	CYR17D911G	2047	3047
CYR17D431F	2022	3022	CYR17D911J	2048	3048
CYR17D431G	2023	3023	CYR17D102F	2049	3049
CYR17D431J	2024	3024	CYR17D102G	2050	3050
CYR17D471F	2025	3025	CYR17D102J	2051	3051
CYR17D471G	2026	3026			

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - EL
Navy -
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - None
Navy - MC, CG, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5910-1008-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use i submitting comments and suggestions for improvements. All users of military standardization documents are invited to provid suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, an mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAG
NECESSAR
IF MAILED
IN THE
UNITED STAT

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONICS SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 3111

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.