INCH-POUND
MIL-C-23269/6E
4 February 1993
SUPERSEDING
MIL-C-23269/6D
18 September 1989


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC, (AXIAL-RADIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLE CYR17

Inactive for design after 18 September 1989.
For new design use MIL-C-23269/1, /2, 3, /4, or /10.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-23269.

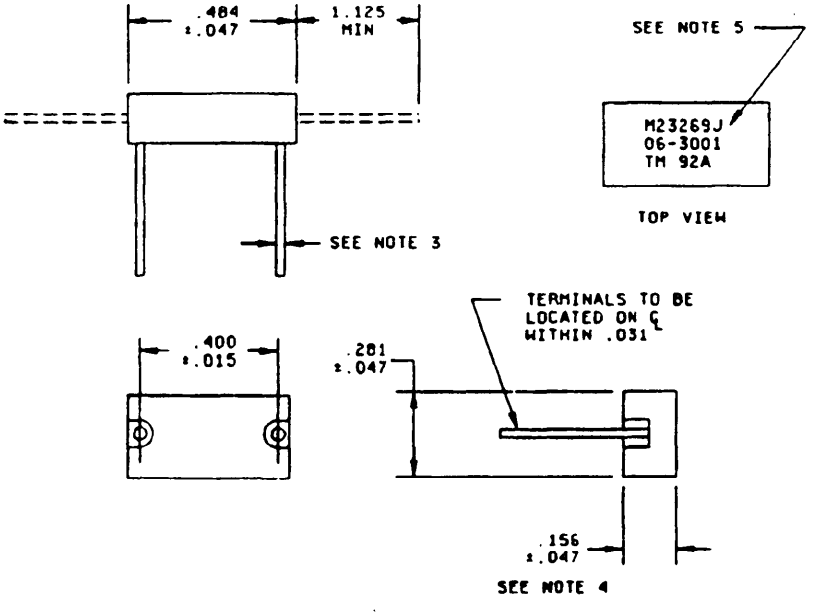

Inches	mm
.001	0.03
.004	0.10
.015	0.38
.025	0.64
.031	0.79
.032	0.81
.047	1.19
.062	1.57
.156	3.96
.219	5.56
.281	7.14
.400	10.16
.484	12.29
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The lead diameter shall be .025 +.004, -.001 for capacitance values less than 330 pF and .032 +.004, -.001 for capacitance values above 300 pF.
4. For any value above 300 pF, this dimension shall be .219 +.062, -.031.
5. See marking requirement.

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1.

Case material: Glass (vitreous enamel).

Terminals: Type C of MIL-STD-1276.

Capacitance (cap.) (nom): See table I.

Capacitance tolerance: See table I.

Rated voltage: See table I.

Failure rate level: M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 105 ±25 parts/million/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test II.

Insulation resistance: 100,000 megohms or 200 ohm-farads minimum (qualification inspection only at +125°C). 500,000 megohms minimum (at +25°C).

Dissipation factor (DF): 0.1 percent maximum.

Thermal shock and moisture resistance:

DF: 0.1 percent maximum.


Quality factor (Q): 2,000 minimum.

Life:

ΔCap. (240 hours and 2,000 hours): 1.0 percent maximum.

DF (240 hours and 2,000 hours): 0.1 percent maximum.

Marking:

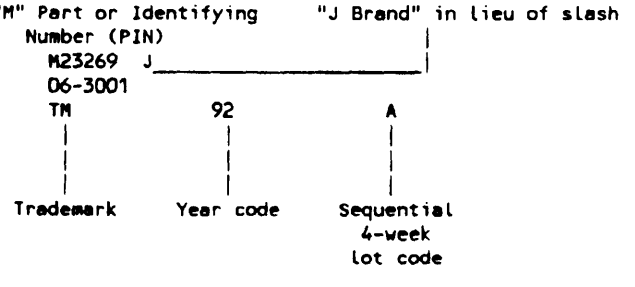

Substitutability data: See table II.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

Capacitance (pF)	Rated voltage (volts, dc)	Capacitance tolerance	Dash number M23269/06- FR level in percent/1,000 hours			
			M (1.0)	P (0.1)	R (0.01)	S (0.001)
220	500	±1%	3001	4001	5001	6001
220	"	±2%	3002	4002	5002	6002
220	"	±5%	3003	4003	5003	6003
240	"	±1%	3004	4004	5004	6004
240	"	±2%	3005	4005	5005	6005
240	"	±5%	3006	4006	5006	6006
270	"	±1%	3007	4007	5007	6007
270	"	±2%	3008	4008	5008	6008
270	"	±5%	3009	4009	5009	6009
300	"	±1%	3010	4010	5010	6010
300	"	±2%	3011	4011	5011	6011
300	"	±5%	3012	4012	5012	6012
330	"	±1%	3013	4013	5013	6013
330	"	±2%	3014	4014	5014	6014
330	"	±5%	3015	4015	5015	6015
360	"	±1%	3016	4016	5016	6016
360	"	±2%	3017	4017	5017	6017
360	"	±5%	3018	4018	5018	6018
390	"	±1%	3019	4019	5019	6019
390	"	±2%	3020	4020	5020	6020
390	"	±5%	3021	4021	5021	6021
430	"	±1%	3022	4022	5022	6022
430	"	±2%	3023	4023	5023	6023
430	"	±5%	3024	4024	5024	6024
470	"	±1%	3025	4025	5025	6025
470	"	±2%	3026	4026	5026	6026
470	"	±5%	3027	4027	5027	6027
510	300	±1%	3028	4028	5028	6028
510	"	±2%	3029	4029	5029	6029
510	"	±5%	3030	4030	5030	6030
560	"	±1%	3031	4031	5031	6031
560	"	±2%	3032	4032	5032	6032
560	"	±5%	3033	4033	5033	6033
620	"	±1%	3034	4034	5034	6034
620	"	±2%	3035	4035	5035	6035
620	"	±5%	3036	4036	5036	6036
680	"	±1%	3037	4037	5037	6037
680	"	±2%	3038	4038	5038	6038
680	"	±5%	3039	4039	5039	6039
750	"	±1%	3040	4040	5040	6040
750	"	±2%	3041	4041	5041	6041
750	"	±5%	3042	4042	5042	6042
820	"	±1%	3043	4043	5043	6043
820	"	±2%	3044	4044	5044	6044
820	"	±5%	3045	4045	5045	6045
910	"	±1%	3046	4046	5046	6046
910	"	±2%	3047	4047	5047	6047
910	"	±5%	3048	4048	5048	6048
1,000	"	±1%	3049	4049	5049	6049
1,000	"	±2%	3050	4050	5050	6050
1,000	"	±5%	3051	4051	5051	6051

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

Superseded type designation in MIL-C-23269/6B	Use dash number M23269/06- in MIL-C-23269/6C thru /6E FR level in %/1,000 hours		Superseded type designation in MIL-C-23269/6B	Use dash number M23269/06- in MIL-C-23269/6C thru /6E FR level in %/1,000 hours	
	L (2.0)	M (1.0)		L (2.0)	M (1.0)
CYR17D221F	2001	3001	CYR17D471J	2027	3027
CYR17D221G	2002	3002	CYR17D511F	2028	3028
CYR17D221J	2003	3003	CYR17D511G	2029	3029
CYR17D241F	2004	3004	CYR17D511J	2030	3030
CYR17D241G	2005	3005	CYR17D561F	2031	3031
CYR17D241J	2006	3006	CYR17D561G	2032	3032
CYR17D271F	2007	3007	CYR17D561J	2033	3033
CYR17D271G	2008	3008	CYR17D621F	2034	3034
CYR17D271J	2009	3009	CYR17D621G	2035	3035
CYR17D301F	2010	3010	CYR17D621J	2036	3036
CYR17D301G	2011	3011	CYR17D681F	2037	3037
CYR17D301J	2012	3012	CYR17D681G	2038	3038
CYR17D331F	2013	3013	CYR17D681J	2039	3039
CYR17D331G	2014	3014	CYR17D751F	2040	3040
CYR17D331J	2015	3015	CYR17D751G	2041	3041
CYR17D361F	2016	3016	CYR17D751J	2042	3042
CYR17D361G	2017	3017	CYR17D821F	2043	3043
CYR17D361J	2018	3018	CYR17D821G	2044	3044
CYR17D391F	2019	3019	CYR17D821J	2045	3045
CYR17D391G	2020	3020	CYR17D911F	2046	3046
CYR17D391J	2021	3021	CYR17D911G	2047	3047
CYR17D431F	2022	3022	CYR17D911J	2048	3048
CYR17D431G	2023	3023	CYR17D102F	2049	3049
CYR17D431J	2024	3024	CYR17D102G	2050	3050
CYR17D471F	2025	3025	CYR17D102J	2051	3051
CYR17D471G	2026	3026			

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Air Force - 17
DLA - ES

User activities:
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1828-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.