
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC, (AXIAL-RADIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLE CYR22

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-23269.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

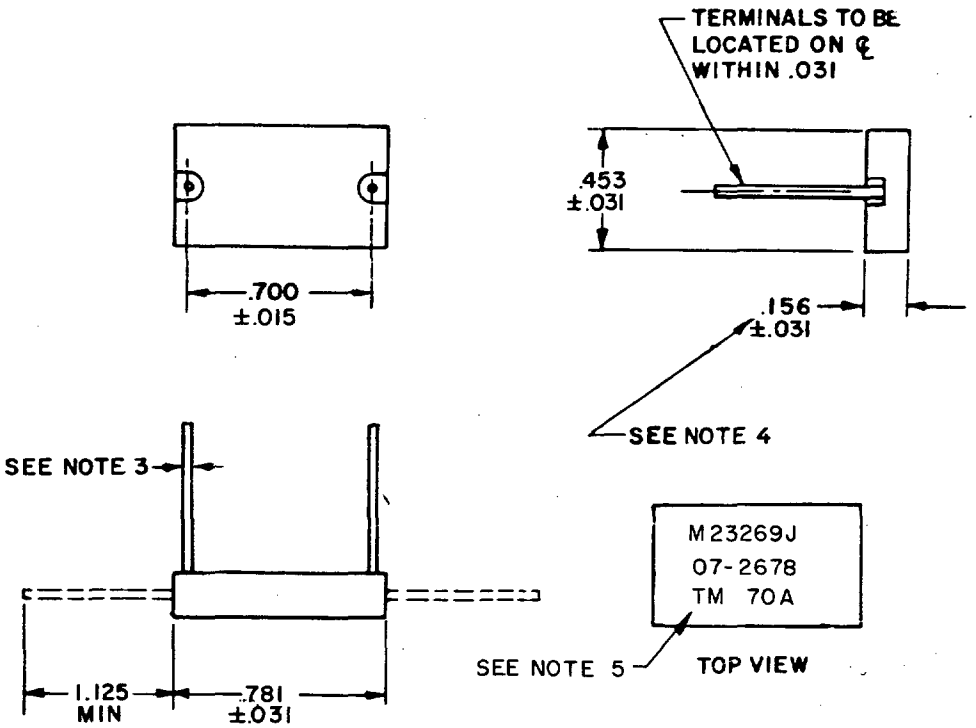

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.031	.79	.156	3.96	.700	17.78
.004	.10	.032	.81	.219	5.56	.781	19.84
.015	.38	.037	.94	.453	11.51	1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The lead diameter shall be $.032 \pm^{.004}_{.001}$ for capacitance values below 1800 pF, and $.037 \pm^{.004}_{.001}$ for capacitance values above 1600 pF.
4. For any value above 1600 pF this dimension shall be .219 ±.031.
5. See marking requirement.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure.
Case material - Glass (vitreous enamel).
Terminals - Type C of MIL-STD-1276.
Capacitance (Cap.) (nom) - See table I.
Cap. tolerance - See table I.
Rated voltage - See table I.
Failure rate level - L, M, P, R, or S.
Rated temperature - -55° to +125°C.
Temperature coefficient - 105 ±25 parts/million/°C.
Capacitance drift - 0.1% or 0.1 pF, whichever is greater.
Seal - Hermetic.

Seal: Test II.

Insulation resistance: 100,000 megohms or 200 ohm-farads min (qualification inspection only at +125°C). 500,000 megohms min (at +25°C).


Dissipation factor (DF); 0.1% max.

Thermal shock and moisture resistance:
DF - 0.1% max.

Q; 2,000 min.

Life:
ΔCap (240 hr and 2,000 hr) - 1.0% max.
DF (240 hr and 2,000 hr) - 0.1% max.

Marking:

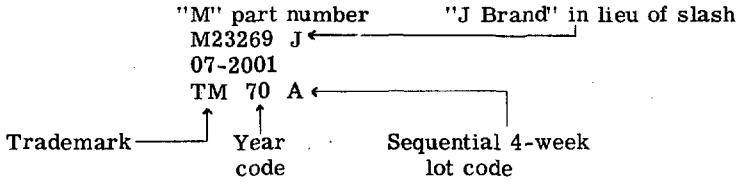

Substitutability data: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

Cap.	Rated voltage	Capacitance tolerance	Dash number M23269/07- FR level in %/1, 000 hrs				
			L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)
(pF)	(volts, dc)						
510	500	±1%	2001	3001	4001	5001	6001
510		±2%	2002	3002	4002	5002	6002
510		±5%	2003	3003	4003	5003	6003
560		±1%	2004	3004	4004	5004	6004
560		±2%	2005	3005	4005	5005	6005
560		±5%	2006	3006	4006	5006	6006
620		±1%	2007	3007	4007	5007	6007
620		±2%	2008	3008	4008	5008	6008
620		±5%	2009	3009	4009	5009	6009
680		±1%	2010	3010	4010	5010	6010
680		±2%	2011	3011	4011	5011	6011
680		±5%	2012	3012	4012	5012	6012
750		±1%	2013	3013	4013	5013	6013
750		±2%	2014	3014	4014	5014	6014
750		±5%	2015	3015	4015	5015	6015
820		±1%	2016	3016	4016	5016	6016
820		±2%	2017	3017	4017	5017	6017
820		±5%	2018	3018	4018	5018	6018
910		±1%	2019	3019	4019	5019	6019
910		±2%	2020	3020	4020	5020	6020
910		±5%	2021	3021	4021	5021	6021
1, 000		±1%	2022	3022	4022	5022	6022
1, 000		±2%	2023	3023	4023	5023	6023
1, 000	500	±5%	2024	3024	4024	5024	6024
1, 100	300	±1%	2025	3025	4025	5025	6025
1, 100		±2%	2026	3026	4026	5026	6026
1, 100		±5%	2027	3027	4027	5027	6027
1, 200		±1%	2028	3028	4028	5028	6028
1, 200		±2%	2029	3029	4029	5029	6029
1, 200		±5%	2030	3030	4030	5030	6030
1, 300		±1%	2031	3031	4031	5031	6031
1, 300		±2%	2032	3032	4032	5032	6032
1, 300		±5%	2033	3033	4033	5033	6033
1, 500		±1%	2034	3034	4034	5034	6034
1, 500		±2%	2035	3035	4035	5035	6035
1, 500		±5%	2036	3036	4036	5036	6036
1, 600		±1%	2037	3037	4037	5037	6037
1, 600		±2%	2038	3038	4038	5038	6038
1, 600		±5%	2039	3039	4039	5039	6039
1, 800		±1%	2040	3040	4040	5040	6040
1, 800		±2%	2041	3041	4041	5041	6041
1, 800		±5%	2042	3042	4042	5042	6042
2, 000		±1%	2043	3043	4043	5043	6043
2, 000		±2%	2044	3044	4044	5044	6044
2, 000		±5%	2045	3045	4045	5045	6045
2, 200		±1%	2046	3046	4046	5046	6046
2, 200		±2%	2047	3047	4047	5047	6047
2, 200		±5%	2048	3048	4048	5048	6048
2, 400		±1%	2049	3049	4049	5049	6049
2, 400		±2%	2050	3050	4050	5050	6050
2, 400	300	±5%	2051	3051	4051	5051	6051

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

Superseded type designation in MIL-C-23269/7B	Use dash number M23269/07- in MIL-C-23269/7C FR level in %/1, 000 hrs		Superseded type designation in MIL-C-23269/7B	Use dash number M23269/07- in MIL-C-23269/7C FR level in %/1, 000 hrs	
	L (2.0)	M (1.0)		L (2.0)	M (1.0)
CYR22D511F	2001	3001	CYR22D112J	2027	3027
CYR22D511G	2002	3002	CYR22D122F	2028	3028
CYR22D511J	2003	3003	CYR22D122G	2029	3029
CYR22D561F	2004	3004	CYR22D122J	2030	3030
CYR22D561G	2005	3005	CYR22D132F	2031	3031
CYR22D561J	2006	3006	CYR22D132G	2032	3032
CYR22D621F	2007	3007	CYR22D132J	2033	3033
CYR22D621G	2008	3008	CYR22D152F	2034	3034
CYR22D621J	2009	3009	CYR22D152G	2035	3035
CYR22D681F	2010	3010	CYR22D152J	2036	3036
CYR22D681G	2011	3011	CYR22D162F	2037	3037
CYR22D681J	2012	3012	CYR22D162G	2038	3038
CYR22D751F	2013	3013	CYR22D162J	2039	3039
CYR22D751G	2014	3014	CYR22D182F	2040	3040
CYR22D751J	2015	3015	CYR22D182G	2041	3041
CYR22D821F	2016	3016	CYR22D182J	2042	3042
CYR22D821G	2017	3017	CYR22D202F	2043	3043
CYR22D821J	2018	3018	CYR22D202G	2044	3044
CYR22D911F	2019	3019	CYR22D202J	2045	3045
CYR22D911G	2020	3020	CYR22D222F	2046	3046
CYR22D911J	2021	3021	CYR22D222G	2047	3047
CYR22D102F	2022	3022	CYR22D222J	2048	3048
CYR22D102G	2023	3023	CYR22D242F	2049	3049
CYR22D102J	2024	3024	CYR22D242G	2050	3050
CYR22D112F	2025	3025	CYR22D242J	2051	3051
CYR22D112G	2026	3026			

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - EL
Navy -
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - None
Navy - MC, CG, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5910-1008-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.