INCH-POUND
MIL-C-23269/7C
4 February 1993
SUPERSEDING
MIL-C-23269/7C
30 September 1970


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC,
(AXIAL-RADIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY,
STYLE CYR22

Inactive for design after date of this specification.
For new design use MIL-C-23269/1, /2, 3, /4, or /10.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation:
MIL-C-23269.

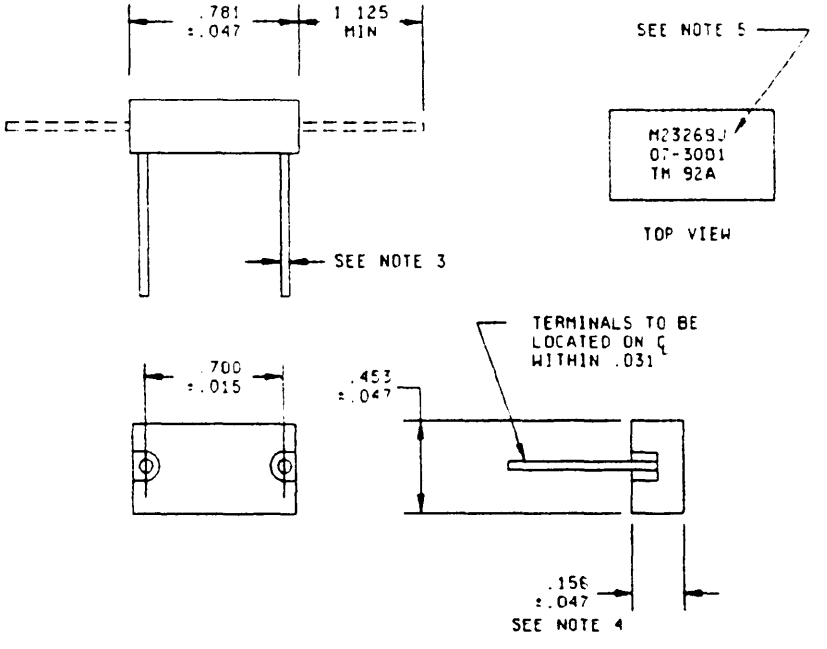

Inches	mm
.001	0.03
.004	0.10
.015	0.38
.031	0.79
.032	0.81
.037	0.94
.047	1.19
.156	3.96
.219	5.56
.453	11.51
.700	17.78
.781	19.84
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The lead diameter shall be .032 +.004, -.001 for capacitance values less than 1800 pf and .037 +.004, -.001 for capacitance values above 1600 pF.
4. For any value above 1600 pF, this dimension shall be .219 ±.047.
5. See marking requirement.

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figure 1.

Case material: Glass (vitreous enamel).

Terminals: Type C of MIL-STD-1276.

Capacitance (cap.) (nom): See table I.

Capacitance tolerance: See table I.

Rated voltage: See table I.

Failure rate level: M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 105 ±25 parts/million/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test II.

Insulation resistance: 100,000 megohms or 200 ohm-farads minimum (qualification inspection only at +125°C). 500,000 megohms minimum (at +25°C).

Dissipation factor (DF): 0.1 percent maximum.

Thermal shock and moisture resistance:

DF: 0.1 percent maximum.


Quality factor (Q): 2,000 minimum.

Life:

ΔCap. (240 hours and 2,000 hours): 1.0 percent maximum.

DF (240 hours and 2,000 hours): 0.1 percent maximum.

Marking:

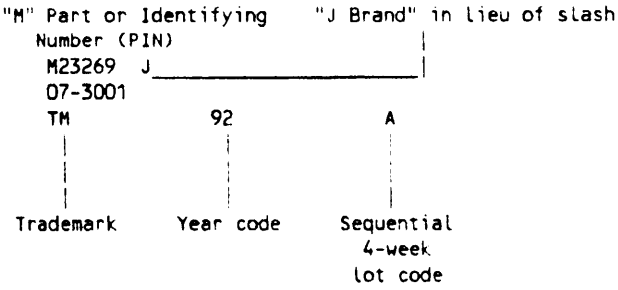

Substitutability data: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

(b) Class S: All MIL-STD-883 methods shall be observed

TABLE I. Electrical and physical characteristics and dash numbers.

Capacitance (pF)	Rated voltage (volts, dc)	Capacitance tolerance	Dash number M23269/07- FR level in percent/1,000 hours			
			M (1.0)	P (0.1)	R (0.01)	S (0.001)
510	500	±1%	3001	4001	5001	6001
510	"	±2%	3002	4002	5002	6002
510	"	±5%	3003	4003	5003	6003
560	"	±1%	3004	4004	5004	6004
560	"	±2%	3005	4005	5005	6005
560	"	±5%	3006	4006	5006	6006
620	"	±1%	3007	4007	5007	6007
620	"	±2%	3008	4008	5008	6008
620	"	±5%	3009	4009	5009	6009
680	"	±1%	3010	4010	5010	6010
680	"	±2%	3011	4011	5011	6011
680	"	±5%	3012	4012	5012	6012
750	"	±1%	3013	4013	5013	6013
750	"	±2%	3014	4014	5014	6014
750	"	±5%	3015	4015	5015	6015
820	"	±1%	3016	4016	5016	6016
820	"	±2%	3017	4017	5017	6017
820	"	±5%	3018	4018	5018	6018
910	"	±1%	3019	4019	5019	6019
910	"	±2%	3020	4020	5020	6020
910	"	±5%	3021	4021	5021	6021
1,000	"	±1%	3022	4022	5022	6022
1,000	"	±2%	3023	4023	5023	6023
1,000	"	±5%	3024	4024	5024	6024
1,100	300	±1%	3025	4025	5025	6025
1,100	"	±2%	3026	4026	5026	6026
1,100	"	±5%	3027	4027	5027	6027
1,200	"	±1%	3028	4028	5028	6028
1,200	"	±2%	3029	4029	5029	6029
1,200	"	±5%	3030	4030	5030	6030
1,300	"	±1%	3031	4031	5031	6031
1,300	"	±2%	3032	4032	5032	6032
1,300	"	±5%	3033	4033	5033	6033
1,500	"	±1%	3034	4034	5034	6034
1,500	"	±2%	3035	4035	5035	6035
1,500	"	±5%	3036	4036	5036	6036
1,600	"	±1%	3037	4037	5037	6037
1,600	"	±2%	3038	4038	5038	6038
1,600	"	±5%	3039	4039	5039	6039
1,800	"	±1%	3040	4040	5040	6040
1,800	"	±2%	3041	4041	5041	6041
1,800	"	±5%	3042	4042	5042	6042
2,000	"	±1%	3043	4043	5043	6043
2,000	"	±2%	3044	4044	5044	6044
2,000	"	±5%	3045	4045	5045	6045
2,200	"	±1%	3046	4046	5046	6046
2,200	"	±2%	3047	4047	5047	6047
2,200	"	±5%	3048	4048	5048	6048
2,400	"	±1%	3049	4049	5049	6049
2,400	"	±2%	3050	4050	5050	6050
2,400	"	±5%	3051	4051	5051	6051

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

Superseded type designation in MIL-C-23269/7B	Use dash number M23269/07- in MIL-C-23269/7C and /7D		Superseded type designation in MIL-C-23269/7B	Use dash number M23269/07- in MIL-C-23269/7C and /7D	
	FR level in %/1,000 hours			FR level in %/1,000 hours	
	L (2.0)	M (1.0)		L (2.0)	M (1.0)
CYR22D511F	2001	3001	CYR22D112J	2027	3027
CYR22D511G	2002	3002	CYR22D122F	2028	3028
CYR22D511J	2003	3003	CYR22D122G	2029	3029
CYR22D561F	2004	3004	CYR22D122J	2030	3030
CYR22D561G	2005	3005	CYR22D132F	2031	3031
CYR22D561J	2006	3006	CYR22D132G	2032	3032
CYR22D621F	2007	3007	CYR22D132J	2033	3033
CYR22D621G	2008	3008	CYR22D152F	2034	3034
CYR22D621J	2009	3009	CYR22D152G	2035	3035
CYR22D681F	2010	3010	CYR22D152J	2036	3036
CYR22D681G	2011	3011	CYR22D162F	2037	3037
CYR22D681J	2012	3012	CYR22D162G	2038	3038
CYR22D751F	2013	3013	CYR22D162J	2039	3039
CYR22D751G	2014	3014	CYR22D182F	2040	3040
CYR22D751J	2015	3015	CYR22D182G	2041	3041
CYR22D821F	2016	3016	CYR22D182J	2042	3042
CYR22D821G	2017	3017	CYR22D202F	2043	3043
CYR22D821J	2018	3018	CYR22D202G	2044	3044
CYR22D911F	2019	3019	CYR22D202J	2045	3045
CYR22D911G	2020	3020	CYR22D222F	2046	3046
CYR22D911J	2021	3021	CYR22D222G	2047	3047
CYR22D102F	2022	3022	CYR22D222J	2048	3048
CYR22D102G	2023	3023	CYR22D242F	2049	3049
CYR22D102J	2024	3024	CYR22D242G	2050	3050
CYR22D112F	2025	3025	CYR22D242J	2051	3051
CYR22D112G	2026	3026			

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Air Force - 17
DLA - ES

User activities:
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1828-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.