

MILITARY SPECIFICATION SHEET

# CAPACITORS, FIXED, GLASS DIELECTRIC, (AXIAL-RADIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLE CYR32

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-23269.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

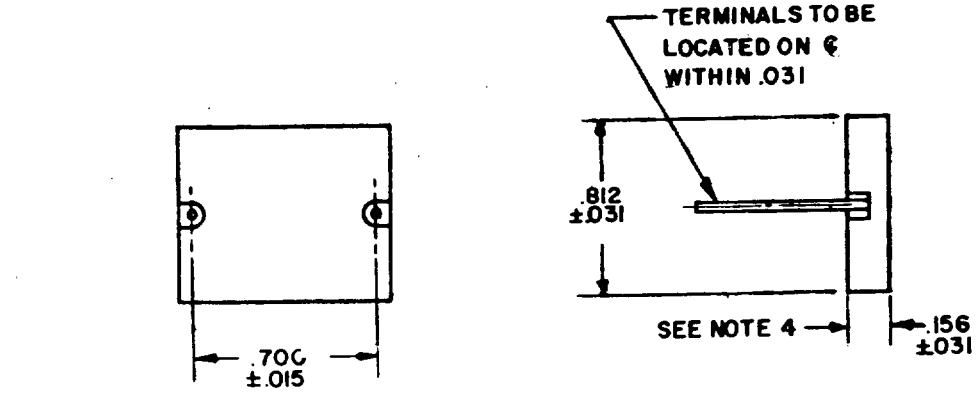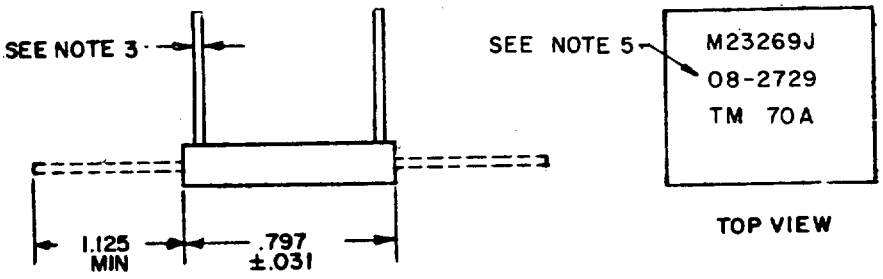


| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|
| .001 | .03 | .031 | .79 | .062 | 1.57 | .700 | 17.78 |
| .004 | .10 | .037 | .94 | .156 | 3.96 | .797 | 20.24 |
| .015 | .38 | .040 | 1.02 | .219 | 5.56 | .812 | 20.62 |
| | | | | | | 1.125 | 28.58 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The lead diameter shall be $.037 \pm .004$ / $.001$ for capacitance values below 2200 pF and $.040 \pm .004$ / $.001$ for capacitance values above 2000 pF.
4. For any value above 2000 pF, this dimension shall be $.219 \pm .062$ / $.031$.
5. See marking requirement.

FSC 5910



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure.
Case material - Glass (vitreous enamel).
Terminals - Type C of MIL-STD-1276.
Capacitance (Cap.) (nom) - See table I.
Cap. tolerance - See table I.
Rated voltage - See table I.
Failure rate level - L, M, P, R, or S.
Rated temperature - -55° to +125°C.
Temperature coefficient - 105 ±25 parts/million/°C.
Capacitance drift - 0.1% or 0.1 pF, whichever is greater.
Seal - Hermetic.

Seal: Test II.

Insulation resistance: 100,000 megohms or 200 ohm-farads min (qualification inspection only at +125°C). 500,000 megohms min (at +25°C).


Dissipation factor (DF): 0.1% max.

Thermal shock and moisture resistance:
DF - 0.1% max.

Q: 2,000 min.

Life:
ΔCap. (240 hr and 2,000 hr) - 1.0% max.
DF (240 hr and 2,000 hr) - 0.1% max.

Marking:

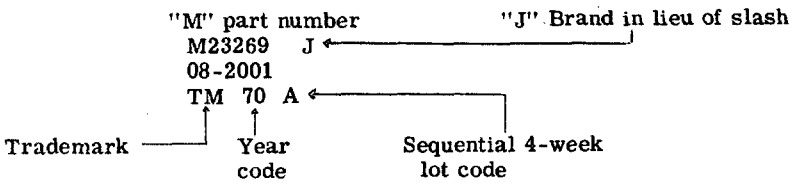


Substitutability data: See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

| Cap. | Rated voltage | Capacitance tolerance | Dash number M23269/08- FR level in %/1,000 hrs | | | | |
|---|---|---|---|---|---|---|---|
| | | | L (2.0) | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| (nF) | (volts, dc) | | | | | | |
| 1.1 | 500 | ±1% | 2001 | 3001 | 4001 | 5001 | 6001 |
| 1.1 | ↑ | ±2% | 2002 | 3002 | 4002 | 5002 | 6002 |
| 1.1 | ↑ | ±5% | 2003 | 3003 | 4003 | 5003 | 6003 |
| 1.2 | ↑ | ±1% | 2004 | 3004 | 4004 | 5004 | 6004 |
| 1.2 | ↑ | ±2% | 2005 | 3005 | 4005 | 5005 | 6005 |
| 1.2 | ↑ | ±5% | 2006 | 3006 | 4006 | 5006 | 6006 |
| 1.3 | ↑ | ±1% | 2007 | 3007 | 4007 | 5007 | 6007 |
| 1.3 | ↑ | ±2% | 2008 | 3008 | 4008 | 5008 | 6008 |
| 1.3 | ↑ | ±5% | 2009 | 3009 | 4009 | 5009 | 6009 |
| 1.5 | ↑ | ±1% | 2010 | 3010 | 4010 | 5010 | 6010 |
| 1.5 | ↑ | ±2% | 2011 | 3011 | 4011 | 5011 | 6011 |
| 1.5 | ↑ | ±5% | 2012 | 3012 | 4012 | 5012 | 6012 |
| 1.6 | ↑ | ±1% | 2013 | 3013 | 4013 | 5013 | 6013 |
| 1.6 | ↑ | ±2% | 2014 | 3014 | 4014 | 5014 | 6014 |
| 1.6 | ↑ | ±5% | 2015 | 3015 | 4015 | 5015 | 6015 |
| 1.8 | ↑ | ±1% | 2016 | 3016 | 4016 | 5016 | 6016 |
| 1.8 | ↑ | ±2% | 2017 | 3017 | 4017 | 5017 | 6017 |
| 1.8 | ↑ | ±5% | 2018 | 3018 | 4018 | 5018 | 6018 |
| 2.0 | ↑ | ±1% | 2019 | 3019 | 4019 | 5019 | 6019 |
| 2.0 | ↑ | ±2% | 2020 | 3020 | 4020 | 5020 | 6020 |
| 2.0 | ↑ | ±5% | 2021 | 3021 | 4021 | 5021 | 6021 |
| 2.2 | ↑ | ±1% | 2022 | 3022 | 4022 | 5022 | 6022 |
| 2.2 | ↑ | ±2% | 2023 | 3023 | 4023 | 5023 | 6023 |
| 2.2 | ↑ | ±5% | 2024 | 3024 | 4024 | 5024 | 6024 |
| 2.4 | ↑ | ±1% | 2025 | 3025 | 4025 | 5025 | 6025 |
| 2.4 | ↑ | ±2% | 2026 | 3026 | 4026 | 5026 | 6026 |
| 2.4 | ↑ | ±5% | 2027 | 3027 | 4027 | 5027 | 6027 |
| 2.7 | ↑ | ±1% | 2028 | 3028 | 4028 | 5028 | 6028 |
| 2.7 | ↑ | ±2% | 2029 | 3029 | 4029 | 5029 | 6029 |
| 2.7 | ↑ | ±5% | 2030 | 3030 | 4030 | 5030 | 6030 |
| 3.0 | ↑ | ±1% | 2031 | 3031 | 4031 | 5031 | 6031 |
| 3.0 | ↑ | ±2% | 2032 | 3032 | 4032 | 5032 | 6032 |
| 3.0 | ↑ | ±5% | 2033 | 3033 | 4033 | 5033 | 6033 |
| 3.3 | ↑ | ±1% | 2034 | 3034 | 4034 | 5034 | 6034 |
| 3.3 | ↑ | ±2% | 2035 | 3035 | 4035 | 5035 | 6035 |
| 3.3 | 500 | ±5% | 2036 | 3036 | 4036 | 5036 | 6036 |
| 3.6 | 300 | ±1% | 2037 | 3037 | 4037 | 5037 | 6037 |
| 3.6 | ↑ | ±2% | 2038 | 3038 | 4038 | 5038 | 6038 |
| 3.6 | ↑ | ±5% | 2039 | 3039 | 4039 | 5039 | 6039 |
| 3.9 | ↑ | ±1% | 2040 | 3040 | 4040 | 5040 | 6040 |
| 3.9 | ↑ | ±2% | 2041 | 3041 | 4041 | 5041 | 6041 |
| 3.9 | ↑ | ±5% | 2042 | 3042 | 4042 | 5042 | 6042 |
| 4.3 | ↑ | ±1% | 2043 | 3043 | 4043 | 5043 | 6043 |
| 4.3 | ↑ | ±2% | 2044 | 3044 | 4044 | 5044 | 6044 |
| 4.3 | ↑ | ±5% | 2045 | 3045 | 4045 | 5045 | 6045 |
| 4.7 | ↑ | ±1% | 2046 | 3046 | 4046 | 5046 | 6046 |
| 4.7 | ↑ | ±2% | 2047 | 3047 | 4047 | 5047 | 6047 |
| 4.7 | ↑ | ±5% | 2048 | 3048 | 4048 | 5048 | 6048 |
| 5.1 | ↑ | ±1% | 2049 | 3049 | 4049 | 5049 | 6049 |
| 5.1 | ↑ | ±2% | 2050 | 3050 | 4050 | 5050 | 6050 |
| 5.1 | ↑ | ±5% | 2051 | 3051 | 4051 | 5051 | 6051 |
| 5.6 | ↑ | ±1% | 2052 | 3052 | 4052 | 5052 | 6052 |
| 5.6 | ↑ | ±2% | 2053 | 3053 | 4053 | 5053 | 6053 |
| 5.6 | 300 | ±5% | 2054 | 3054 | 4054 | 5054 | 6054 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

| Superseded type designation in MIl-C-23269/8B | Use dash number M23269/08- in MIL-C-23269/8C FR level in %/1,000 hrs | | Superseded type designation in MIL-C-23269/8B | Use dash number M23269/08- in MIL-C-23269/8C FR level in %/1,000 hrs | |
|---|---|---|---|---|---|
| | L (2.0) | M (1.0) | | L (2.0) | M (1.0) |
| CYR32D112F | 2001 | 3001 | CYR32D272F | 2028 | 3028 |
| CYR32D112G | 2002 | 3002 | CYR32D272G | 2029 | 3029 |
| CYR32D112J | 2003 | 3003 | CYR32D272J | 2030 | 3030 |
| CYR32D122F | 2004 | 3004 | CYR32D302F | 2031 | 3031 |
| CYR32D122G | 2005 | 3005 | CYR32D302G | 2032 | 3032 |
| CYR32D122J | 2006 | 3006 | CYR32D302J | 2033 | 3033 |
| CYR32D132F | 2007 | 3007 | CYR32D332F | 2034 | 3034 |
| CYR32D132G | 2008 | 3008 | CYR32D332G | 2035 | 3035 |
| CYR32L132J | 2009 | 3009 | CYR32D332J | 2036 | 3036 |
| CYR32D152F | 2010 | 3010 | CYR32D362F | 2037 | 3037 |
| CYR32D152G | 2011 | 3011 | CYR32D362G | 2038 | 3038 |
| CYR32D152J | 2012 | 3012 | CYR32D362J | 2039 | 3039 |
| CYR32D162F | 2013 | 3013 | CYR32D392F | 2040 | 3040 |
| CYR32D162G | 2014 | 3014 | CYR32D392G | 2041 | 3041 |
| CYR32D162J | 2015 | 3015 | CYR32D392J | 2042 | 3042 |
| CYR32D182F | 2016 | 3016 | CYR32D432F | 2043 | 3043 |
| CYR32D182G | 2017 | 3017 | CYR32D432G | 2044 | 3044 |
| CYR32D182J | 2018 | 3018 | CYR32D432J | 2045 | 3045 |
| CYR32D202F | 2019 | 3019 | CYR32D472F | 2046 | 3046 |
| CYR32D202G | 2020 | 3020 | CYR32D472G | 2047 | 3047 |
| CYR32D202J | 2021 | 3021 | CYR32D472J | 2048 | 3048 |
| CYR32D222F | 2022 | 3022 | CYR32D512F | 2049 | 3049 |
| CYR32D222G | 2023 | 3023 | CYR32D512G | 2050 | 3050 |
| CYR32D222J | 2024 | 3024 | CYR32D512J | 2051 | 3051 |
| CYR32D242F | 2025 | 3025 | CYR32D562F | 2052 | 3052 |
| CYR32D242G | 2026 | 3026 | CYR32D562G | 2053 | 3053 |
| CYR32D242J | 2027 | 3027 | CYR32D562J | 2054 | 3054 |

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - EL
Navy -
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - None
Navy - MC, CG, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5910-1008-8)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |
| | |

*(TO DETACH THIS FORM, CUT ALONG THIS LINE.)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command (ELEX 8111)
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.