MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC,
(AXIAL-RADIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY,
STYLE CYR32

This amendment forms a part of Military Specification Sheet MIL-C-23269/8C, dated 30 September 1970, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1


* Following title, insert:

"|FAILURE RATE LEVEL 'L' IS INACTIVE|
|FOR DESIGN AFTER 20 July 1983 .|"

FIGURE 1: Delete and substitute:

INCHES	MM
.001	.03
.004	.10
.015	.38
.031	.79
.037	.94
.040	1.02
.047	1.19
.062	1.57
.156	3.96
.219	5.56
.700	17.78
.797	20.24
.812	20.62
1.125	28.58

"

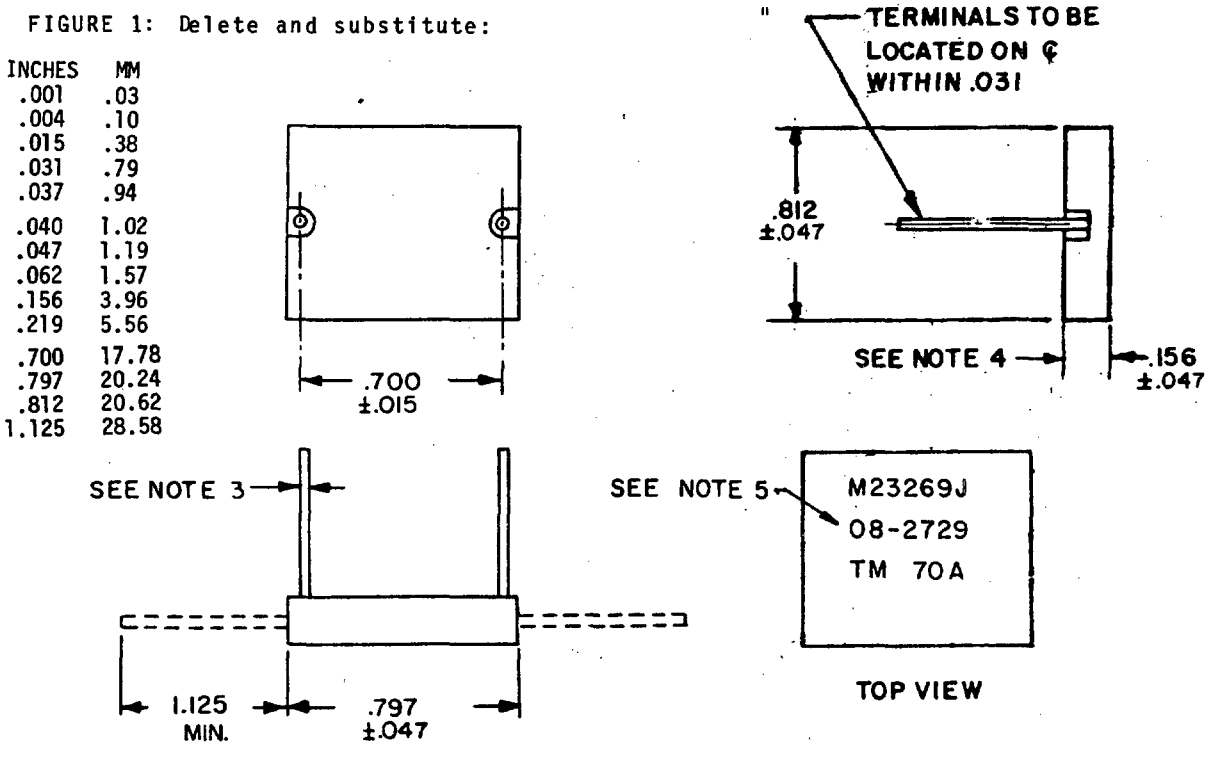

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. The lead diameter shall be .037 +.004, -.001 for capacitance values below 2200 pF and .040 +.004, -.001 for capacitance values above 2000 pF.
4. For any value above 2000 pF, this dimension shall be .219 +.062, -.031.
5. See marking requirement.

FIGURE 1. Dimensions and configurations. "

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

NOTE: The margin of this amendment is marked with an asterisk to indicate where the change (addition) from the previous amendment was made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 11
NASA - NA

Review activities:
Air Force - 17, 85
DLA - ES

User activities:
Navy - MC, CG, AS, OS, SH
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5910-1454-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.