INCH-POUND
MIL-C-23269/80
8 February 1993
SUPERSEDING
MIL-C-23269/80
30 September 1970


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC, (AXIAL-RADIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLE CYR52

Inactive for design after date of this specification. For new design use MIL-C-23269/1, /2, 3, /4, or /10.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-23269.

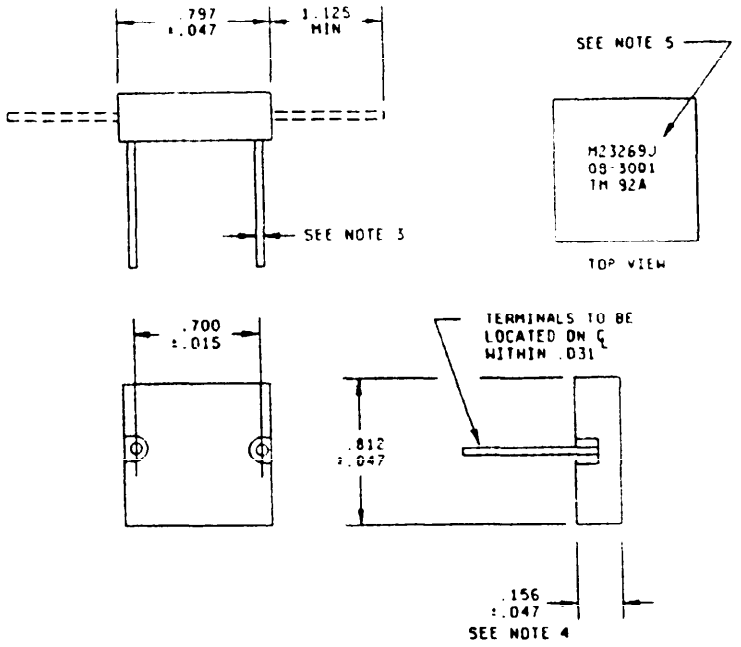

Inches	mm
.001	0.03
.004	0.10
.015	0.38
.031	0.79
.037	0.94
.040	1.02
.047	1.19
.062	1.57
.156	3.96
.219	5.56
.700	17.78
.797	20.24
.812	20.62
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The lead diameter shall be .037 +.004, -.001 for capacitance values less than 2200 pf and .040 +.004, -.001 for capacitance values above 2000 pF.
4. For any value above 2000 pF, this dimension shall be .219 +.062, - 031.
5. See marking requirement.

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction

Dimensions and configurations: See figure 1.

Case material: Glass (vitreous enamel)

Terminals: Type C of MIL-STD-1276.

Capacitance (cap.) (nom): See table I.

Capacitance tolerance: See table I.

Rated voltage: See table I.

Failure rate level: M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 105 ±25 parts/million/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test II.

Insulation resistance: 100,000 megohms or 200 ohm-farads minimum (qualification inspection only at +125°C). 500,000 megohms minimum (at +25°C).

Dissipation factor (DF): 0.1 percent maximum.

Thermal shock and moisture resistance:

DF: 0.1 percent maximum.


Quality factor (Q): 2,000 minimum.

Life:

ΔCap. (240 hours and 2,000 hours): 1.0 percent maximum.

DF (240 hours and 2,000 hours): 0.1 percent maximum.

Marking:

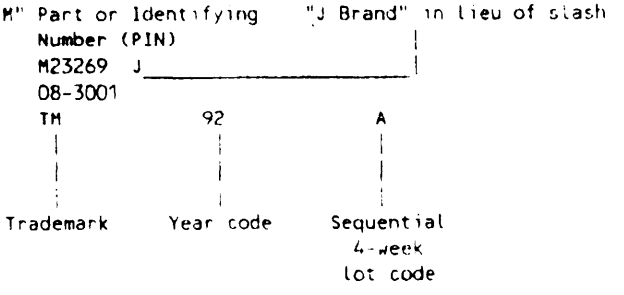

Substitutability data: See table II.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers

Capacitance (nF)	Rated voltage (volts, dc)	Capacitance tolerance	Dash number M23269/08- SP level in percent/1,000 hours			
			H (1.0)	P (0.1)	R (0.01)	S (0.001)
1.1	500	±1%	3001	4001	5001	6001
1.1	"	±2%	3002	4002	5002	6002
1.1	"	±5%	3003	4003	5003	6003
1.2	"	±1%	3004	4004	5004	6004
1.2	"	±2%	3005	4005	5005	6005
1.2	"	±5%	3006	4006	5006	6006
1.3	"	±1%	3007	4007	5007	6007
1.3	"	±2%	3008	4008	5008	6008
1.3	"	±5%	3009	4009	5009	6009
1.5	"	±1%	3010	4010	5010	6010
1.5	"	±2%	3011	4011	5011	6011
1.5	"	±5%	3012	4012	5012	6012
1.6	"	±1%	3013	4013	5013	6013
1.6	"	±2%	3014	4014	5014	6014
1.6	"	±5%	3015	4015	5015	6015
1.8	"	±1%	3016	4016	5016	6016
1.8	"	±2%	3017	4017	5017	6017
1.8	"	±5%	3018	4018	5018	6018
2.0	"	±1%	3019	4019	5019	6019
2.0	"	±2%	3020	4020	5020	6020
3.0	"	±5%	3021	4021	5021	6021
2.2	"	±1%	3022	4022	5022	6022
2.2	"	±2%	3023	4023	5023	6023
2.2	"	±5%	3024	4024	5024	6024
2.4	"	±1%	3025	4025	5025	6025
2.4	"	±2%	3026	4026	5026	6026
2.4	"	±5%	3027	4027	5027	6027
2.7	"	±1%	3028	4028	5028	6028
2.7	"	±2%	3029	4029	5029	6029
2.7	"	±5%	3030	4030	5030	6030
3.0	"	±1%	3031	4031	5031	6031
3.0	"	±2%	3032	4032	5032	6032
3.0	"	±5%	3033	4033	5033	6033
3.3	"	±1%	3034	4034	5034	6034
3.3	"	±2%	3035	4035	5035	6035
3.3	"	±5%	3036	4036	5036	6036
3.6	300	±1%	3037	4037	5037	6037
3.6	"	±2%	3038	4038	5038	6038
3.6	"	±5%	3039	4039	5039	6039
3.9	"	±1%	3040	4040	5040	6040
3.9	"	±2%	3041	4041	5041	6041
3.9	"	±5%	3042	4042	5042	6042
4.3	"	±1%	3043	4043	5043	6043
4.3	"	±2%	3044	4044	5044	6044
4.3	"	±5%	3045	4045	5045	6045
4.7	"	±1%	3046	4046	5046	6046
4.7	"	±2%	3047	4047	5047	6047
4.7	"	±5%	3048	4048	5048	6048
5.1	"	±1%	3049	4049	5049	6049
5.1	"	±2%	3050	4050	5050	6050
5.1	"	±5%	3051	4051	5051	6051
5.6	"	±1%	3052	4052	5052	6052
5.6	"	±2%	3053	4053	5053	6053
5.6	"	±5%	3054	4054	5054	6054

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data

Superseded type designation in MIL-C-23269/8B	Use dash number M23269/08- in MIL-C-23269/8C and /8D		Superseded type designation in MIL-C-23269/8B	Use dash number M23269/08- in MIL-C-23269/8C and /8D	
	ER level in 1,000 hours			ER level in 1,000 hours	
	L (2.0)	M (1.0)		L (2.0)	M (1.0)
CYR32D112F	2001	3001	CYR32D272J	2028	3028
CYR32D112G	2002	3002	CYR32D272F	2029	3029
CYR32D112J	2003	3003	CYR32D272G	2030	3030
CYR32D122F	2004	3004	CYR32D302J	2031	3031
CYR32D122G	2005	3005	CYR32D302F	2032	3032
CYR32D122J	2006	3006	CYR32D302G	2033	3033
CYR32D132F	2007	3007	CYR32D332J	2034	3034
CYR32D132G	2008	3008	CYR32D332F	2035	3035
CYR32D132J	2009	3009	CYR32D332G	2036	3036
CYR32D152F	2010	3010	CYR32D362J	2037	3037
CYR32D152G	2011	3011	CYR32D362F	2038	3038
CYR32D152J	2012	3012	CYR32D362G	2039	3039
CYR32D162F	2013	3013	CYR32D392J	2040	3040
CYR32D162G	2014	3014	CYR32D392F	2041	3041
CYR32D162J	2015	3015	CYR32D392G	2042	3042
CYR32D182F	2016	3016	CYR32D432J	2043	3043
CYR32D182G	2017	3017	CYR32D432F	2044	3044
CYR32D182J	2018	3018	CYR32D432G	2045	3045
CYR32D202F	2019	3019	CYR32D472J	2046	3046
CYR32D202G	2020	3020	CYR32D472F	2047	3047
CYR32D202J	2021	3021	CYR32D472G	2048	3048
CYR32D222F	2022	3022	CYR32D512J	2049	3049
CYR32D222G	2023	3023	CYR32D512F	2050	3050
CYR32D222J	2024	3024	CYR32D512G	2051	3051
CYR32D242F	2025	3025	CYR32D562F	2052	3052
CYR32D242G	2026	3026	CYR32D562G	2053	3053
CYR32D242J	2027	3027	CYR32D562J	2054	3054

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Air Force - 17
DLA - ES

User activities:
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1828-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:14Z
Check the source to verify that this is the current version before use.