INCH-POUND
MIL-C-23269/9C
4 February 1993
SUPERSEDING
MIL-C-23269/9B
18 September 1989


MILITARY SPECIFICATION SHEET

# CAPACITORS, FIXED, GLASS DIELECTRIC, (RADIAL OR AXIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLES CYR41, CYR42, AND CYR43

Inactive for design after 18 September 1989.
For new design use MIL-C-23269/1, /2, 3, /4, or /10.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-23269.

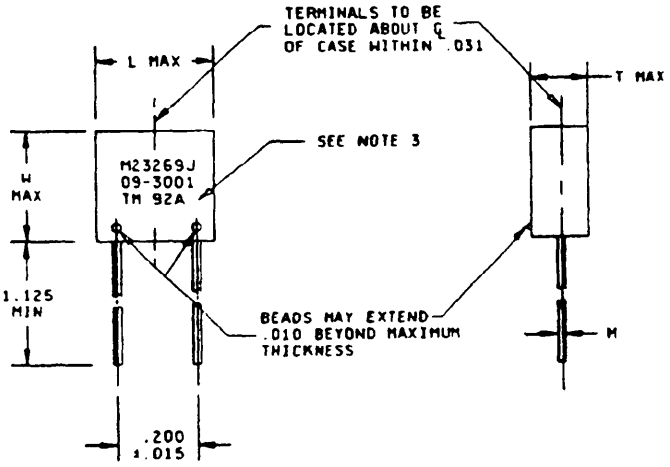


STYLE CYR41,SEE TABLE I

| Inches | mm | Inches | mm |
|---|---|---|---|
| .001 | 0.03 | .115 | 2.92 |
| .004 | 0.10 | .165 | 4.19 |
| .010 | 0.25 | .200 | 5.08 |
| .015 | 0.38 | .215 | 5.46 |
| .025 | 0.64 | .315 | 8.00 |
| .031 | 0.79 | 1.125 | 28.58 |

| Style | Dimensions | | | |
|---|---|---|---|---|
| | M | L max | W max | T max |
| CYR41 | .025 +.004 -.001 | .315 | .315 | .115 (0.5 through 470 pF)<br>.165 (560 and 680 pF)<br>.215 (820 and 1000 pF) |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 1. Dimensions and configuration for style CYR41.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1, 2, and 3 and tables I, II, and III.

Case material: Glass (vitreous enamel).

Terminals: Type C of MIL-STD-1276.

Capacitance (cap.) (nom): See tables I, II, and III.

Capacitance tolerance: See tables I, II, and III.

Rated voltage: See tables I, II, and III.

Failure rate level: M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 0 ±25 parts/million/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test II.

Insulation resistance: 100,000 megohms or 200 ohm-farads minimum (qualification inspection only at +125°C). 500,000 megohms minimum (at +25°C).

Dissipation factor (DF): 0.7 percent maximum (0.5 through 4.7 pF); 0.3 percent maximum (5.6 through 27 pF); and 0.1 percent maximum (30 pF and up).


Thermal shock and moisture resistance:

DF: Not to exceed initial requirement.

Quality factor (Q): In accordance with MIL-C-23269.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

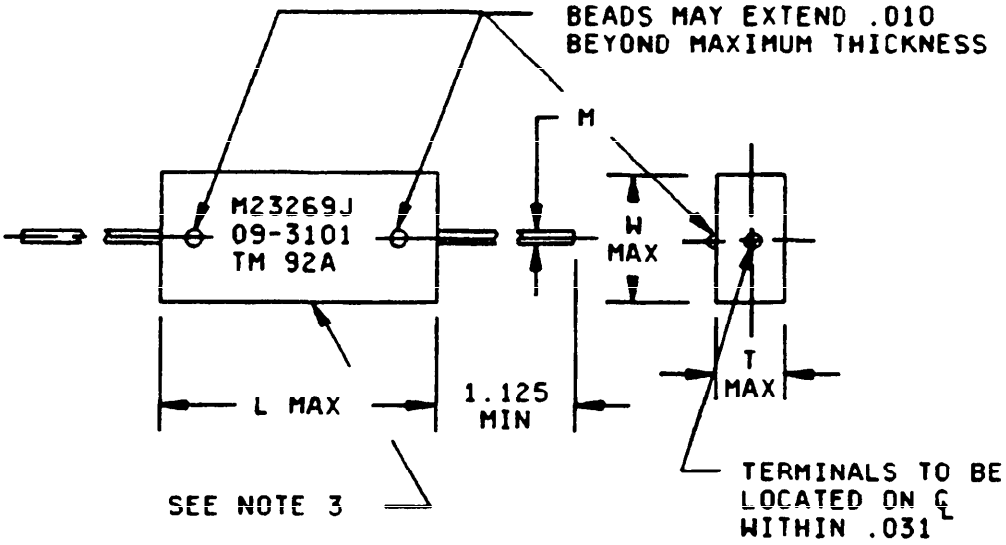


STYLE CYR42 SEE TABLE II

| Style | Dimensions | | | |
|---|---|---|---|---|
| | M | L max | W max | T max |
| CYR42 | .020 +.002 -.001 | .405 | .215 | .109 |


| Inches | mm | Inches | mm |
|---|---|---|---|
| .001 | 0.03 | .109 | 2.77 |
| .002 | 0.05 | .215 | 5.46 |
| .010 | 0.25 | .405 | 10.29 |
| .020 | 0.50 | 1.125 | 28.58 |
| .031 | 0.79 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 2. Dimensions and configuration for style CYR42.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

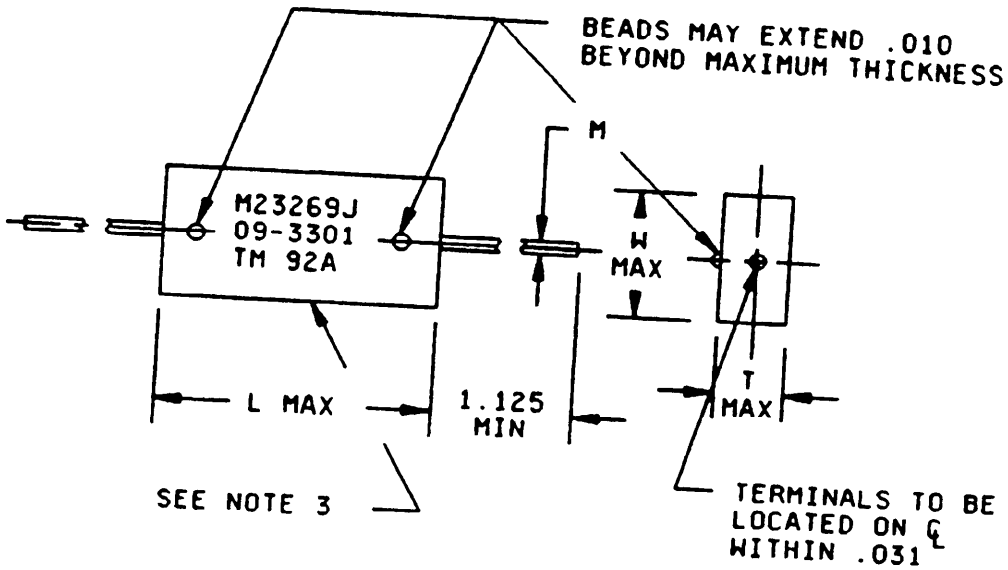


STYLE CYR43, SEE TABLE III

| Style | Dimensions | | | |
|---|---|---|---|---|
| | M | L max | W max | T max |
| CYR43 | .025 +.004 -.001 | .530 | .310 | .155 |

| Inches | mm | Inches | mm |
|---|---|---|---|
| .001 | 0.03 | .155 | 3.94 |
| .004 | 0.10 | .310 | 7.87 |
| .010 | 0.25 | .530 | 13.46 |
| .025 | 0.64 | 1.125 | 28.58 |
| .031 | 0.79 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 3. Dimensions and configuration for style CYR43.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers for style CYR41.

| Capacitance (pF) | Rated voltage (volts, dc) | Capacitance tolerance | Dash number M23269/09- FR level in percent/1,000 hours | | | |
|---|---|---|---|---|---|---|
| | | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 0.5 | 100 | ±0.25 pF | 3001 | 4001 | 5001 | 6001 |
| 1.0 | " | ±0.25 pF | 3002 | 4002 | 5002 | 6002 |
| 2.7 | " | ±0.25 pF | 3003 | 4003 | 5003 | 6003 |
| 3.3 | " | ±0.25 pF | 3004 | 4004 | 5004 | 6004 |
| 3.9 | " | ±0.25 pF | 3005 | 4005 | 5005 | 6005 |
| 4.7 | " | ±0.25 pF | 3006 | 4006 | 5006 | 6006 |
| 5.6 | " | ±0.25 pF | 3007 | 4007 | 5007 | 6007 |
| 6.8 | " | ±0.25 pF | 3008 | 4008 | 5008 | 6008 |
| 6.8 | " | ±5% | 3009 | 4009 | 5009 | 6009 |
| 8.2 | " | ±0.25 pF | 3010 | 4010 | 5010 | 6010 |
| 8.2 | " | ±5% | 3011 | 4011 | 5011 | 6011 |
| 10 | " | ±0.25 pF | 3012 | 4012 | 5012 | 6012 |
| 10 | " | ±5% | 3013 | 4013 | 5013 | 6013 |
| 12 | " | ±0.25 pF | 3014 | 4014 | 5014 | 6014 |
| 12 | " | ±5% | 3015 | 4015 | 5015 | 6015 |
| 15 | " | ±0.25 pF | 3016 | 4016 | 5016 | 6016 |
| 15 | " | ±2% | 3017 | 4017 | 5017 | 6017 |
| 15 | " | ±5% | 3018 | 4018 | 5018 | 6018 |
| 18 | " | ±0.25 pF | 3019 | 4019 | 5019 | 6019 |
| 18 | " | ±2% | 3020 | 4020 | 5020 | 6020 |
| 18 | " | ±5% | 3021 | 4021 | 5021 | 6021 |
| 22 | " | ±0.25 pF | 3022 | 4022 | 5022 | 6022 |
| 22 | " | ±2% | 3023 | 4023 | 5023 | 6023 |
| 22 | " | ±5% | 3024 | 4024 | 5024 | 6024 |
| 27 | " | ±1% | 3025 | 4025 | 5025 | 6025 |
| 27 | " | ±2% | 3026 | 4026 | 5026 | 6026 |
| 27 | " | ±5% | 3027 | 4027 | 5027 | 6027 |
| 33 | " | ±1% | 3028 | 4028 | 5028 | 6028 |
| 33 | " | ±2% | 3029 | 4029 | 5029 | 6029 |
| 33 | " | ±5% | 3030 | 4030 | 5030 | 6030 |
| 39 | " | ±1% | 3031 | 4031 | 5031 | 6031 |
| 39 | " | ±2% | 3032 | 4032 | 5032 | 6032 |
| 39 | " | ±5% | 3033 | 4033 | 5033 | 6033 |
| 47 | " | ±1% | 3034 | 4034 | 5034 | 6034 |
| 47 | " | ±2% | 3035 | 4035 | 5035 | 6035 |
| 47 | " | ±5% | 3036 | 4036 | 5036 | 6036 |
| 56 | " | ±1% | 3037 | 4037 | 5037 | 6037 |
| 56 | " | ±2% | 3038 | 4038 | 5038 | 6038 |
| 56 | " | ±5% | 3039 | 4039 | 5039 | 6039 |
| 68 | " | ±1% | 3040 | 4040 | 5040 | 6040 |
| 68 | " | ±2% | 3041 | 4041 | 5041 | 6041 |
| 68 | " | ±5% | 3042 | 4042 | 5042 | 6042 |
| 82 | " | ±1% | 3043 | 4043 | 5043 | 6043 |
| 82 | " | ±2% | 3044 | 4044 | 5044 | 6044 |
| 82 | " | ±5% | 3045 | 4045 | 5045 | 6045 |
| 100 | " | ±1% | 3046 | 4046 | 5046 | 6046 |
| 100 | " | ±2% | 3047 | 4047 | 5047 | 6047 |
| 100 | " | ±5% | 3048 | 4048 | 5048 | 6048 |
| 120 | " | ±1% | 3049 | 4049 | 5049 | 6049 |
| 120 | " | ±2% | 3050 | 4050 | 5050 | 6050 |
| 120 | " | ±5% | 3051 | 4051 | 5051 | 6051 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

TABLE I. Electrical and physical characteristics and dash numbers for style CYR41 - Continued.

| Capacitance (pF) | Rated voltage (volts, dc) | Capacitance tolerance | Dash number M23269/09- FR level in percent/1,000 hours | | | |
|---|---|---|---|---|---|---|
| | | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 150 | 100 | ±1% | 3052 | 4052 | 5052 | 6052 |
| 150 | " | ±2% | 3053 | 4053 | 5053 | 6053 |
| 150 | " | ±5% | 3054 | 4054 | 5054 | 6054 |
| 180 | " | ±1% | 3055 | 4055 | 5055 | 6055 |
| 180 | " | ±2% | 3056 | 4056 | 5056 | 6056 |
| 180 | " | ±5% | 3057 | 4057 | 5057 | 6057 |
| 220 | " | ±1% | 3058 | 4058 | 5058 | 6058 |
| 220 | " | ±2% | 3059 | 4059 | 5059 | 6059 |
| 220 | " | ±5% | 3060 | 4060 | 5060 | 6060 |
| 270 | " | ±1% | 3061 | 4061 | 5061 | 6061 |
| 270 | " | ±2% | 3062 | 4062 | 5062 | 6062 |
| 270 | " | ±5% | 3063 | 4063 | 5063 | 6063 |
| 330 | " | ±1% | 3064 | 4064 | 5064 | 6064 |
| 330 | " | ±2% | 3065 | 4065 | 5065 | 6065 |
| 330 | " | ±5% | 3066 | 4066 | 5066 | 6066 |
| 390 | " | ±1% | 3067 | 4067 | 5067 | 6067 |
| 390 | " | ±2% | 3068 | 4068 | 5068 | 6068 |
| 390 | " | ±5% | 3069 | 4069 | 5069 | 6069 |
| 470 | " | ±1% | 3070 | 4070 | 5070 | 6070 |
| 470 | " | ±2% | 3071 | 4071 | 5071 | 6071 |
| 470 | " | ±5% | 3072 | 4072 | 5072 | 6072 |
| 560 | " | ±1% | 3073 | 4073 | 5073 | 6073 |
| 560 | " | ±2% | 3074 | 4074 | 5074 | 6074 |
| 560 | " | ±5% | 3075 | 4075 | 5075 | 6075 |
| 680 | " | ±1% | 3076 | 4076 | 5076 | 6076 |
| 680 | " | ±2% | 3077 | 4077 | 5077 | 6077 |
| 680 | " | ±5% | 3078 | 4078 | 5078 | 6078 |
| 820 | " | ±1% | 3079 | 4079 | 5079 | 6079 |
| 820 | " | ±2% | 3080 | 4080 | 5080 | 6080 |
| 820 | " | ±5% | 3081 | 4081 | 5081 | 6081 |
| 1,000 | " | ±1% | 3082 | 4082 | 5082 | 6082 |
| 1,000 | " | ±2% | 3083 | 4083 | 5083 | 6083 |
| 1,000 | " | ±5% | 3084 | 4084 | 5084 | 6084 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical and physical characteristics and dash numbers for style CYR42.

| Capacitance (pF) | Rated voltage (volts, dc) | Capacitance tolerance | Dash number M23269/09- FR level in percent/1,000 hours | | | |
|---|---|---|---|---|---|---|
| | | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 0.5 | 500 | ±0.25 pF | 3101 | 4101 | 5101 | 6101 |
| 1.5 | " | ±0.25 pF | 3102 | 4102 | 5102 | 6102 |
| 2.7 | " | ±0.25 pF | 3103 | 4103 | 5103 | 6103 |
| 3.3 | " | ±0.25 pF | 3104 | 4104 | 5104 | 6104 |
| 3.9 | " | ±0.25 pF | 3105 | 4105 | 5105 | 6105 |
| 4.7 | " | ±0.25 pF | 3106 | 4106 | 5106 | 6106 |
| 5.6 | " | ±0.25 pF | 3107 | 4107 | 5107 | 6107 |
| 6.8 | " | ±0.25 pF | 3108 | 4108 | 5108 | 6108 |
| 6.8 | " | ±5% | 3109 | 4109 | 5109 | 6109 |
| 8.2 | " | ±0.25 pF | 3110 | 4110 | 5110 | 6110 |
| 8.2 | " | ±5% | 3111 | 4111 | 5111 | 6111 |
| 10 | " | ±0.25 pF | 3112 | 4112 | 5112 | 6112 |
| 10 | " | ±5% | 3113 | 4113 | 5113 | 6113 |
| 12 | " | ±0.25 pF | 3114 | 4114 | 5114 | 6114 |
| 12 | " | ±5% | 3115 | 4115 | 5115 | 6115 |
| 15 | " | ±0.25 pF | 3116 | 4116 | 5116 | 6116 |
| 15 | " | ±2% | 3117 | 4117 | 5117 | 6117 |
| 15 | " | ±5% | 3118 | 4118 | 5118 | 6118 |
| 18 | " | ±0.25 pF | 3119 | 4119 | 5119 | 6119 |
| 18 | " | ±2% | 3120 | 4120 | 5120 | 6120 |
| 18 | " | ±5% | 3121 | 4121 | 5121 | 6121 |
| 22 | " | ±0.25 pF | 3122 | 4122 | 5122 | 6122 |
| 22 | " | ±2% | 3123 | 4123 | 5123 | 6123 |
| 22 | " | ±5% | 3124 | 4124 | 5124 | 6124 |
| 27 | " | ±1% | 3125 | 4125 | 5125 | 6125 |
| 27 | " | ±2% | 3126 | 4126 | 5126 | 6126 |
| 27 | " | ±5% | 3127 | 4127 | 5127 | 6127 |
| 33 | " | ±1% | 3128 | 4128 | 5128 | 6128 |
| 33 | " | ±2% | 3129 | 4129 | 5129 | 6129 |
| 33 | " | ±5% | 3130 | 4130 | 5130 | 6130 |
| 39 | " | ±1% | 3131 | 4131 | 5131 | 6131 |
| 39 | " | ±2% | 3132 | 4132 | 5132 | 6132 |
| 39 | " | ±5% | 3133 | 4133 | 5133 | 6133 |
| 47 | " | ±1% | 3134 | 4134 | 5134 | 6134 |
| 47 | " | ±2% | 3135 | 4135 | 5135 | 6135 |
| 47 | " | ±5% | 3136 | 4136 | 5136 | 6136 |
| 56 | " | ±1% | 3137 | 4137 | 5137 | 6137 |
| 56 | " | ±2% | 3138 | 4138 | 5138 | 6138 |
| 56 | " | ±5% | 3139 | 4139 | 5139 | 6139 |
| 68 | 300 | ±1% | 3140 | 4140 | 5140 | 6140 |
| 68 | " | ±2% | 3141 | 4141 | 5141 | 6141 |
| 68 | " | ±5% | 3142 | 4142 | 5142 | 6142 |
| 82 | " | ±1% | 3143 | 4143 | 5143 | 6143 |
| 82 | " | ±2% | 3144 | 4144 | 5144 | 6144 |
| 82 | " | ±5% | 3145 | 4145 | 5145 | 6145 |
| 100 | 100 | ±1% | 3146 | 4146 | 5146 | 6146 |
| 100 | " | ±2% | 3147 | 4147 | 5147 | 6147 |
| 100 | " | ±5% | 3148 | 4148 | 5148 | 6148 |
| 120 | " | ±1% | 3149 | 4149 | 5149 | 6149 |
| 120 | " | ±2% | 3150 | 4150 | 5150 | 6160 |
| 120 | " | ±5% | 3151 | 4151 | 5151 | 6161 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical and physical characteristics and dash numbers for style CYR42 - Continued.

| Capacitance (pF) | Rated voltage (volts, dc) | Capacitance tolerance | Dash number M23269/09- FR level in percent/1,000 hours | | | |
|---|---|---|---|---|---|---|
| | | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 150 | 100 | ±1% | 3152 | 4152 | 5152 | 6152 |
| 150 | " | ±2% | 3153 | 4153 | 5153 | 6153 |
| 150 | " | ±5% | 3154 | 4154 | 5154 | 6154 |
| 180 | " | ±1% | 3155 | 4155 | 5155 | 6155 |
| 180 | " | ±2% | 3156 | 4156 | 5156 | 6156 |
| 180 | " | ±5% | 3157 | 4157 | 5157 | 6157 |
| 220 | " | ±1% | 3158 | 4158 | 5158 | 6158 |
| 220 | " | ±2% | 3159 | 4159 | 5159 | 6159 |
| 220 | " | ±5% | 3160 | 4160 | 5160 | 6160 |
| 270 | 50 | ±1% | 3161 | 4161 | 5161 | 6161 |
| 270 | " | ±2% | 3162 | 4162 | 5162 | 6162 |
| 270 | " | ±5% | 3163 | 4163 | 5163 | 6163 |
| 300 | " | ±1% | 3164 | 4164 | 5164 | 6164 |
| 300 | " | ±2% | 3165 | 4165 | 5165 | 6165 |
| 300 | " | ±5% | 3166 | 4166 | 5166 | 6166 |

TABLE III. Electrical and physical characteristics and dash numbers for style CYR43.

| Capacitance (pF) | Rated voltage (volts, dc) | Capacitance tolerance | Dash number M23269/09- FR level in percent/1,000 hours | | | |
|---|---|---|---|---|---|---|
| | | | M (1.0) | P (0.1) | R (0.01) | S(0.001) |
| 330 | 300 | ±1% | 3301 | 4301 | 5301 | 6301 |
| 330 | " | ±2% | 3302 | 4302 | 5302 | 6302 |
| 330 | " | ±5% | 3303 | 4303 | 5303 | 6303 |
| 390 | " | ±1% | 3304 | 4304 | 5304 | 6304 |
| 390 | " | ±2% | 3305 | 4305 | 5305 | 6305 |
| 390 | " | ±5% | 3306 | 4306 | 5306 | 6306 |
| 470 | 100 | ±1% | 3307 | 4307 | 5307 | 6307 |
| 470 | " | ±2% | 3308 | 4308 | 5308 | 6308 |
| 470 | " | ±5% | 3309 | 4309 | 5309 | 6309 |
| 560 | " | ±1% | 3310 | 4310 | 5310 | 6310 |
| 560 | " | ±2% | 3311 | 4311 | 5311 | 6311 |
| 560 | " | ±5% | 3312 | 4312 | 5312 | 6312 |
| 680 | " | ±1% | 3313 | 4313 | 5313 | 6313 |
| 680 | " | ±2% | 3314 | 4314 | 5314 | 6314 |
| 680 | " | ±5% | 3315 | 4315 | 5315 | 6315 |
| 820 | 50 | ±1% | 3316 | 4316 | 5316 | 6316 |
| 820 | " | ±2% | 3317 | 4317 | 5317 | 6317 |
| 820 | " | ±5% | 3318 | 4318 | 5318 | 6318 |
| 1,000 | " | ±1% | 3319 | 4319 | 5319 | 6319 |
| 1,000 | " | ±2% | 3320 | 4320 | 5320 | 6320 |
| 1,000 | " | ±5% | 3321 | 4321 | 5321 | 6321 |
| 1,200 | " | ±1% | 3322 | 4322 | 5322 | 6322 |
| 1,200 | " | ±2% | 3323 | 4323 | 5323 | 6323 |
| 1,200 | " | ±5% | 3324 | 4324 | 5324 | 6324 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

Life:

ΔCap. (240 hours and 2,000 hours): 1.0 percent or 0.5 pF, maximum.

DF (240 hours and 2,000 hours): Not to exceed initial requirement.

Marking:

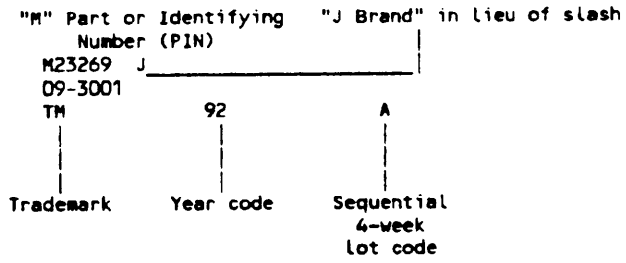


Substitutability data: See table IV.

| Style | Permissible +85°C voltage (volts, dc) | Rated +125°C voltage (volts, dc) | Capacitance (pF) |
|---|---|---|---|
| CYR41 | 200 | 100 | All values |
| CYR42 | 500 | 500 | 0.5 through 56 |
| | 500 | 300 | 68 and 82 |
| | 200 | 100 | 100 through 220 |
| | 100 | 50 | 270 and 300 |
| CYR43 | 500 | 300 | 330 and 390 |
| | 200 | 100 | 470 through 680 |
| | 100 | 50 | 820 through 1,200 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitutability data.

| Superseded type designation in MIL-C-23269/9 | Use dash number M23269/09- in MIL-C-23269/9A thru /9C | | Superseded type designation in MIL-C-23269/9 | Use dash number M23269/09- in MIL-C-23269/9A thru /9C | |
|---|---|---|---|---|---|
| | FR level in %/1,000 hours | | | FR level in %/1,000 hours | |
| | L (2.0) | M (1.0) | | L (2.0 ) | M (1.0) |
| CYR41E0R5C | 2001 | 3001 | CYR41E151F | 2052 | 3052 |
| CYR41E1R5C | 2002 | 3002 | CYR41E151G | 2053 | 3053 |
| CYR41E2R7C | 2003 | 3003 | CYR41E151J | 2054 | 3054 |
| CYR41E3R3C | 2004 | 3004 | CYR41E181F | 2055 | 3055 |
| CYR41E3R9C | 2005 | 3005 | CYR41E181G | 2056 | 3056 |
| CYR41E4R7C | 2006 | 3006 | CYR41E181J | 2057 | 3057 |
| CYR41E5R6C | 2007 | 3007 | CYR41E221F | 2058 | 3058 |
| CYR41E6R8C | 2008 | 3008 | CYR41E221G | 2059 | 3059 |
| CYR41E6R8J | 2009 | 3009 | CYR41E221J | 2060 | 3060 |
| CYR41E8R2C | 2010 | 3010 | CYR41E271F | 2061 | 3061 |
| CYR41E8R2J | 2011 | 3011 | CYR41E271G | 2062 | 3062 |
| CYR41E100C | 2012 | 3012 | CYR41E271J | 2063 | 3063 |
| CYR41E100J | 2013 | 3013 | CYR41E331F | 2064 | 3064 |
| CYR41E120C | 2014 | 3014 | CYR41E331G | 2065 | 3065 |
| CYR41E120J | 2015 | 3015 | CYR41E331J | 2066 | 3066 |
| CYR41E150C | 2016 | 3016 | CYR41E391F | 2067 | 3067 |
| CYR41E150G | 2017 | 3017 | CYR41E391G | 2068 | 3068 |
| CYR41E150J | 2018 | 3018 | CYR41E391J | 2069 | 3069 |
| CYR41E180C | 2019 | 3019 | CYR41E471F | 2070 | 3070 |
| CYR41E180G | 2020 | 3020 | CYR41E471G | 2071 | 3071 |
| CYR41E180J | 2021 | 3021 | CYR41E471J | 2072 | 3072 |
| CYR41E200C | 2022 | 3022 | CYR41E561F | 2073 | 3073 |
| CYR41E200G | 2023 | 3023 | CYR41E561G | 2074 | 3074 |
| CYR41E200J | 2024 | 3024 | CYR41E561J | 2075 | 3075 |
| CYR41E270F | 2025 | 3025 | CYR41E681F | 2076 | 3076 |
| CYR41E270G | 2026 | 3026 | CYR41E681G | 2077 | 3077 |
| CYR41E270J | 2027 | 3027 | CYR41E681J | 2078 | 3078 |
| CYR41E330F | 2028 | 3028 | CYR41E821F | 2079 | 3079 |
| CYR41E330G | 2029 | 3029 | CYR41E821G | 2080 | 3080 |
| CYR41E330J | 2030 | 3030 | CYR41E821J | 2081 | 3081 |
| CYR41E390F | 2031 | 3031 | CYR41E102F | 2082 | 3082 |
| CYR41E390G | 2032 | 3032 | CYR41E102G | 2083 | 3083 |
| CYR41E390J | 2033 | 3033 | CYR41E102J | 2084 | 3084 |
| CYR41E470F | 2034 | 3034 | CYR42E0R5C | 2101 | 3101 |
| CYR42E470G | 2035 | 3035 | CYR42E1R5C | 2102 | 3102 |
| CYR41E470J | 2036 | 3036 | CYR42E2R7C | 2103 | 3103 |
| CYR41E560F | 2037 | 3037 | CYR42E3R3C | 2104 | 3104 |
| CYR41E560G | 2038 | 3038 | CYR41E3R9C | 2105 | 3105 |
| CYR41E560J | 2039 | 3039 | CYR41E4R7C | 2106 | 3106 |
| CYR41E680F | 2040 | 3040 | CYR41E5R6C | 2107 | 3107 |
| CYR41E680G | 2041 | 3041 | CYR41E6R8C | 2108 | 3108 |
| CYR41E680J | 2042 | 3042 | CYR41E6R8J | 2109 | 3109 |
| CYR41E820F | 2043 | 3043 | CYR41E8R2C | 2110 | 3110 |
| CYR41E820G | 2044 | 3044 | CYR41E8R2J | 2111 | 3111 |
| CYR41E820J | 2045 | 3045 | CYR41E100C | 2112 | 3112 |
| CYR41E101F | 2046 | 3046 | CYR41E100J | 2113 | 3113 |
| CYR41E101G | 2047 | 3047 | CYR41E120C | 2114 | 3114 |
| CYR41E101J | 2048 | 3048 | CYR41E120J | 2115 | 3115 |
| CYR41E121F | 2049 | 3049 | CYR41E150C | 2116 | 3116 |
| CYR41E121G | 2050 | 3050 | CYR41E150J | 2117 | 3117 |
| CYR41E121J | 2051 | 3051 | CYR41E150J | 2118 | 3118 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitutability data - Continued.

| Superseded type designation in MIL-C-23269/9 | Use dash number M23269/09- in MIL-C-23269/09A thru/09C FR level in %/1,000 hours | | Superseded type designation in MIL-C-23269/9 | Use dash number M23269/09- in MIL-C-23269/09A thru /09C FR level in %/1,000 hours | |
|---|---|---|---|---|---|
| | L (2.0) | M (1.0) | | L (2.0 ) | M (1.0) |
| CYR41E180C | 2119 | 3119 | CYR42E181F | 2155 | 3155 |
| CYR21E180G | 2120 | 3120 | CYR42E181G | 2156 | 3156 |
| CYR42E180J | 2121 | 3121 | CYR42E181J | 2157 | 3157 |
| CYR42E220C | 2122 | 3122 | CYR42E221F | 2158 | 3158 |
| CYR42E220G | 2123 | 3123 | CYR42E221G | 2159 | 3159 |
| CYR42E220J | 2124 | 3124 | CYR42E221J | 2160 | 3160 |
| CYR42E270F | 2125 | 3125 | CYR42E271F | 2161 | 3161 |
| CYR42E270G | 2126 | 3126 | CYR42E271G | 2162 | 3162 |
| CYR42E270J | 2127 | 3127 | CYR42E271J | 2163 | 3163 |
| CYR42E330F | 2128 | 3128 | CYR42E301F | 2164 | 3164 |
| CYR42E330G | 2129 | 3129 | CYR42E301G | 2165 | 3165 |
| CYR42E330J | 2130 | 3130 | CYR42E301J | 2166 | 3166 |
| CYR42E390F | 2131 | 3131 | CYR43E331F | 2301 | 3301 |
| CYR42E390G | 2132 | 3132 | CYR43E331G | 2302 | 3302 |
| CYR42E390J | 2133 | 3133 | CYR43E331J | 2303 | 3303 |
| CYR42E470F | 2134 | 3134 | CYR43E391F | 2304 | 3304 |
| CYR42E470G | 2135 | 3135 | CYR43E391G | 2305 | 3305 |
| CYR42E470J | 2136 | 3136 | CYR43E391J | 2306 | 3306 |
| CYR42E560F | 2137 | 3137 | CYR43E471F | 2307 | 3307 |
| CYR42E560G | 2138 | 3138 | CYR43E471G | 2308 | 3308 |
| CYR42E560J | 2139 | 3139 | CYR43E471J | 2309 | 3309 |
| CYR42E680F | 2140 | 3140 | CYR43E561F | 2310 | 3310 |
| CYR42E680G | 2141 | 3141 | CYR43E561G | 2311 | 3311 |
| CYR42E680J | 2142 | 3142 | CYR43E561J | 2312 | 3312 |
| CYR42E820F | 2143 | 3143 | CYR43E681F | 2313 | 3313 |
| CYR42E820G | 2144 | 3144 | CYR43E681G | 2314 | 3314 |
| CYR42E820J | 2145 | 3145 | CYR43E681J | 2315 | 3315 |
| CYR42E101F | 2146 | 3146 | CYR43E821F | 2316 | 3316 |
| CYR42E101G | 2147 | 3147 | CYR43E821G | 2317 | 3317 |
| CYR42E101J | 2148 | 3148 | CYR43E821J | 2318 | 3318 |
| CYR42E121F | 2149 | 3149 | CYR43E102F | 2319 | 3319 |
| CYR42E121G | 2150 | 3150 | CYR43E102G | 2320 | 3320 |
| CYR42E121J | 2151 | 3151 | CYR43E102J | 2321 | 3321 |
| CYR42E151F | 2152 | 3152 | CYR43E122F | 2322 | 3322 |
| CYR42E151G | 2153 | 3153 | CYR43E122G | 2323 | 3323 |
| CYR42E151J | 2154 | 3154 | CYR43E122J | 2324 | 3324 |

Revision letters are not used to denote changes due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Air Force - 17
DLA - ES

User activities:
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1828-09)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.