MILITARY SPECIFICATION SHEET

INSULATORS, BUSHING
(STYLE 43)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

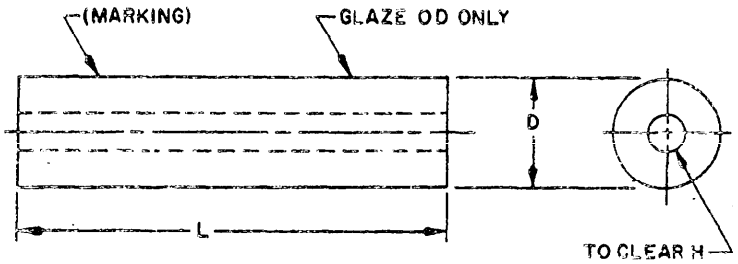


FIGURE 1. Style 43 bushing insulator.

TABLE I. Type designations.

Type designation	Dimensions 1/		
	D 2/	H	L 2/
NL422B43-004	.250 (6.35)	6-32UNC-2B	.500 (12.70)
NL422B43-008	.500 (12.70)	8-32UNC-2B	1.000 (25.40)
NL422B43-012	.500 (12.70)	10-32UNF-2B	1.500 (38.10)
NL422B43-016	.750 (19.05)	10-32UNF-2B	2.000 (50.80)

1/ All dimensions in inches.
2/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0186)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:08Z
Check the source to verify that this is the current version before use.