INCH-POUND

MIL-I-23264/19A
w/ AMENDMENT 1
18 July 2025
SUPERSEDING
MIL-I-23264/19A
8 July 1968

MILITARY SPECIFICATION SHEET

INSULATORS, BOWL (STYLE 58)

Inactive for new design after 19 November 1997


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this document and the latest issue of specification MIL-I-23264.

AMSC N/A FSC 5970

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

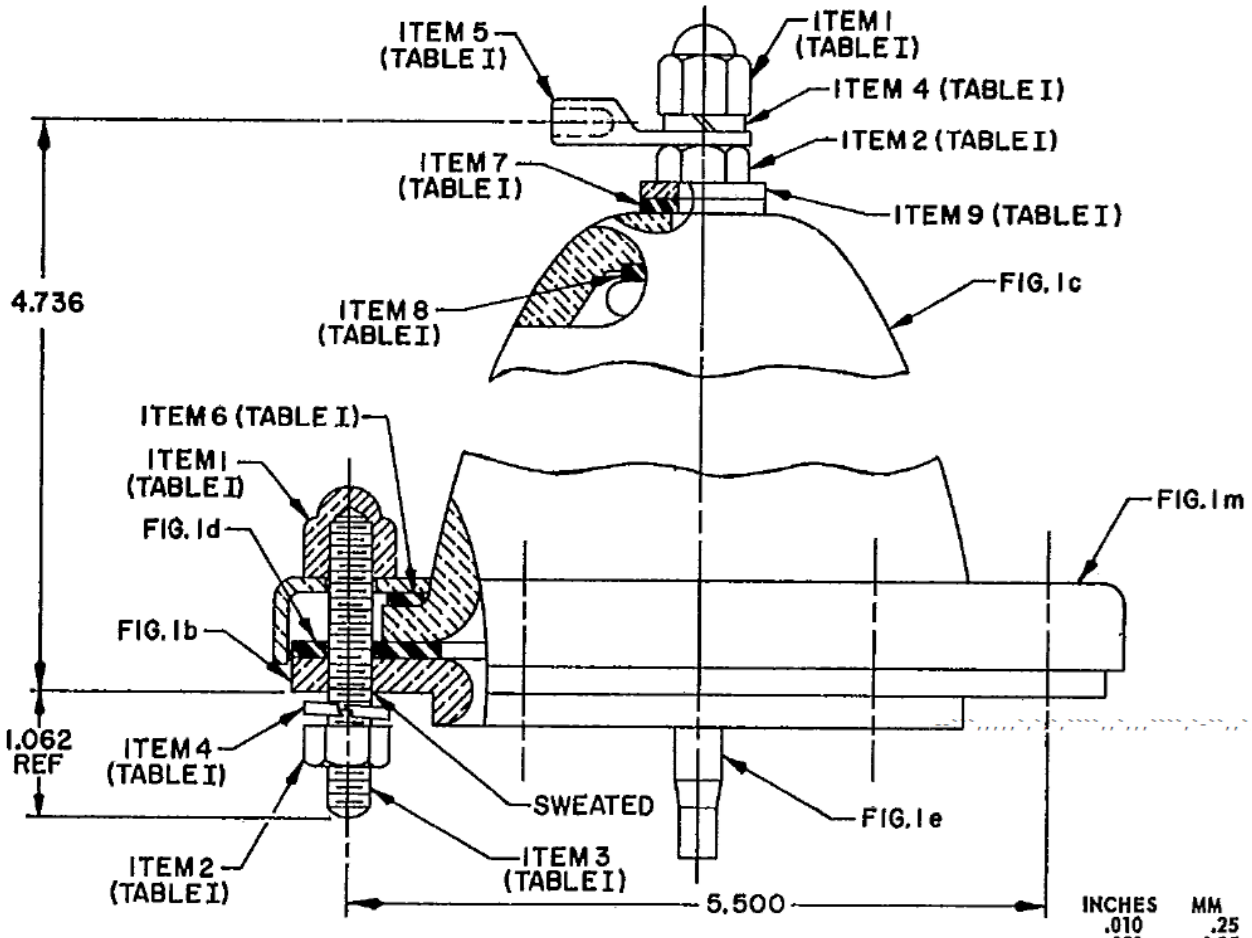

INCHES	MM
.010	.25
.250	6.35
1.062	26.97
3.750	95.25
4.250	107.95
4.736	120.29
5.500	139.70
6.562	166.67

FIGURE 1a. Bowl insulator assembly (NL422B58–055).

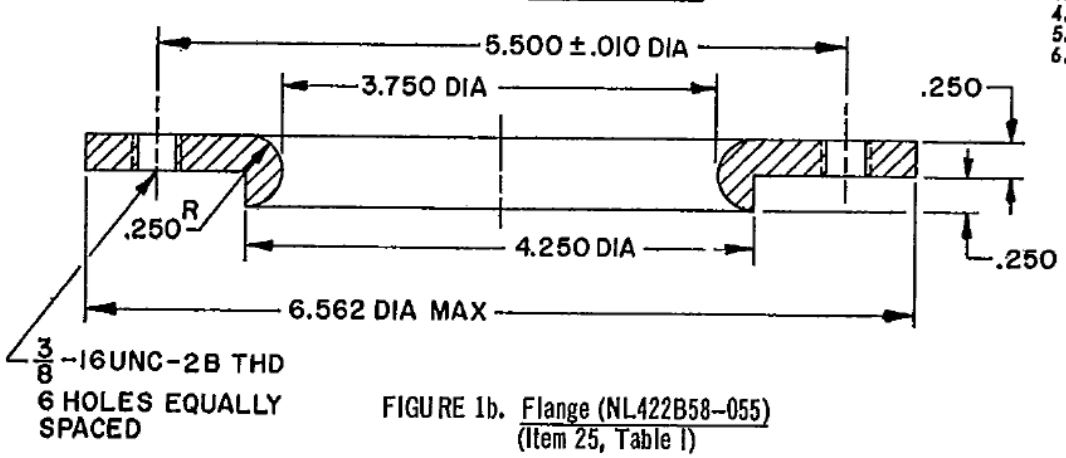


FIGURE 1b. Flange (NL422B58–055) (Item 25, Table I)

FIGURE 1. Style 58 bowl insulator

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

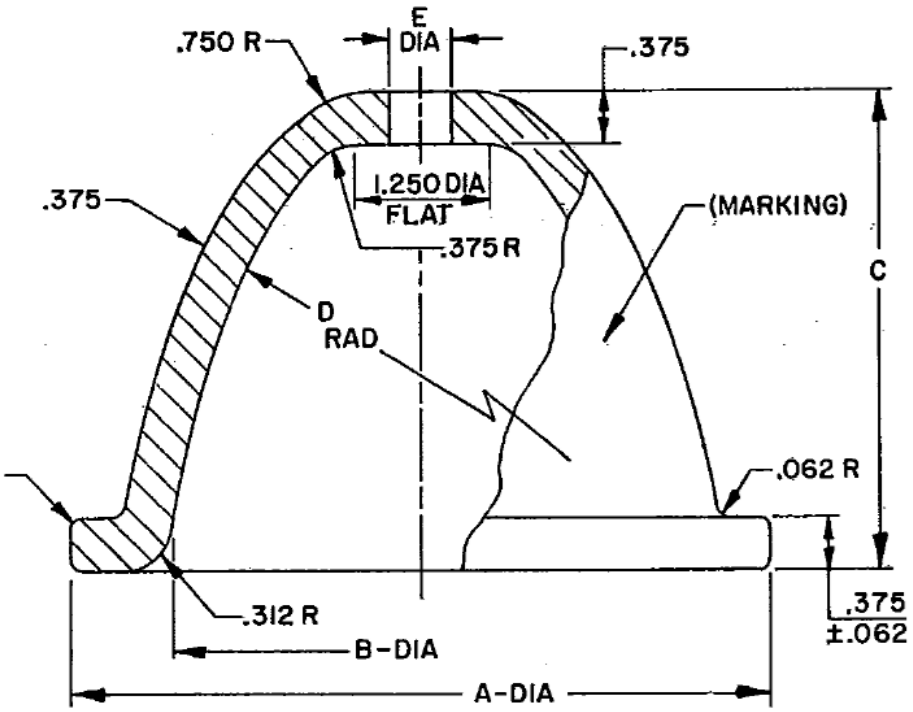


FIGURE 1c. Insulator (NL422B58–055 and NL422B58–074) (Item 27, Table I).

INCHES	MM
.062	1.57
.187	4.75
.312	7.92
.375	9.53
.406	10.31
.750	19.05
1.250	31.75
4.000	101.60
5.500	139.70
6.562	166.67


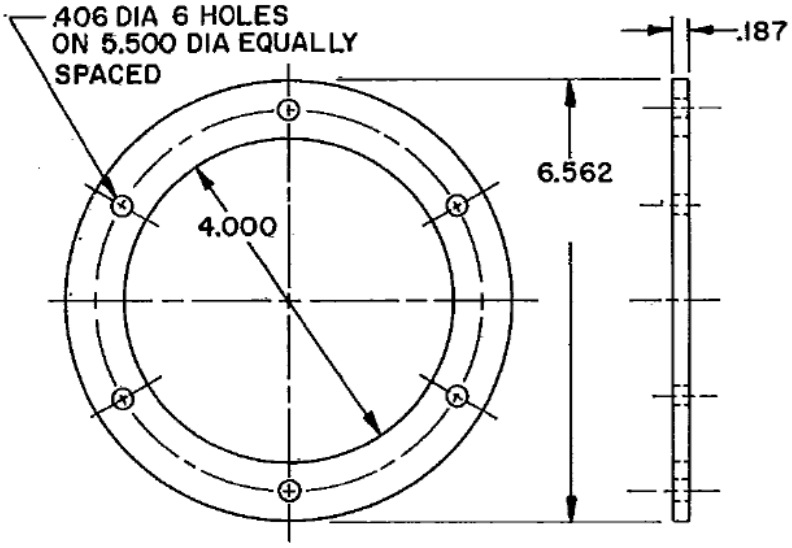


FIGURE 1d. Gasket (NL422B58–055) (Item 24, Table I)


FIGURE 1. Style 58 bowl insulator - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

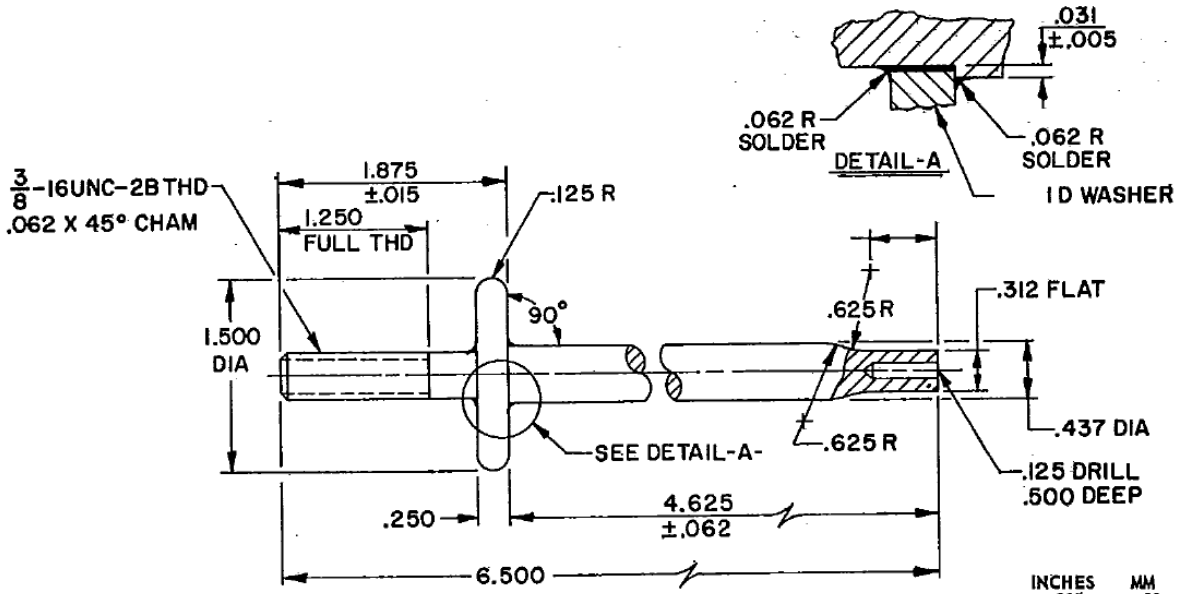


INCHES	MM
.005	.13
.015	.38
.031	.79
.062	1.57
.125	3.18
.250	6.35
.312	7.92
.437	11.10
.500	12.70
.625	15.88
1.062	26.97
1.250	31.75
1.500	38.10
1.875	47.63
4.625	117.48
6.500	165.10
7.750	196.85

FIGURE 1e. Conductor (NL422B58–055)
(Item 26, Table I)

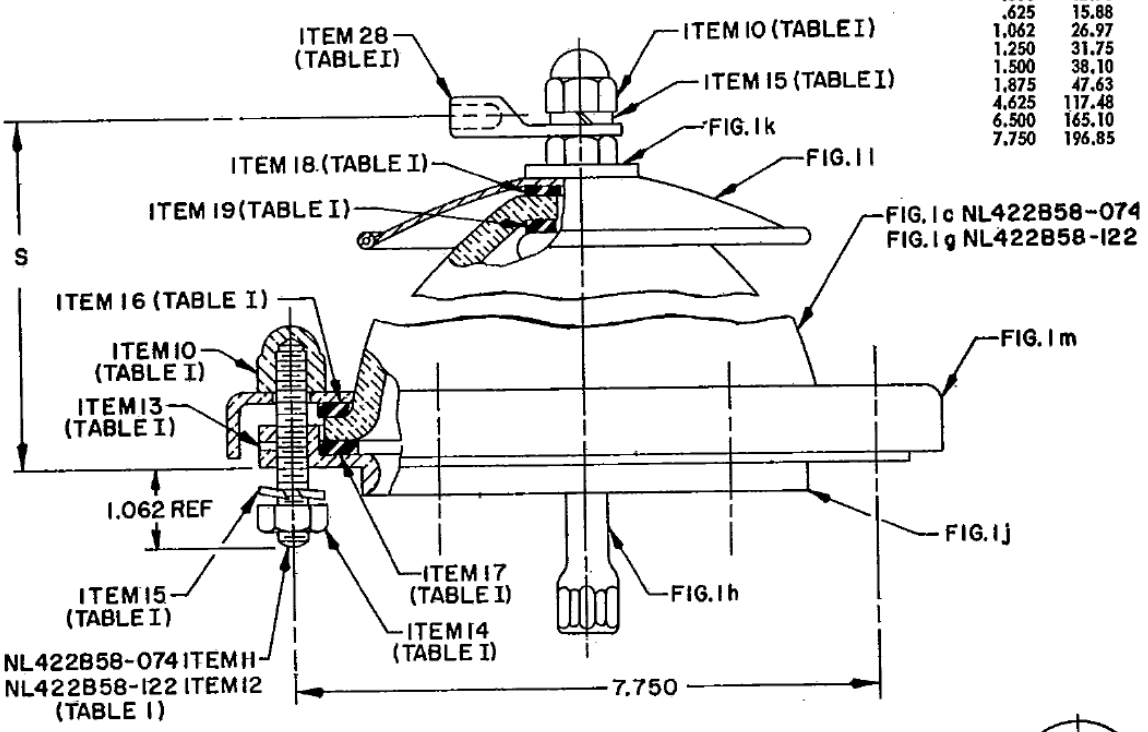

The washer, item 20 is an optional installation item and does not form part of the final assembly. It shall be supplied enclosed in a plastic or other suitable container and attached to top of insulator assembly NL422B58-074.




(Item 20, Table I)

FIGURE 1f. Bowl insulator assembly
(NL422B58–074 and NL422B58–122).

FIGURE 1. Style 58 bowl insulator - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

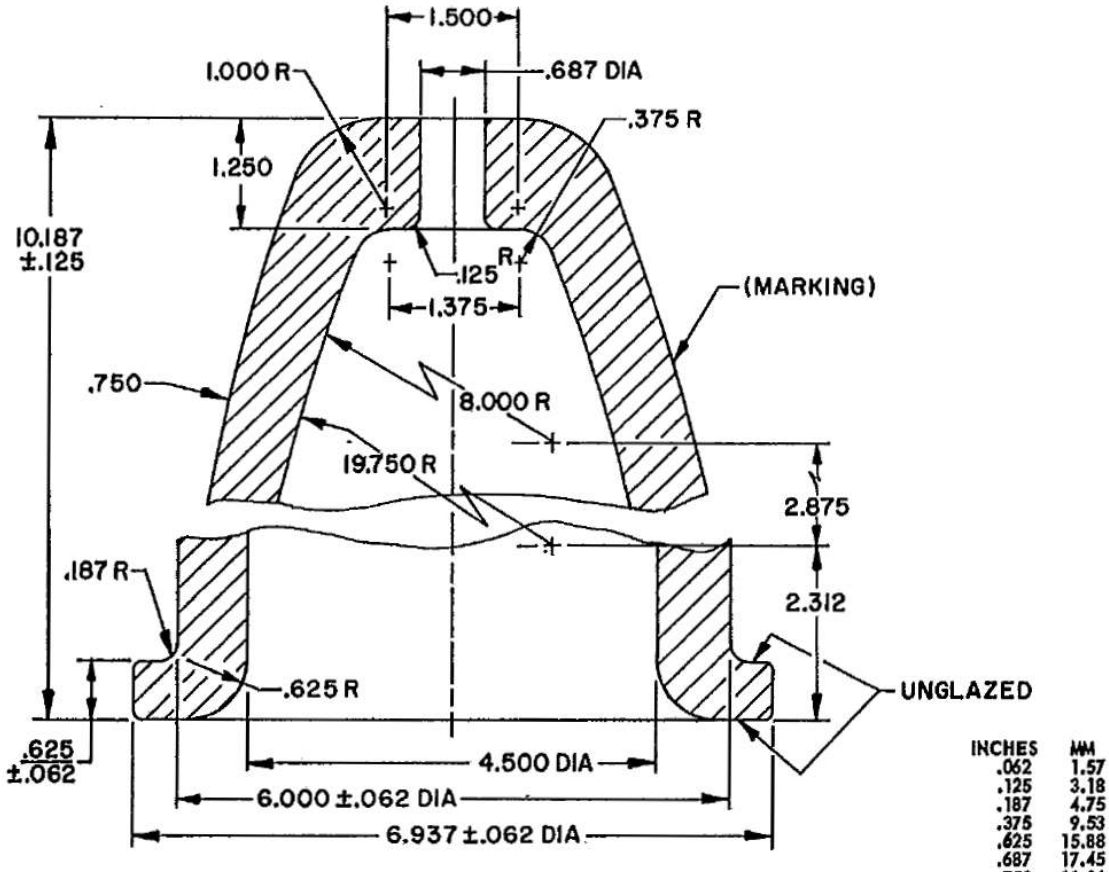

INCHES	MM
.062	1.57
.125	3.18
.187	4.75
.375	9.53
.625	15.88
.687	17.45
.750	19.06
1.000	25.40
1.250	31.75
1.375	34.93
1.500	38.10
2.312	58.72
2.875	73.03
4.500	114.30
6.000	152.40
6.937	176.20
8.000	203.20
10.187	258.75
19.750	501.65

FIGURE 1g. Insulator (NL422B58–122).
(Item 27, Table I)

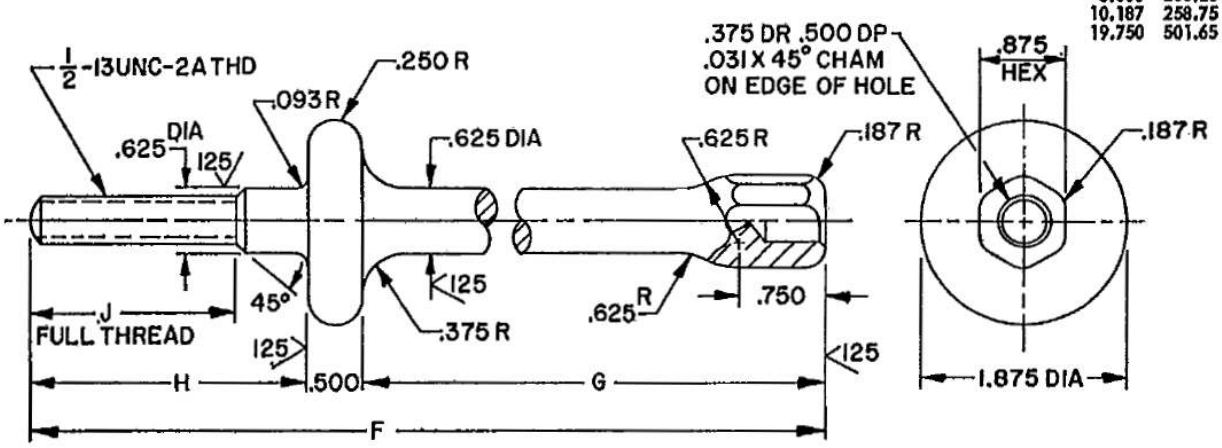


FIGURE 1h. Conductor (NL422B58–074 and NL422B58–122).
(Item 26, Table I)

FIGURE 1. Style 58 bowl insulator - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

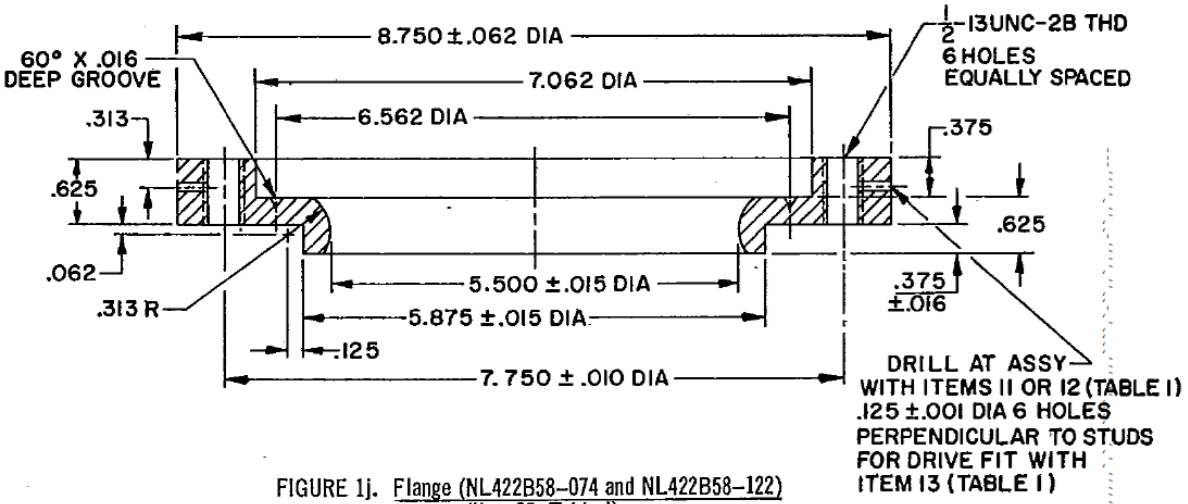


FIGURE 1j. Flange (NL422B58–074 and NL422B58–122)
(Item 25, Table I)

INCHES	MM	INCHES	MM
.001	.03	.625	15.88
.010	.25	.688	17.48
.015	.38	.875	22.23
.016	.41	1.500	38.10
.047	1.19	5.000	127.00
.062	1.57	5.500	139.70
.094	2.39	5.875	149.23
.125	3.18	6.000	152.40
.156	3.96	6.562	166.67
.250	6.35	7.062	179.37
.313	7.95	7.750	196.85
.375	9.53	8.750	222.25
.531	13.49		

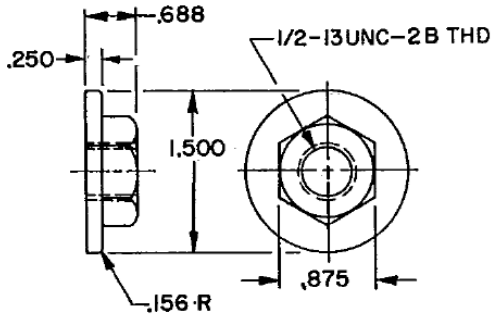


FIGURE 1k. Nut (NL422B58–074 and NL422B58–122).
(Item 21, Table I).

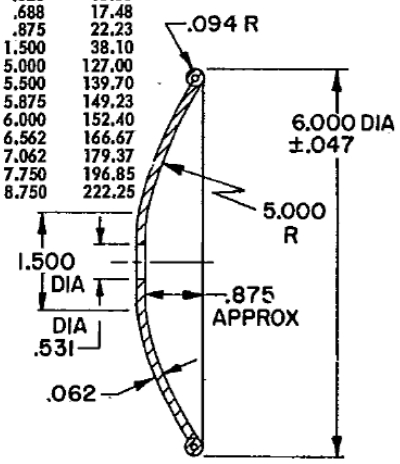


FIGURE 1l. Shield (NL422B58–074 and NL422B58–122).
(Item 22, Table I).

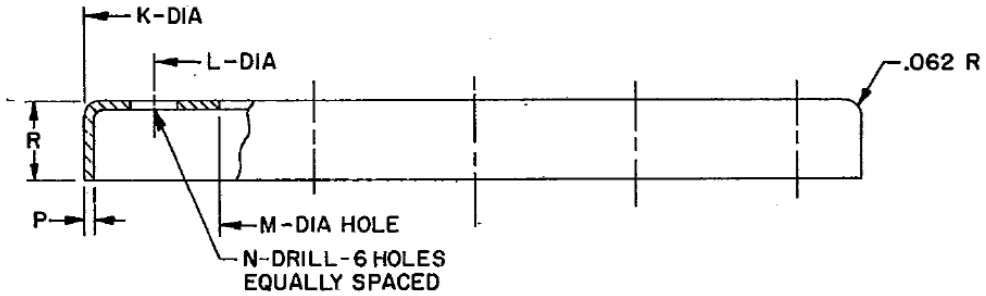


FIGURE 1m. Clamping ring (NL422B58–055,
NL422B58–074, and NL422B58–122).
(Item 23, Table I)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style 58 bowl insulator - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Acorn nut, 3/8-16UNC-2B	Cadmium-plated brass	7
2	Hexagon nut, 3/8-16UNC-2B		7
3	Stud, 3/8-16UNC-2A, 2.312 in. long		6
4	Split type lockwasher per MS35338-103		7
5	Terminal lug per MS35446-7		1
6	Gasket, 5.062 OD, 4.312 ID, .125 THK	Type I, class 2, per MIL-PRF-1149	1
7	Gasket, 1.000 OD, .437 ID, .125 THK		1
8	Gasket, 1.250 OD, .500 ID, .125 THK		1
9	Washer, 1.000 OD, .391 ID, .081 THK	Brass, composition 3, half-hard, per QQ-B-637	1
10	Acorn nut, 1/2-13UNC-2B	Cadmium-plated brass	7
11	Stud, 1/2-13UNC-2A, 2.500 in. long		6
12	Stud, 1/2-13UNC-2A, 2.875 in. long		6
13	Pin, .125 DIA x .812 LG	Stainless steel, class 304, per QQ-S-763	6
14	Hexagon nut, 1/2-13UNC-2B	Cadmium-plated brass	6
15	Lockwasher, per MS35338-105		7
16	Gasket, 7.125 OD, 6.312 ID, .125 THK	Type I, class 2, per MIL-PRF-1149	1
17	Gasket, 7.062 OD, 6.062 ID, .187 THK		1
18	Gasket, 1.500 OD, .562 ID, .125 THK		1
19	Gasket, 1.500 OD, .750 ID, .125 THK		1
20	Washer, 1.375 OD, .562 ID, .080 THK	Brass, composition 3, half-hard, per QQ-B-637	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

TABLE I. Item description - Continued.

Item No.		Material	No. per assembly
21	Nut	Brass, composition 22, half-hard, per QQ-B-626	1
22	Shield	Brass per QQ-B-637 or QQ-B-639	1
23	Clamping ring	Brass per QQ-B-637 or QQ-B-639; or bronze per QQ-L-225	1
24	Gasket	Neoprene, type I, class 2, per MIL-PRF-1149	1
25	Flange	Brass per QQ-B-637 or QQ-B-639; or bronze per QQ-L-225	1
26	Conductor		1
27	Insulator	Ceramic, type A, grade 222 or better, brown glazed, per MIL-I-10	1
28	Terminal lug per MS35446-21		1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

TABLE II. Type designation.

Type designation	Dimensions 1/															
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
NL222B58-055	5.062 (128.57)	3.500 (88.90)	3.500 (88.90)	5.437 (138.10)	.437 (11.10)	See figure 1e				6.750 (171.45)	5.500 (139.70)	4.375 (111.13)	.406 (10.31)	.062 (1.57)	.750 (19.05)	See figure 1a
NL222B58-074	6.937 (176.20)	5.531 (140.49)	4.375 (111.13)	5.000 (127.00)	.687 (17.45)	8.625 (219.08)	6.125 (155.58)	2.000 (50.80)	1.562 (39.67)	9.250 (234.95)	7.750 (196.85)	6.375 (161.93)	.531 (13.49)	.187 (4.75)	.906 (23.01)	6.093 (154.76)
NL222B58-122	See figure 1g					14.750 (355.60)	11.187 (284.15)	3.062 (77.77)	2.500 (63.50)	9.250 (234.95)	7.750 (196.85)	6.375 (161.93)	.531 (13.49)	.187 (4.75)	.906 (23.01)	10.905 (276.99)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1, table I, and table II.

Tolerances:

Ceramic – Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Metal – Unless otherwise specified, the tolerance for metal parts shall be ± .020 inch.

Component Parts:

Ceramic parts – Ceramic per MIL-I-10 shall be grade 222 or better.

Metal parts – Unless otherwise specified, all bearing and exposed metal surfaces shall be machine finished to 125/.

Dielectric withstanding voltage: Secure to a metal grounding plate 18 inches x 18 inches with a hole (4.312 inches diameter for NL422B58-055, and 6.000 inches diameter for NL422B58-074 and NL422B58-122) over which the insulators shall be centered. Apply test voltage of 35 kilovolts between the hardware and the grounding plate.

Amendment notations. Marginal notations are not used in this amendment to identify changes due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - GS

Review Activities:
Army - CR4, MI
Navy – AS, MC
DLA - CC

Preparing Activity:
DLA – GS2

(Project 5970-2025-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.