MILITARY SPECIFICATION SHEET

INSULATORS, STRAIN
(STYLES 64, 65, 66, AND 67)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

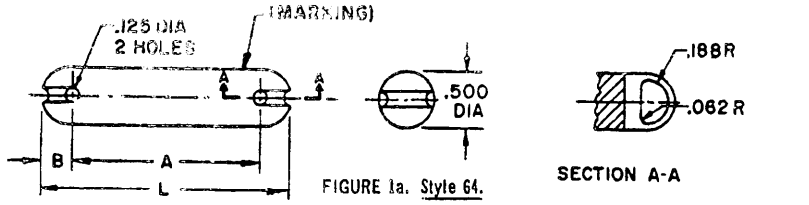


FIGURE 1a. Style 64.


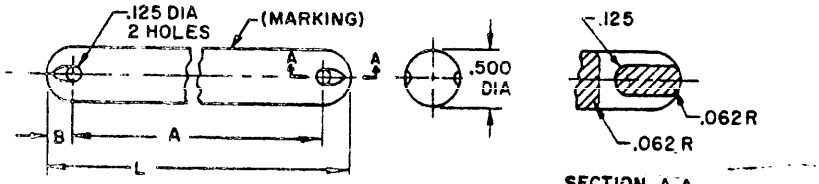


FIGURE 1b. Style 65.

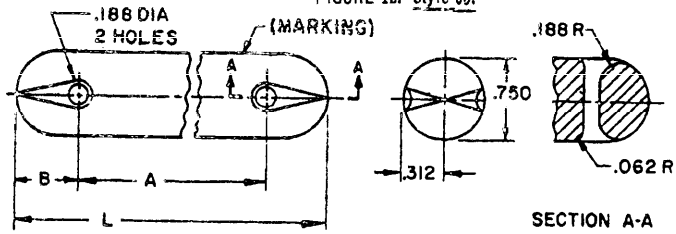

INCHES	MM
.062	1.57
.094	2.39
.125	3.18
.188	4.78
.312	7.92
.406	10.31
.500	12.70
.750	19.05
1.000	25.40
1.500	38.10

FIGURE 1c. Style 66.

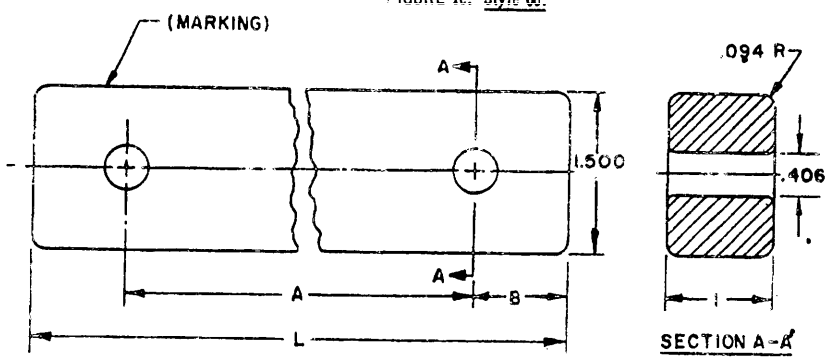


FIGURE 1d. Style 67.

NOTES:
1. All dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Styles 64, 65, 66, and 67 strain insulators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:09Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation.

Type designation	Dimensions 1/		
	A ±.062	B	L ±.026
NL422B64-016 NL422W64-016	2.00 (50.80)	.375 (9.53)	2.750 (69.85)
NL422B65-024 NL422W65-024	3.00 (76.20)	.625 (15.88)	4.250 (107.95)
NL422B65-048 NL422W65-048	6.00 (152.40)	.625 (15.88)	7.250 (184.15)
NL422B66-012 NL422W66-012	1.50 (38.10)	.500 (12.70)	2.500 (63.50)
NL422B66-024 NL422W66-024	3.00 (76.20)	.500 (12.70)	4.000 (101.60)
NL422B66-040 NL422W66-040	5.00 (127.00)	.500 (12.70)	6.000 (152.40)
NL422B67-048 NL422W67-048	6.00 (152.40)	.875 (22.23)	7.750 (196.85)
NL422B67-064 NL422W67-064	8.00 (203.20)	.875 (22.23)	9.750 (247.65)
NL422B67-080 NL422W67-080	10.00 (254.00)	.875 (22.23)	11.750 (298.45)
NL422B67-096 NL422W67-096	12.00 (304.80)	.875 (22.23)	13.750 (349.25)
NL422B67-120 NL422W67-120	15.00 (38.10)	.875 (22.23)	16.750 (425.45)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264. Tolerance of holes shall be .016.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.

Tensile: The minimum working and ultimate tensile loads shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:09Z
Check the source to verify that this is the current version before use.

TABLE II. Tensile loads.

Style	Minimum working load (pounds)	Minimum ultimate load (pounds)
64	---	300
65	---	450
66	---	490
67	1,000	1,800

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0169)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:09Z
Check the source to verify that this is the current version before use.