MIL-I-23264/22A
8 July 1968
SUPERSEDING 1/
MIL-I-23264/22
13 April 1962

MILITARY SPECIFICATION SHEET

INSULATORS, STRAIN
(STYLES 60, 61, 73, 74, AND 75)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

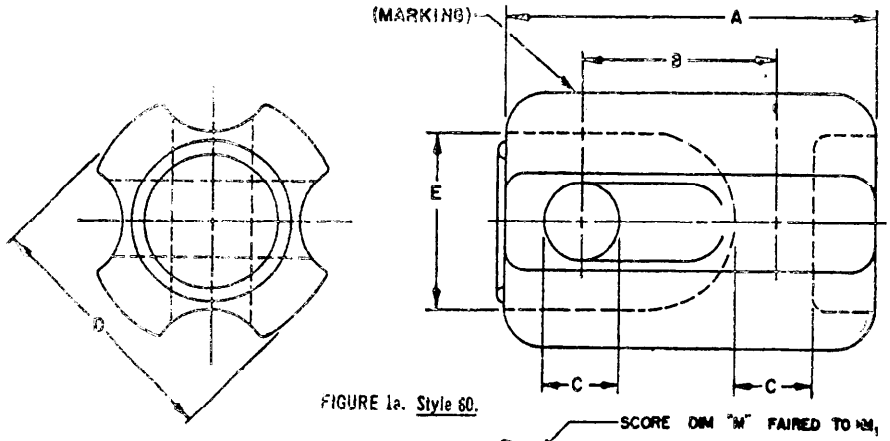


FIGURE 1a. Style 60.


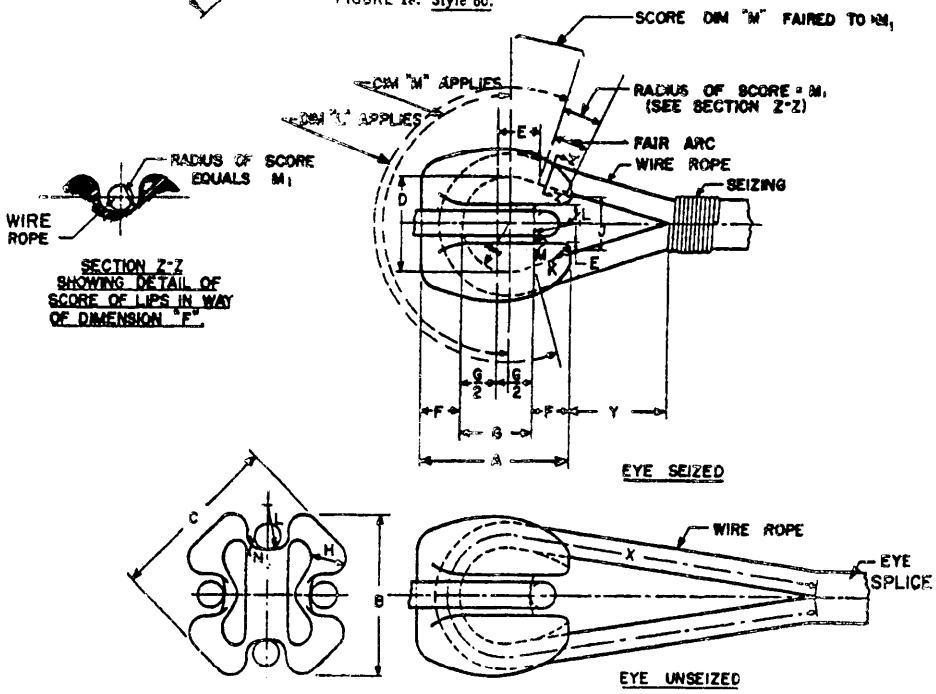



FIGURE 1b. Style 61.

FIGURE 1. Styles 60, 61, 73, 74 and 75 strain insulators.

FSC 5970


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:10Z
Check the source to verify that this is the current version before use.

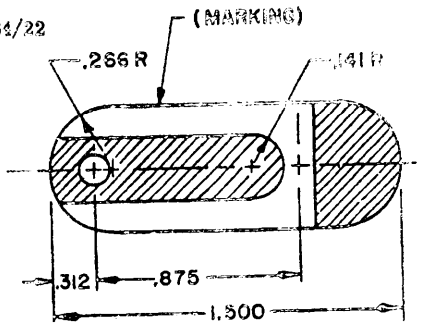



INCHES	MM	INCHES	MM
.094	2.39	.312	7.92
.120	3.05	.531	13.49
.125	3.18	.812	20.62
.141	3.58	.875	22.23
.188	4.78	1.000	25.40
.219	5.56	1.250	31.75
.250	6.35	1.375	34.93
.266	6.76	1.500	38.10

FIGURE 1c. Style 73.

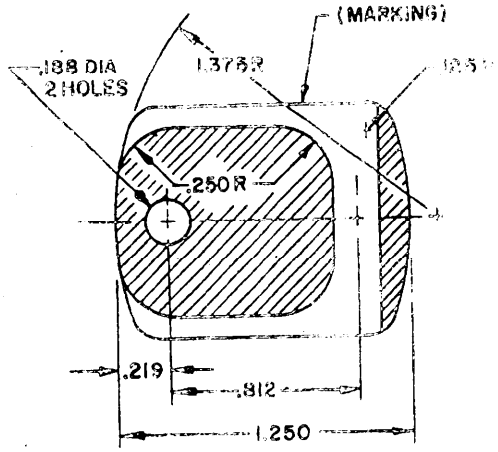

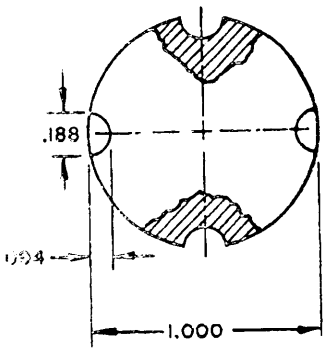


FIGURE 1d. Style 74.

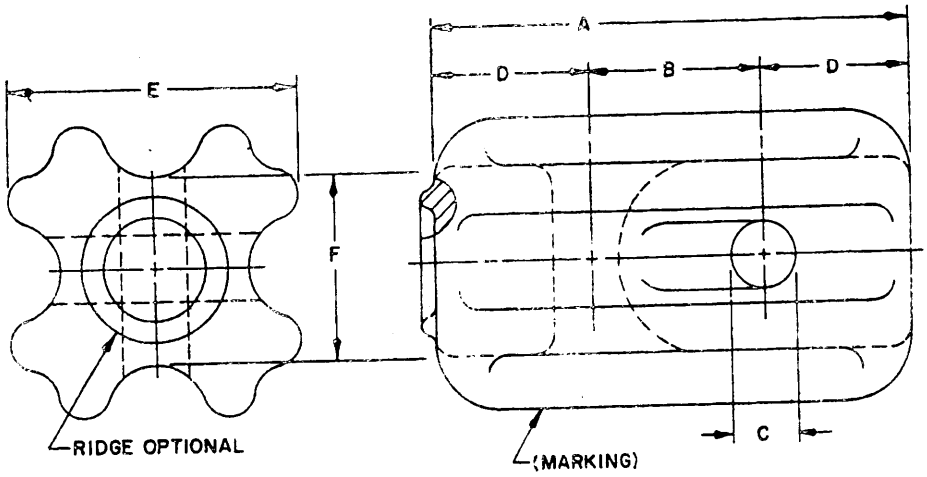


FIGURE 1e. Style 75.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Styles 60, 61, 73, 74 and 75 strain insulators. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:10Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation.

Type designation	Diameter of wire rope	Dimensions 1/															
		A	B	C	D	E	F	G	H	J	K	L	M	N	X	Y
NL222B60-028	---	3.500 (88.90)	1.750 (44.45)	.625 (15.88)	2.500 (63.50)	1.750 (44.45)	---	---	---	---	---	---	---	---	---	---	---
NL222B60-034	---	4.250 (107.95)	2.250 (57.15)	.875 (22.23)	2.875 (73.03)	2.125 (53.98)	---	---	---	---	---	---	---	---	---	---	---
NL222B60-043	---	5.375 (136.53)	3.125 (79.38)	1.000 (25.40)	3.375 (85.73)	2.375 (60.33)	---	---	---	---	---	---	---	---	---	---	---
NL223B61-024 2/	.250 (6.35)	3.000 (76.20)	2.812 (71.42)	3.188 (80.98)	1.500 (38.10)	.375 (9.53)	.625 (15.88)	1.750 (44.45)	.500 (12.70)	.750 (19.05)	.062 (1.57)	.500 (12.70)	.062 (1.57)	.188 (4.78)	16.000 (406.40)	2.125 (53.98)
NL223B61-026 2/	.375 (9.53)	3.312 (84.12)	3.062 (77.77)	3.562 (90.47)	1.750 (44.45)	.562 (14.27)	.750 (19.05)	1.812 (46.02)	.562 (14.27)	.938 (23.83)	.062 (1.57)	.750 (19.05)	.094 (2.39)	.250 (6.35)	18.000 (457.20)	2.250 (57.15)
NL223B61-029 2/	.500 (12.70)	3.625 (92.08)	3.438 (87.33)	4.000 (101.60)	2.000 (50.80)	.750 (19.05)	.875 (22.23)	1.875 (47.63)	.562 (14.27)	1.188 (30.18)	.062 (1.57)	1.000 (25.40)	.125 (3.18)	.312 (7.92)	18.000 (457.20)	2.250 (57.15)
NL223B61-033 2/	.625 (15.88)	4.188 (106.38)	3.938 (100.03)	4.562 (115.87)	2.375 (60.33)	.938 (23.83)	1.062 (26.97)	2.062 (52.37)	.625 (15.88)	1.375 (34.93)	.125 (3.18)	1.250 (31.75)	.156 (3.96)	.406 (10.31)	20.000 (508.00)	2.500 (63.50)
NL223B61-037 2/	.750 (19.05)	4.625 (117.48)	4.562 (115.87)	5.312 (134.92)	2.812 (71.42)	1.125 (28.58)	1.188 (30.18)	2.250 (57.15)	.625 (15.88)	1.688 (42.88)	.125 (3.18)	1.500 (38.10)	.188 (4.78)	.469 (11.91)	24.000 (609.60)	3.000 (76.20)
NL223B61-043 2/	.875 (22.23)	5.375 (136.53)	5.312 (134.92)	6.250 (158.75)	3.375 (85.73)	1.312 (33.32)	1.375 (34.93)	2.625 (66.68)	.750 (19.05)	2.000 (50.80)	.188 (4.78)	1.750 (44.45)	.219 (5.56)	.562 (14.27)	28.000 (711.20)	3.500 (88.90)
NL223B61-048 2/	1.000 (25.40)	6.000 (152.40)	6.250 (158.75)	7.375 (187.33)	4.000 (101.60)	1.500 (38.10)	1.500 (38.10)	3.000 (76.20)	.875 (22.23)	2.438 (61.93)	.250 (16.35)	2.000 (50.80)	.250 (6.35)	.656 (16.66)	32.000 (812.80)	4.250 (107.95)
NL422B73-012	---	See figure 1c						---	---	---	---	---	---	---	---	---
NL422W73-012	---							---	---	---	---	---	---	---	---	---
NL222B74-010	---	See figure 1d						---	---	---	---	---	---	---	---	---
NL222W74-010	---							---	---	---	---	---	---	---	---	---
NL222B75-027	---	3.375 (85.73)	1.500 (38.10)	.375 (9.53)	.938 (23.83)	2.500 (63.50)	1.500 (38.10)	---	---	---	---	---	---	---	---	---
NL222B75-031	---	3.875 (98.43)	1.625 (41.28)	.625 (15.88)	1.250 (31.75)	2.500 (63.50)	1.500 (38.10)	---	---	---	---	---	---	---	---	---
NL222B75-043	---	5.312 (134.92)	1.937 (49.20)	.750 (19.05)	1.687 (42.85)	3.250 (82.55)	2.125 (53.98)	---	---	---	---	---	---	---	---	---
NL222B75-044	---	5.500 (139.70)	2.750 (69.85)	.875 (22.23)	1.375 (34.93)	3.062 (77.77)	2.062 (52.37)	---	---	---	---	---	---	---	---	---
NL222B75-054	---	6.750 (171.45)	2.625 (66.68)	1.000 (25.40)	2.062 (52.37)	3.500 (88.90)	2.500 (63.50)	---	---	---	---	---	---	---	---	---

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

2/ Tolerance for A, B, C, D, F, H, K, L, M, and N shall be plus 6 percent, minus 0 percent. Tolerance for E, G, and J shall be plus 0 percent, minus 3 percent. Dimensions for X and Y are approximate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1c, 1d, and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Tensile: The minimum ultimate tensile load for style 75 shall be 10,500 pounds, and the minimum average tensile load shall be 12,000 pounds.

Ceramic Parts - Ceramic per MIL-I-10, shall be of the grade specified herein, or better.
Style 60, 74 and 75 shall be grade 222 or better.
Style 61 shall be grade 223 or better.
Style 73 shall be grade 422 or better.

1/ This Specification Sheet replaces Military Specification MIL-I-17918.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0171)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:10Z
Check the source to verify that this is the current version before use.