
MILITARY SPECIFICATION SHEET

INSULATORS, SPREADER
(STYLE 76)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

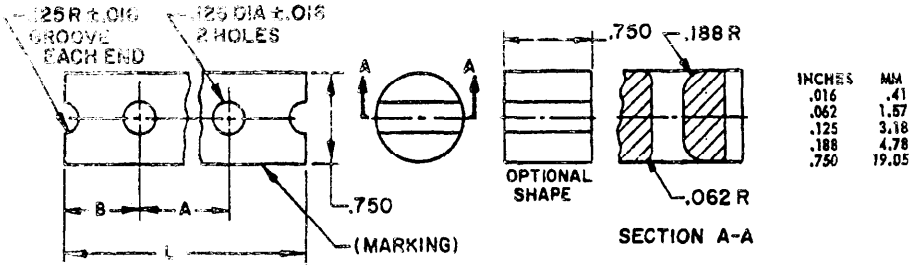

NOTES:
1. All dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style 76 spreader insulator.

TABLE I. Type designation.

Type designation	Dimensions		
	A	B	L 1/
NL422B76-024 NL422W76-024	3.000 (76.20)	.562 (14.27)	4.125 (104.78)
NL422B76-040 NL422W76-040	5.000 (127.00)	.500 (12.70)	6.000 (152.40)
NL422B76-064 NL422W76-064	8.000 (203.20)	.500 (12.70)	9.000 (228.60)
NL422B76-072 NL422W76-072	9.000 (228.60)	.562 (14.27)	10.125 (257.18)
NL422B76-088 NL422W76-088	11.000 (279.40)	.500 (12.70)	12.000 (304.80)
NL422B76-096 NL422W76-096	12.000 (304.80)	.562 (14.27)	13.125 (330.20)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1, and table I.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Component parts:
Ceramic parts - Ceramic per MIL-I-10 shall be grade 422 or better.

Tensile: The minimum ultimate tensile load shall be 490 pounds.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0172)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20260-19T16:10Z
Check the source to verify that this is the current version before use.