
MILITARY SPECIFICATION SHEET

INSULATORS, PIN
(STYLE 81)

The complete requirements for procuring the insulators described herein shall consist of this document and the latest issue of Specification MIL-I-23264.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

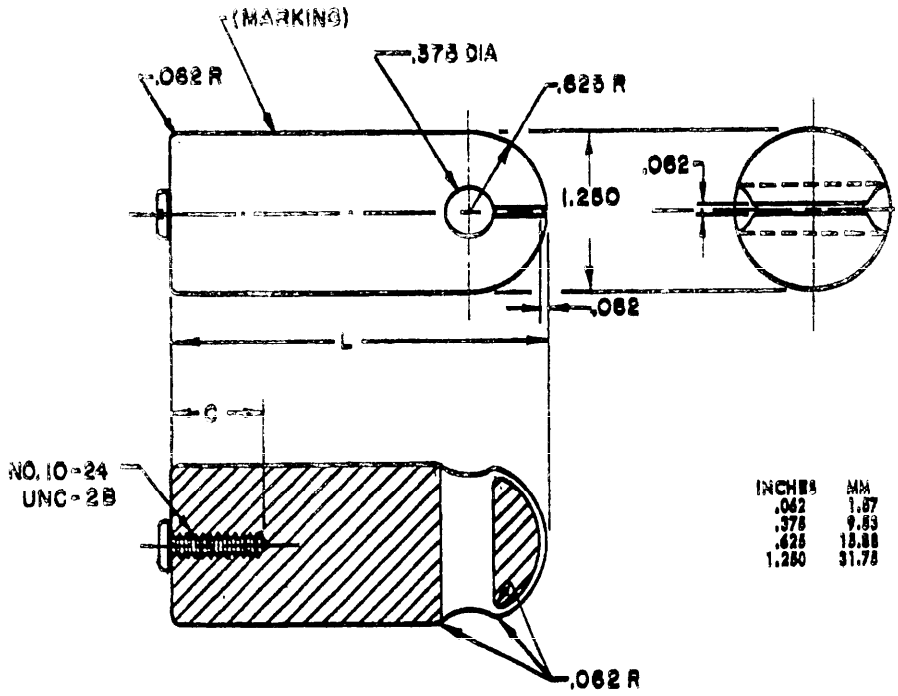

NOTES:
1. All dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch=25.4 mm.

FIGURE 1. Style 81, pin insulator.

FSC 5970

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:10Z
Check the source to verify that this is the currentversion before use.

TABLE I. Item description.

Item No.	Description	Material	No. per assembly
1	Machine screw, panhead, slotted, 10-24-UNC-2B	Carbon steel, FS1060 to FS1080, Rockwell "C" 45-53 per QQ-S-633, and shall be cadmium plated, type II, class C, per QQ-P-416	1
2	Lockwasher per MS35338-43		1

TABLE II. Type designation.

Type designation	Dimensions 1/	
	C	L
NL422B81-012 NL422W81-012	.500 (12.70)	1.500 (38.10)
NL422B81-024 NL422W81-024	.625 (15.88)	3.000 (76.20)

1/ Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4. Millimeters are in parentheses.

REQUIREMENTS:

Dimensions: See figure 1 and table II.

Tolerances:
Ceramic - Unless otherwise specified, the tolerances for ceramic parts shall be as specified in table IV of MIL-I-23264.

Component parts:
Ceramic parts - Ceramic per MIL-I-[illegible] shall be grade 422 or better.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, MU
Navy - SH, EC
Air Force - 85
DSA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force -

Preparing activity:
Navy - EC

(Project 5970-0174)

Revision letters are not used to indicate changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:10Z
Check the source to verify that this is the current version before use.