
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC,
(AXIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY,
STYLE CYR10

This limited coordination Military specification sheet has been prepared by the Department of the Air Force based upon currently available technical information, but it has not been approved for promulgation as a coordinated revision of Military Specification Sheet MIL-C-23269/1. It is subject to modification. However, pending its promulgation as a coordinated Military specification sheet, it may be used in procurement.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-23269.

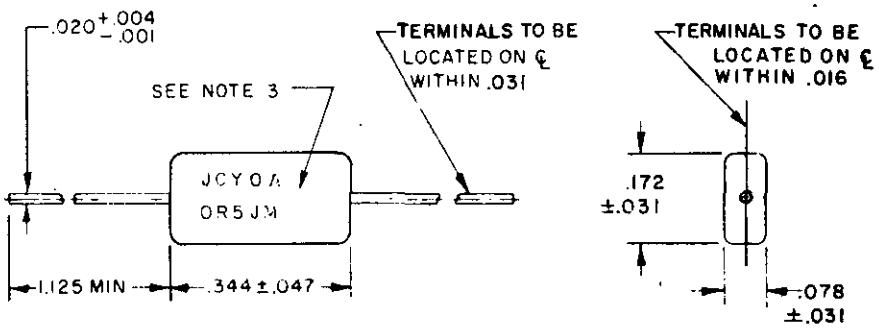


| INCHES | MM |
|---|---|
| .001 | .03 |
| .004 | .10 |
| .016 | .41 |
| .020 | .51 |
| .031 | .79 |
| .047 | 1.19 |
| .078 | 1.98 |
| .172 | 4.37 |
| .344 | 8.74 |
| 1.125 | 28.58 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. See marking requirement.

(D) denotes change.

FSC 5910



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure.
Case material - Glass.
Terminals - Axial wire-lead; solder coated, copper-clad, nickel-iron core (46% nickel, 54% iron).
Capacitance (Cap.) (nom) - See table I.
Cap. tolerance - See table I.
Rated voltage - See table I.
Failure rate level - L, M, P, R, or S.
Rated temperature - -55° to +125°C.
Temperature coefficient - 140 ±25 parts/million/°C.
Capacitance drift - 0.1% or 0.1 pF, whichever is greater.
Seal - Hermetic.

Seal: Test I.

Insulation resistance: 10,000 megohms or 200 ohm-farads min (qualification inspection only at +125°C). 100,000 megohms min (at +25°C).


Dissipation factor (DF): 0.1% max.

Thermal shock and moisture resistance:
DF - 0.1% max.

Q: In accordance with MIL-C-23269.

Life:
ΔCap. (240 hr and 2,000 hr) - 0.5% or 0.5 pF, max.
DF (240 hr and 2,000 hr) - 0.15% max.

Marking:

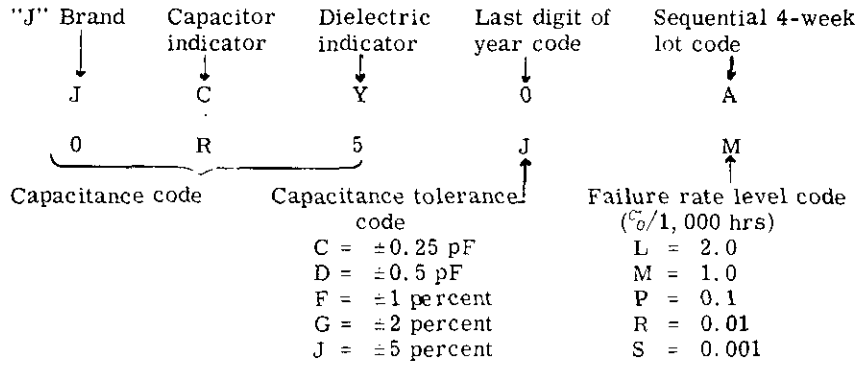


Substitutability data: See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

| Cap. | Capacitance tolerance | Dash number M23269/01- FR level in %/1,000 hours | | | | | |
|---|---|---|---|---|---|---|---|
| | | 500 Vdc | | | | | (D) 100 Vdc |
| | | L (2.0) | M (1.0) | P (0.1) | R (0.01) | S (0.001) | S (0.001) 1/ |
| (pF) | | | | | | | |
| 0.5 | ±0.25 pF | 2001 | 3001 | 4001 | 5001 | 6001 | 7001 |
| 1.0 | ±0.25 pF | 2002 | 3002 | 4002 | 5002 | 6002 | 7002 |
| 1.5 | ±0.25 pF | 2003 | 3003 | 4003 | 5003 | 6003 | 7003 |
| 2.2 | ±0.25 pF | 2004 | 3004 | 4004 | 5004 | 6004 | 7004 |
| 2.2 | ±0.50 pF | 2005 | 3005 | 4005 | 5005 | 6005 | 7005 |
| 2.7 | ±0.25 pF | 2006 | 3006 | 4006 | 5006 | 6006 | 7006 |
| 3.0 | ±0.25 pF | 2007 | 3007 | 4007 | 5007 | 6007 | 7007 |
| 3.0 | ±0.50 pF | 2008 | 3008 | 4008 | 5008 | 6008 | 7008 |
| 3.3 | ±0.25 pF | 2009 | 3009 | 4009 | 5009 | 6009 | 7009 |
| 3.6 | ±0.25 pF | 2010 | 3010 | 4010 | 5010 | 6010 | 7010 |
| 3.6 | ±0.50 pF | 2011 | 3011 | 4011 | 5011 | 6011 | 7011 |
| 3.9 | ±0.25 pF | 2012 | 3012 | 4012 | 5012 | 6012 | 7012 |
| 4.3 | ±0.25 pF | 2013 | 3013 | 4013 | 5013 | 6013 | 7013 |
| 4.3 | ±0.50 pF | 2014 | 3014 | 4014 | 5014 | 6014 | 7014 |
| 4.7 | ±0.25 pF | 2015 | 3015 | 4015 | 5015 | 6015 | 7015 |
| 5.1 | ±0.25 pF | 2016 | 3016 | 4016 | 5016 | 6016 | 7016 |
| 5.6 | ±0.25 pF | 2017 | 3017 | 4017 | 5017 | 6017 | 7017 |
| 5.6 | ±5% | 2018 | 3018 | 4018 | 5018 | 6018 | 7018 |
| 6.2 | ±0.25 pF | 2019 | 3019 | 4019 | 5019 | 6019 | 7019 |
| 6.2 | ±5% | 2020 | 3020 | 4020 | 5020 | 6020 | 7020 |
| 6.8 | ±0.25 pF | 2021 | 3021 | 4021 | 5021 | 6021 | 7021 |
| 6.8 | ±5% | 2022 | 3022 | 4022 | 5022 | 6022 | 7022 |
| 7.5 | ±0.25 pF | 2023 | 3023 | 4023 | 5023 | 6023 | 7023 |
| 7.5 | ±5% | 2024 | 3024 | 4024 | 5024 | 6024 | 7024 |
| 8.2 | ±0.25 pF | 2025 | 3025 | 4025 | 5025 | 6025 | 7025 |
| 8.2 | ±5% | 2026 | 3026 | 4026 | 5026 | 6026 | 7026 |
| 9.1 | ±0.25 pF | 2027 | 3027 | 4027 | 5027 | 6027 | 7027 |
| 9.1 | ±5% | 2028 | 3028 | 4028 | 5028 | 6028 | 7028 |
| 10 | ±0.25 pF | 2029 | 3029 | 4029 | 5029 | 6029 | 7029 |
| 10 | ±5% | 2030 | 3030 | 4030 | 5030 | 6030 | 7030 |
| 11 | ±0.25 pF | 2031 | 3031 | 4031 | 5031 | 6031 | 7031 |
| 11 | ±5% | 2032 | 3032 | 4032 | 5032 | 6032 | 7032 |
| 12 | ±0.25 pF | 2033 | 3033 | 4033 | 5033 | 6033 | 7033 |
| 12 | ±5% | 2034 | 3034 | 4034 | 5034 | 6034 | 7034 |
| 13 | ±2% | 2035 | 3035 | 4035 | 5035 | 6035 | 7035 |
| 13 | ±5% | 2036 | 3036 | 4036 | 5036 | 6036 | 7036 |
| 15 | ±2% | 2037 | 3037 | 4037 | 5037 | 6037 | 7037 |
| 15 | ±5% | 2038 | 3038 | 4038 | 5038 | 6038 | 7038 |
| 16 | ±2% | 2039 | 3039 | 4039 | 5039 | 6039 | 7039 |
| 16 | ±5% | 2040 | 3040 | 4040 | 5040 | 6040 | 7040 |
| 18 | ±2% | 2041 | 3041 | 4041 | 5041 | 6041 | 7041 |
| 18 | ±5% | 2042 | 3042 | 4042 | 5042 | 6042 | 7042 |
| 20 | ±2% | 2043 | 3043 | 4043 | 5043 | 6043 | 7043 |
| 20 | ±5% | 2044 | 3044 | 4044 | 5044 | 6044 | 7044 |
| 22 | ±2% | 2045 | 3045 | 4045 | 5045 | 6045 | 7045 |
| 22 | ±5% | 2046 | 3046 | 4046 | 5046 | 6046 | 7046 |
| 24 | ±2% | 2047 | 3047 | 4047 | 5047 | 6047 | 7047 |
| 24 | ±5% | 2048 | 3048 | 4048 | 5048 | 6048 | 7048 |
| 27 | ±1% | 2049 | 3049 | 4049 | 5049 | 6049 | 7049 |
| 27 | ±2% | 2050 | 3050 | 4050 | 5050 | 6050 | 7050 |
| 27 | ±5% | 2051 | 3051 | 4051 | 5051 | 6051 | 7051 |

1/ *See footnote at end of table.*



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers - Continued.

| Cap. | Capacitance tolerance | Dash number M23269/01- FR level in %/1,000 hours | | | | | |
|---|---|---|---|---|---|---|---|
| | | 500 Vdc | | | | | Ⓓ 100 Vdc |
| | | L (2.0) | M (1.0) | P (0.1) | R (0.01) | S (0.001) | S (0.001) 1/ |
| (pF) | | | | | | | |
| 30 | ±1% | 2052 | 3052 | 4052 | 5052 | 6052 | 7052 |
| 30 | ±2% | 2053 | 3053 | 4053 | 5053 | 6053 | 7053 |
| 30 | ±5% | 2054 | 3054 | 4054 | 5054 | 6054 | 7054 |
| 33 | ±1% | 2055 | 3055 | 4055 | 5055 | 6055 | 7055 |
| 33 | ±2% | 2056 | 3056 | 4056 | 5056 | 6056 | 7056 |
| 33 | ±5% | 2057 | 3057 | 4057 | 5057 | 6057 | 7057 |
| 36 | ±1% | 2058 | 3058 | 4058 | 5058 | 6058 | 7058 |
| 36 | ±2% | 2059 | 3059 | 4059 | 5059 | 6059 | 7059 |
| 36 | ±5% | 2060 | 3060 | 4060 | 5060 | 6060 | 7060 |
| 39 | ±1% | 2061 | 3061 | 4061 | 5061 | 6061 | 7061 |
| 39 | ±2% | 2062 | 3062 | 4062 | 5062 | 6062 | 7062 |
| 39 | ±5% | 2063 | 3063 | 4063 | 5063 | 6063 | 7063 |
| 43 | ±1% | 2064 | 3064 | 4064 | 5064 | 6064 | 7064 |
| 43 | ±2% | 2065 | 3065 | 4065 | 5065 | 6065 | 7065 |
| 43 | ±5% | 2066 | 3066 | 4066 | 5066 | 6066 | 7066 |
| 47 | ±1% | 2067 | 3067 | 4067 | 5067 | 6067 | 7067 |
| 47 | ±2% | 2068 | 3068 | 4068 | 5068 | 6068 | 7068 |
| 47 | ±5% | 2069 | 3069 | 4069 | 5069 | 6069 | 7069 |
| 51 | ±1% | 2070 | 3070 | 4070 | 5070 | 6070 | 7070 |
| 51 | ±2% | 2071 | 3071 | 4071 | 5071 | 6071 | 7071 |
| 51 | ±5% | 2072 | 3072 | 4072 | 5072 | 6072 | 7072 |
| 56 | ±1% | 2073 | 3073 | 4073 | 5073 | 6073 | 7073 |
| 56 | ±2% | 2074 | 3074 | 4074 | 5074 | 6074 | 7074 |
| 56 | ±5% | 2075 | 3075 | 4075 | 5075 | 6075 | 7075 |
| 62 | ±1% | 2076 | 3076 | 4076 | 5076 | 6076 | 7076 |
| 62 | ±2% | 2077 | 3077 | 4077 | 5077 | 6077 | 7077 |
| 62 | ±5% | 2078 | 3078 | 4078 | 5078 | 6078 | 7078 |
| 68 | ±1% | 2079 | 3079 | 4079 | 5079 | 6079 | 7079 |
| 68 | ±2% | 2080 | 3080 | 4080 | 5080 | 6080 | 7080 |
| 68 | ±5% | 2081 | 3081 | 4081 | 5081 | 6081 | 7081 |
| 75 | ±1% | 2082 | 3082 | 4082 | 5082 | 6082 | 7082 |
| 75 | ±2% | 2083 | 3083 | 4083 | 5083 | 6083 | 7083 |
| 75 | ±5% | 2084 | 3084 | 4084 | 5084 | 6084 | 7084 |
| 82 | ±1% | 2085 | 3085 | 4085 | 5085 | 6085 | 7085 |
| 82 | ±2% | 2086 | 3086 | 4086 | 5086 | 6086 | 7086 |
| 82 | ±5% | 2087 | 3087 | 4087 | 5087 | 6087 | 7087 |
| 91 | ±1% | 2088 | 3088 | 4088 | 5088 | 6088 | 7088 |
| 91 | ±2% | 2089 | 3089 | 4089 | 5089 | 6089 | 7089 |
| 91 | ±5% | 2090 | 3090 | 4090 | 5090 | 6090 | 7090 |
| 100 | ±1% | 2091 | 3091 | 4091 | 5091 | 6091 | 7091 |
| 100 | ±2% | 2092 | 3092 | 4092 | 5092 | 6092 | 7092 |
| 100 | ±5% | 2093 | 3093 | 4093 | 5093 | 6093 | 7093 |
| 110 | ±1% | 2094 | 3094 | 4094 | 5094 | 6094 | 7094 |
| 110 | ±2% | 2095 | 3095 | 4095 | 5095 | 6095 | 7095 |
| 110 | ±5% | 2096 | 3096 | 4096 | 5096 | 6096 | 7096 |
| 120 | ±1% | 2097 | 3097 | 4097 | 5097 | 6097 | 7097 |
| 120 | ±2% | 2098 | 3098 | 4098 | 5098 | 6098 | 7098 |
| 120 | ±5% | 2099 | 3099 | 4099 | 5099 | 6099 | 7099 |
| 130 | ±1% | 2100 | 3100 | 4100 | 5100 | 6100 | 7100 |
| 130 | ±2% | 2101 | 3101 | 4101 | 5101 | 6101 | 7101 |
| 130 | ±5% | 2102 | 3102 | 4102 | 5102 | 6102 | 7102 |

1/ See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers - Continued.

| Cap. | Capacitance tolerance | Dash number M23269/01- FR level in %/1,000 hours | | | | | |
|---|---|---|---|---|---|---|---|
| | | 500 Vdc | | | | | Ⓓ 100 Vdc |
| | | L (2.0) | M (1.0) | P (0.1) | R (0.01) | S (0.001) | S (0.001) 1/ |
| (pF) | | | | | | | |
| 150 | ±1% | 2103 | 3103 | 4103 | 5103 | 6103 | 7103 |
| 150 | ±2% | 2104 | 3104 | 4104 | 5104 | 6104 | 7104 |
| 150 | ±5% | 2105 | 3105 | 4105 | 5105 | 6105 | 7105 |
| 160 | ±1% | 2106 | 3106 | 4106 | 5106 | 6106 | 7106 |
| 160 | ±2% | 2107 | 3107 | 4107 | 5107 | 6107 | 7107 |
| 160 | ±5% | 2108 | 3108 | 4108 | 5108 | 6108 | 7108 |
| 180 | ±1% | 2109 | 3109 | 4109 | 5109 | 6109 | 7109 |
| 180 | ±2% | 2110 | 3110 | 4110 | 5110 | 6110 | 7110 |
| 180 | ±5% | 2111 | 3111 | 4111 | 5111 | 6111 | 7111 |
| 200 | ±1% | 2112 | 3112 | 4112 | 5112 | 6112 | 7112 |
| 200 | ±2% | 2113 | 3113 | 4113 | 5113 | 6113 | 7113 |
| 200 | ±5% | 2114 | 3114 | 4114 | 5114 | 6114 | 7114 |
| | | 300 Vdc | | | | | Ⓓ 100 Vdc |
| 220 | ±1% | 2115 | 3115 | 4115 | 5115 | 6115 | 7115 |
| 220 | ±2% | 2116 | 3116 | 4116 | 5116 | 6116 | 7116 |
| 220 | ±5% | 2117 | 3117 | 4117 | 5117 | 6117 | 7117 |
| 240 | ±1% | 2118 | 3118 | 4118 | 5118 | 6118 | 7118 |
| 240 | ±2% | 2119 | 3119 | 4119 | 5119 | 6119 | 7119 |
| 240 | ±5% | 2120 | 3120 | 4120 | 5120 | 6120 | 7120 |
| 270 | ±1% | 2121 | 3121 | 4121 | 5121 | 6121 | 7121 |
| 270 | ±2% | 2122 | 3122 | 4122 | 5122 | 6122 | 7122 |
| 270 | ±5% | 2123 | 3123 | 4123 | 5123 | 6123 | 7123 |
| 300 | ±1% | 2124 | 3124 | 4124 | 5124 | 6124 | 7124 |
| 300 | ±2% | 2125 | 3125 | 4125 | 5125 | 6125 | 7125 |
| 300 | ±5% | 2126 | 3126 | 4126 | 5126 | 6126 | 7126 |

1/ Sixth power rule applies for derating at 0.5 $\frac{\text{operating}}{\text{rated}}$ voltage ratios and below.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

| Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- | | Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- | |
|---|---|---|---|---|---|
| | FR level in %/1,000 hrs | | | FR level in %/1,000 hrs | |
| | L (2.0) | M (1.0) | | L (2.0) | M (1.0) |
| CYR10C0R5C | 2001 | 3001 | CYR10C300F | 2052 | 3052 |
| CYR10C1ROC | 2002 | 3002 | CYR10C300G | 2053 | 3053 |
| CYR10C1R5C | 2003 | 3003 | CYR10C300J | 2054 | 3054 |
| CYR10C2R2C | 2004 | 3004 | CYR10C330F | 2055 | 3055 |
| CYR10C2R2D | 2005 | 3005 | CYR10C330G | 2056 | 3056 |
| CYR10C2R7C | 2006 | 3006 | CYR10C330J | 2057 | 3057 |
| CYR10C3R0C | 2007 | 3007 | CYR10C360F | 2058 | 3058 |
| CYR10C3R0D | 2008 | 3008 | CYR10C360G | 2059 | 3059 |
| CYR10C3R3C | 2009 | 3009 | CYR10C360J | 2060 | 3060 |
| CYR10C3R6C | 2010 | 3010 | CYR10C390F | 2061 | 3061 |
| CYR10C3R6D | 2011 | 3011 | CYR10C390G | 2062 | 3062 |
| CYR10C3R9C | 2012 | 3012 | CYR10C390J | 2063 | 3063 |
| CYR10C4R3C | 2013 | 3013 | CYR10C430F | 2064 | 3064 |
| CYR10C4R3D | 2014 | 3014 | CYR10C430G | 2065 | 3065 |
| CYR10C4R7C | 2015 | 3015 | CYR10C430J | 2066 | 3066 |
| CYR10C5R1C | 2016 | 3016 | CYR10C470F | 2067 | 3067 |
| CYR10C5R6C | 2017 | 3017 | CYR10C470G | 2068 | 3068 |
| CYR10C5R6J | 2018 | 3018 | CYR10C470J | 2069 | 3069 |
| CYR10C6R2C | 2019 | 3019 | CYR10C510F | 2070 | 3070 |
| CYR10C6R2J | 2020 | 3020 | CYR10C510G | 2071 | 3071 |
| CYR10C6R8C | 2021 | 3021 | CYR10C510J | 2072 | 3072 |
| CYR10C6R8J | 2022 | 3022 | CYR10C560F | 2073 | 3073 |
| CYR10C7R5C | 2023 | 3023 | CYR10C560G | 2074 | 3074 |
| CYR10C7R5J | 2024 | 3024 | CYR10C560J | 2075 | 3075 |
| CYR10C8R2C | 2025 | 3025 | CYR10C620F | 2076 | 3076 |
| CYR10C8R2J | 2026 | 3026 | CYR10C620G | 2077 | 3077 |
| CYR10C9R1C | 2027 | 3027 | CYR10C620J | 2078 | 3078 |
| CYR10C9R1J | 2028 | 3028 | CYR10C680F | 2079 | 3079 |
| CYR10C100C | 2029 | 3029 | CYR10C680G | 2080 | 3080 |
| CYR10C100J | 2030 | 3030 | CYR10C680J | 2081 | 3081 |
| CYR10C110C | 2031 | 3031 | CYR10C750F | 2082 | 3082 |
| CYR10C110J | 2032 | 3032 | CYR10C750G | 2083 | 3083 |
| CYR10C120C | 2033 | 3033 | CYR10C750J | 2084 | 3084 |
| CYR10C120J | 2034 | 3034 | CYR10C820F | 2085 | 3085 |
| CYR10C130G | 2035 | 3035 | CYR10C820G | 2086 | 3086 |
| CYR10C130J | 2036 | 3036 | CYR10C820J | 2087 | 3087 |
| CYR10C150G | 2037 | 3037 | CYR10C910F | 2088 | 3088 |
| CYR10C150J | 2038 | 3038 | CYR10C910G | 2089 | 3089 |
| CYR10C160G | 2039 | 3039 | CYR10C910J | 2090 | 3090 |
| CYR10C160J | 2040 | 3040 | CYR10C101F | 2091 | 3091 |
| CYR10C180G | 2041 | 3041 | CYR10C101G | 2092 | 3092 |
| CYR10C180J | 2042 | 3042 | CYR10C101J | 2093 | 3093 |
| CYR10C200G | 2043 | 3043 | CYR10C111F | 2094 | 3094 |
| CYR10C200J | 2044 | 3044 | CYR10C111G | 2095 | 3095 |
| CYR10C220G | 2045 | 3045 | CYR10C111J | 2096 | 3096 |
| CYR10C220J | 2046 | 3046 | CYR10C121F | 2097 | 3097 |
| CYR10C240G | 2047 | 3047 | CYR10C121G | 2098 | 3098 |
| CYR10C240J | 2048 | 3048 | CYR10C121J | 2099 | 3099 |
| CYR10C270F | 2049 | 3049 | CYR10C131F | 2100 | 3100 |
| CYR10C270G | 2050 | 3050 | CYR10C131G | 2101 | 3101 |
| CYR10C270J | 2051 | 3051 | CYR10C131J | 2102 | 3102 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data. - Continued

| Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- | | Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- | |
|---|---|---|---|---|---|
| | FR level in %/1,000 hrs | | | FR level in %/1,000 hrs | |
| | L (2.0) | M (1.0) | | L (2.0) | M (1.0) |
| CYR10C151F | 2103 | 3103 | CYR10C221F | 2115 | 3115 |
| CYR10C151G | 2104 | 3104 | CYR10C221G | 2116 | 3116 |
| CYR10C151J | 2105 | 3105 | CYR10C221J | 2117 | 3117 |
| CYR10C161F | 2106 | 3106 | CYR10C241F | 2118 | 3118 |
| CYR10C161G | 2107 | 3107 | CYR10C241G | 2119 | 3119 |
| CYR10C161J | 2108 | 3108 | CYR10C241J | 2120 | 3120 |
| CYR10C181F | 2109 | 3109 | CYR10C271F | 2121 | 3121 |
| CYR10C181G | 2110 | 3110 | CYR10C271G | 2122 | 3122 |
| CYR10C181J | 2111 | 3111 | CYR10C271J | 2123 | 3123 |
| CYR10C201F | 2112 | 3112 | CYR10C301F | 2124 | 3124 |
| CYR10C201G | 2113 | 3113 | CYR10C301G | 2125 | 3125 |
| CYR10C201J | 2114 | 3114 | CYR10C301J | 2126 | 3126 |

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-F201-1)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-713-144/406



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.