
MILITARY SPECIFICATION SHEET

# CAPACITORS, FIXED, GLASS DIELECTRIC, (AXIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLE CYR10

Ⓔ FAILURE RATE LEVEL 'L' IS INACTIVE FOR DESIGN AFTER 20 July 1983.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-23269.

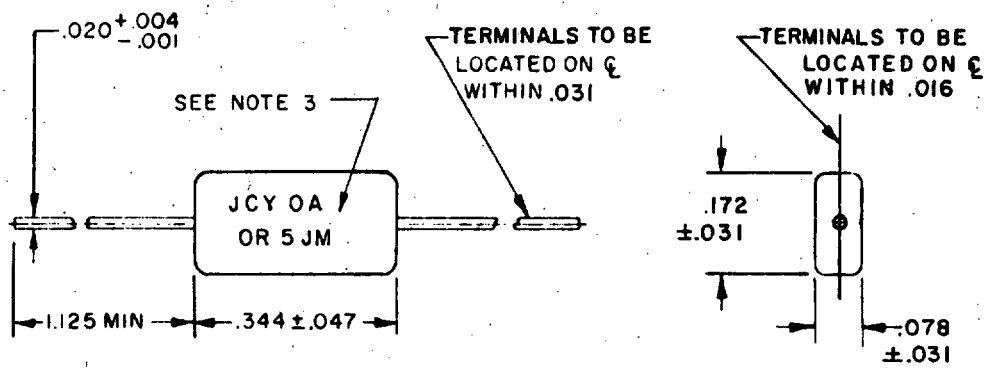


| INCHES | MM |
|---|---|
| .001 | .03 |
| .004 | .10 |
| .016 | .41 |
| .020 | .51 |
| .031 | .79 |
| .047 | 1.19 |
| .078 | 1.98 |
| .172 | 4.37 |
| .344 | 8.74 |
| 1.125 | 28.58 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. See marking requirement.

FIGURE 1. Dimensions and configurations.

Ⓕ denotes changes


FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Glass.

Terminals: Axial wire-lead; solder coated, copper-clad, nickel-iron core (46 percent nickel, 54 percent iron).

Capacitance (nominal): See table I.

Capacitance tolerance: See table I.

Rated voltage: See table I.

Failure rate level: L, M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 140 ±25 parts/million/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test I.

Insulation resistance: 10,000 megohms or 200 ohm-farads minimum (qualification inspection only at +125°C). 100,000 megohms minimum (at +25°C).

Dissipation factor (DF): 0.1 percent maximum.

Thermal shock and moisture resistance:

DF: 0.1 percent maximum.

Quality factor (Q): In accordance with MIL-C-23269.

Life:

ΔCapacitance (240 hour and 2,000 hour): 0.5 percent or 0.5 pF maximum.

DF (240 hour and 2,000 hour): 0.15 percent maximum.

Marking: "J" Brand; Capacitor indicator; Dielectric indicator; Last digit of year code; Sequential 4-week lot code

| "J" Brand | Capacitor indicator | Dielectric indicator | Last digit of year code | Sequential 4-week lot code |
|---|---|---|---|---|
| J | C | Y | 0 | A |
| 0 | R | 5 | J | M |
| Capacitance code | | | Capacitance tolerance code | Failure rate level code (%/1,000 hrs) |

Capacitance tolerance code:

C = ±0.25 pF
D = ±0.5 pF
F = ±1 percent
G = ±2 percent
J = ±5 percent

Failure rate level code (%/1,000 hrs):

L = 2.0
M = 1.0
P = 0.1
R = 0.01
S = 0.001

Substitutability data: See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

| Capacitance | Capacitance tolerance | Dash number M23269/01- FR level in percent/1,000 hours | | | | | |
|---|---|---|---|---|---|---|---|
| | | 500 V dc | | | | | 100 V dc |
| | | L (2.0) | M (1.0) | P (0.1) | R(0.01) | S (0.001) | S (0.001)1/ |
| (pF) | | | | | | | |
| 0.5 | ±0.25 pF | 2001 | 3001 | 4001 | 5001 | 6001 | 7001 |
| 1.0 | ±0.25 pF | 2002 | 3002 | 4002 | 5002 | 6002 | 7002 |
| 1.5 | ±0.25 pF | 2003 | 3003 | 4003 | 5003 | 6003 | 7003 |
| 2.2 | ±0.25 pF | 2004 | 3004 | 4004 | 5004 | 6004 | 7004 |
| 2.2 | ±0.50 pF | 2005 | 3005 | 4005 | 5005 | 6005 | 7005 |
| 2.7 | ±0.25 pF | 2006 | 3006 | 4006 | 5006 | 6006 | 7006 |
| 3.0 | ±0.25 pF | 2007 | 3007 | 4007 | 5007 | 6007 | 7007 |
| 3.0 | ±0.50 pF | 2008 | 3008 | 4008 | 5008 | 6008 | 7008 |
| 3.3 | ±0.25 pF | 2009 | 3009 | 4009 | 5009 | 6009 | 7009 |
| 3.6 | ±0.25 pF | 2010 | 3010 | 4010 | 5010 | 6010 | 7010 |
| 3.6 | ±0.50 pF | 2011 | 3011 | 4011 | 5011 | 6011 | 7011 |
| 3.9 | ±0.25 pF | 2012 | 3012 | 4012 | 5012 | 6012 | 7012 |
| 4.3 | ±0.25 pF | 2013 | 3013 | 4013 | 5013 | 6013 | 7013 |
| 4.3 | ±0.50 pF | 2014 | 3014 | 4014 | 5014 | 6014 | 7014 |
| 4.7 | ±0.25 pF | 2015 | 3015 | 4015 | 5015 | 6015 | 7015 |
| 5.1 | ±0.25 pF | 2016 | 3016 | 4016 | 5016 | 6016 | 7016 |
| 5.6 | ±0.25 pF | 2017 | 3017 | 4017 | 5017 | 6017 | 7017 |
| 5.6 | ±5% | 2018 | 3018 | 4018 | 5018 | 6018 | 7018 |
| 6.2 | ±0.25 pF | 2019 | 3019 | 4019 | 5019 | 6019 | 7019 |
| 6.2 | ±5% | 2020 | 3020 | 4020 | 5020 | 6020 | 7020 |
| 6.8 | ±0.25 pF | 2021 | 3021 | 4021 | 5021 | 6021 | 7021 |
| 6.8 | ±5% | 2022 | 3022 | 4022 | 5022 | 6022 | 7022 |
| 7.5 | ±0.25 pF | 2023 | 3023 | 4023 | 5023 | 6023 | 7023 |
| 7.5 | ±5% | 2024 | 3024 | 4024 | 5024 | 6024 | 7024 |
| 8.2 | ±0.25 pF | 2025 | 3025 | 4025 | 5025 | 6025 | 7025 |
| 8.2 | ±5% | 2026 | 3026 | 4026 | 5026 | 6026 | 7026 |
| 9.1 | ±0.25 pF | 2027 | 3027 | 4027 | 5027 | 6027 | 7027 |
| 9.1 | ±5% | 2028 | 3028 | 4028 | 5028 | 6028 | 7028 |
| 10 | ±0.25 pF | 2029 | 3029 | 4029 | 5029 | 6029 | 7029 |
| 10 | ±5% | 2030 | 3030 | 4030 | 5030 | 6030 | 7030 |
| 11 | ±0.25 pF | 2031 | 3031 | 4031 | 5031 | 6031 | 7031 |
| 11 | ±5% | 2032 | 3032 | 4032 | 5032 | 6032 | 7032 |
| 12 | ±0.25 pF | 2033 | 3033 | 4033 | 5033 | 6033 | 7033 |
| 12 | ±5% | 2034 | 3034 | 4034 | 5034 | 6034 | 7034 |
| 13 | ±2% | 2035 | 3035 | 4035 | 5035 | 6035 | 7035 |
| 13 | ±5% | 2036 | 3036 | 4036 | 5036 | 6036 | 7036 |
| 15 | ±2% | 2037 | 3037 | 4037 | 5037 | 6037 | 7037 |
| 15 | ±5% | 2038 | 3038 | 4038 | 5038 | 6038 | 7038 |
| 16 | ±2% | 2039 | 3039 | 4039 | 5039 | 6039 | 7039 |
| 16 | ±5% | 2040 | 3040 | 4040 | 5040 | 6040 | 7040 |
| 18 | ±2% | 2041 | 3041 | 4041 | 5041 | 6041 | 7041 |
| 18 | ±5% | 2042 | 3042 | 4042 | 5042 | 6042 | 7042 |
| 20 | ±2% | 2043 | 3043 | 4043 | 5043 | 6043 | 7043 |
| 20 | ±5% | 2044 | 3044 | 4044 | 5044 | 6044 | 7044 |
| 22 | ±2% | 2045 | 3045 | 4045 | 5045 | 6045 | 7045 |
| 22 | ±5% | 2046 | 3046 | 4046 | 5046 | 6046 | 7046 |
| 24 | ±2% | 2047 | 3047 | 4047 | 5047 | 6047 | 7047 |
| 24 | ±5% | 2048 | 3048 | 4048 | 5048 | 6048 | 7048 |
| 27 | ±1% | 2049 | 3049 | 4049 | 5049 | 6049 | 7049 |
| 27 | ±2% | 2050 | 3050 | 4050 | 5050 | 6050 | 7050 |
| 27 | ±5% | 2051 | 3051 | 4051 | 5051 | 6051 | 7051 |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers - Continued.

| Capacitance | Capacitance tolerance | Dash number M23269/01- FR level in percent/1,000 hours | | | | | |
|---|---|---|---|---|---|---|---|
| | | 500 V dc | | | | | 100 V dc |
| | | L (2.0) | M (1.0) | P (0.1) | R(0.01) | S (0.001) | S (0.001) 1/ |
| (pF) | | | | | | | |
| 30 | ±1% | 2052 | 3052 | 4052 | 5052 | 6052 | 7052 |
| 30 | ±2% | 2053 | 3053 | 4053 | 5053 | 6053 | 7053 |
| 30 | ±5% | 2054 | 3054 | 4054 | 5054 | 6054 | 7054 |
| 33 | ±1% | 2055 | 3055 | 4055 | 5055 | 6055 | 7055 |
| 33 | ±2% | 2056 | 3056 | 4056 | 5056 | 6056 | 7056 |
| 33 | ±5% | 2057 | 3057 | 4057 | 5057 | 6057 | 7057 |
| 36 | ±1% | 2058 | 3058 | 4058 | 5058 | 6058 | 7058 |
| 36 | ±2% | 2059 | 3059 | 4059 | 5059 | 6059 | 7059 |
| 36 | ±5% | 2060 | 3060 | 4060 | 5060 | 6060 | 7060 |
| 39 | ±1% | 2061 | 3061 | 4061 | 5061 | 6061 | 7061 |
| 39 | ±2% | 2062 | 3062 | 4062 | 5062 | 6062 | 7062 |
| 39 | ±5% | 2063 | 3063 | 4063 | 5063 | 6063 | 7063 |
| 43 | ±1% | 2064 | 3064 | 4064 | 5064 | 6064 | 7064 |
| 43 | ±2% | 2065 | 3065 | 4065 | 5065 | 6065 | 7065 |
| 43 | ±5% | 2066 | 3066 | 4066 | 5066 | 6066 | 7066 |
| 47 | ±1% | 2067 | 3067 | 4067 | 5067 | 6067 | 7067 |
| 47 | ±2% | 2068 | 3068 | 4068 | 5068 | 6068 | 7068 |
| 47 | ±5% | 2069 | 3069 | 4069 | 5069 | 6069 | 7069 |
| 51 | ±1% | 2070 | 3070 | 4070 | 5070 | 6070 | 7070 |
| 51 | ±2% | 2071 | 3071 | 4071 | 5071 | 6071 | 7071 |
| 51 | ±5% | 2072 | 3072 | 4072 | 5072 | 6072 | 7072 |
| 56 | ±1% | 2073 | 3073 | 4073 | 5073 | 6073 | 7073 |
| 56 | ±2% | 2074 | 3074 | 4074 | 5074 | 6074 | 7074 |
| 56 | ±5% | 2075 | 3075 | 4075 | 5075 | 6075 | 7075 |
| 62 | ±1% | 2076 | 3076 | 4076 | 5076 | 6076 | 7076 |
| 62 | ±2% | 2077 | 3077 | 4077 | 5077 | 6077 | 7077 |
| 62 | ±5% | 2078 | 3078 | 4078 | 5078 | 6078 | 7078 |
| 68 | ±1% | 2079 | 3079 | 4079 | 5079 | 6079 | 7079 |
| 68 | ±2% | 2080 | 3080 | 4080 | 5080 | 6080 | 7080 |
| 68 | ±5% | 2081 | 3081 | 4081 | 5081 | 6081 | 7081 |
| 75 | ±1% | 2082 | 3082 | 4082 | 5082 | 6082 | 7082 |
| 75 | ±2% | 2083 | 3083 | 4083 | 5083 | 6083 | 7083 |
| 75 | ±5% | 2084 | 3084 | 4084 | 5084 | 6084 | 7084 |
| 82 | ±1% | 2085 | 3085 | 4085 | 5085 | 6085 | 7085 |
| 82 | ±2% | 2086 | 3086 | 4086 | 5086 | 6086 | 7086 |
| 82 | ±5% | 2087 | 3087 | 4087 | 5087 | 6087 | 7087 |
| 91 | ±1% | 2088 | 3088 | 4088 | 5088 | 6088 | 7088 |
| 91 | ±2% | 2089 | 3089 | 4089 | 5089 | 6089 | 7089 |
| 91 | ±5% | 2090 | 3090 | 4090 | 5090 | 6090 | 7090 |
| 100 | ±1% | 2091 | 3091 | 4091 | 5091 | 6091 | 7091 |
| 100 | ±2% | 2092 | 3092 | 4092 | 5092 | 6092 | 7092 |
| 100 | ±5% | 2093 | 3093 | 4093 | 5093 | 6093 | 7093 |
| 110 | ±1% | 2094 | 3094 | 4094 | 5094 | 6094 | 7094 |
| 110 | ±2% | 2095 | 3095 | 4095 | 5095 | 6095 | 7095 |
| 110 | ±5% | 2096 | 3096 | 4096 | 5096 | 6096 | 7096 |
| 120 | ±1% | 2097 | 3097 | 4097 | 5097 | 6097 | 7097 |
| 120 | ±2% | 2098 | 3098 | 4098 | 5098 | 6098 | 7098 |
| 120 | ±5% | 2099 | 3099 | 4099 | 5099 | 6099 | 7099 |
| 130 | ±1% | 2100 | 3100 | 4100 | 5100 | 6100 | 7100 |
| 130 | ±2% | 2101 | 3101 | 4101 | 5101 | 6101 | 7101 |
| 130 | ±5% | 2102 | 3102 | 4102 | 5102 | 6102 | 7102 |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers - Continued.

| Capacitance | Capacitance tolerance | Dash number M23269/01- FR level in percent/1,000 hours | | | | | |
|---|---|---|---|---|---|---|---|
| | | 500 V dc | | | | | 100 V dc |
| | | L (2.0) | M (1.0) | P (0.1) | R(0.01) | S (0.001) | S (0.001)1/ |
| (pF) | | | | | | | |
| 150 | ±1% | 2103 | 3103 | 4103 | 5103 | 6103 | 7103 |
| 150 | ±2% | 2104 | 3104 | 4104 | 5104 | 6104 | 7104 |
| 150 | ±5% | 2105 | 3105 | 4105 | 5105 | 6105 | 7105 |
| 160 | ±1% | 2106 | 3106 | 4106 | 5106 | 6106 | 7106 |
| 160 | ±2% | 2107 | 3107 | 4107 | 5107 | 6107 | 7107 |
| 160 | ±5% | 2108 | 3108 | 4108 | 5108 | 6108 | 7108 |
| 180 | ±1% | 2109 | 3109 | 4109 | 5109 | 6109 | 7109 |
| 180 | ±2% | 2110 | 3110 | 4110 | 5110 | 6110 | 7110 |
| 180 | ±5% | 2111 | 3111 | 4111 | 5111 | 6111 | 7111 |
| 200 | ±1% | 2112 | 3112 | 4112 | 5112 | 6112 | 7112 |
| 200 | ±2% | 2113 | 3113 | 4113 | 5113 | 6113 | 7113 |
| 200 | ±5% | 2114 | 3114 | 4114 | 5114 | 6114 | 7114 |
| | | 300 V dc | | | | | 100 V dc |
| 220 | ±1% | 2115 | 3115 | 4115 | 5115 | 6115 | 7115 |
| 220 | ±2% | 2116 | 3116 | 4116 | 5116 | 6116 | 7116 |
| 220 | ±5% | 2117 | 3117 | 4117 | 5117 | 6117 | 7117 |
| 240 | ±1% | 2118 | 3118 | 4118 | 5118 | 6118 | 7118 |
| 240 | ±2% | 2119 | 3119 | 4119 | 5119 | 6119 | 7119 |
| 240 | ±5% | 2120 | 3120 | 4120 | 5120 | 6120 | 7120 |
| 270 | ±1% | 2121 | 3121 | 4121 | 5121 | 6121 | 7221 |
| 270 | ±2% | 2122 | 3122 | 4122 | 5122 | 6122 | 7122 |
| 270 | ±5% | 2123 | 3123 | 4123 | 5123 | 6123 | 7123 |
| 300 | ±1% | 2124 | 3124 | 4124 | 5124 | 6124 | 7124 |
| 300 | ±2% | 2125 | 3125 | 4125 | 5125 | 6125 | 7125 |
| 300 | ±5% | 2126 | 3126 | 4126 | 5126 | 6126 | 7126 |

1/ Sixth power rule applies for derating at 0.5 $\frac{\text{operating}}{\text{rated}}$ voltage ratios and below.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

| Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- FR level in percent/1,000 hours | | Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- FR level in percent/1,000 hours | |
|---|---|---|---|---|---|
| | L (2.0) | M (1.0) | | L (2.0 ) | M (1.0) |
| CYR10C0R5C | 2001 | 3001 | CYR10C300F | 2052 | 3052 |
| CYR10C1R0C | 2002 | 3002 | CYR10C300G | 2053 | 3053 |
| CYR10C1R5C | 2003 | 3003 | CYR10C300J | 2054 | 3054 |
| CYR10C2R2C | 2004 | 3004 | CYR10C330F | 2055 | 3055 |
| CYR10C2R2D | 2005 | 3005 | CYR10C330G | 2056 | 3056 |
| CYR10C2R7C | 2006 | 3006 | CYR10C330J | 2057 | 3057 |
| CYR10C3R0C | 2007 | 3007 | CYR10C360F | 2058 | 3058 |
| CYR10C3R0D | 2008 | 3008 | CYR10C360G | 2059 | 3059 |
| CYR10C3R3C | 2009 | 3009 | CYR10C360J | 2060 | 3060 |
| CYR10C3R6C | 2010 | 3010 | CYR10C390F | 2061 | 3061 |
| CYR10C3R6D | 2011 | 3011 | CYR10C390G | 2062 | 3062 |
| CYR10C3R9C | 2012 | 3012 | CYR10C390J | 2063 | 3063 |
| CYR10C4R3C | 2013 | 3013 | CYR10C430F | 2064 | 3064 |
| CYR10C4R3D | 2014 | 3014 | CYR10C430G | 2065 | 3065 |
| CYR10C4R7C | 2015 | 3015 | CYR10C430J | 2066 | 3066 |
| CYR10C5R1C | 2016 | 3016 | CYR10C470F | 2067 | 3067 |
| CYR10C5R6C | 2017 | 3017 | CYR10C470G | 2068 | 3068 |
| CYR10C5R6J | 2018 | 3018 | CYR10C470J | 2069 | 3069 |
| CYR10C6R2C | 2019 | 3019 | CYR10C510F | 2070 | 3070 |
| CYR10C6R2J | 2020 | 3020 | CYR10C510G | 2071 | 3071 |
| CYR10C6R8C | 2021 | 3021 | CYR10C510J | 2072 | 3072 |
| CYR10C6R8J | 2022 | 3022 | CYR10C560F | 2073 | 3073 |
| CYR10C7R5C | 2023 | 3023 | CYR10C560G | 2074 | 3074 |
| CYR10C7R5J | 2024 | 3024 | CYR10C560J | 2075 | 3075 |
| CYR10C8R2C | 2025 | 3025 | CYR10C620F | 2076 | 3076 |
| CYR10C8R2J | 2026 | 3026 | CYR10C620G | 2077 | 3077 |
| CYR10C9R1C | 2027 | 3027 | CYR10C620J | 2078 | 3078 |
| CYR10C9R1J | 2028 | 3028 | CYR10C680F | 2079 | 3079 |
| CYR10C100C | 2029 | 3029 | CYR10C680G | 2080 | 3080 |
| CYR10C100J | 2030 | 3030 | CYR10C680J | 2081 | 3081 |
| CYR10C110C | 2031 | 3031 | CYR10C750F | 2082 | 3082 |
| CYR10C110J | 2032 | 3032 | CYR10C750G | 2083 | 3083 |
| CYR10C120C | 2033 | 3033 | CYR10C750J | 2084 | 3084 |
| CYR10C120J | 2034 | 3034 | CYR10C820F | 2085 | 3085 |
| CYR10C130G | 2035 | 3035 | CYR10C820G | 2086 | 3086 |
| CYR10C130J | 2036 | 3036 | CYR10C820J | 2087 | 3087 |
| CYR10C150G | 2037 | 3037 | CYR10C910F | 2088 | 3088 |
| CYR10C150J | 2038 | 3038 | CYR10C910G | 2089 | 3089 |
| CYR10C160G | 2039 | 3039 | CYR10C910J | 2090 | 3090 |
| CYR10C160J | 2040 | 3040 | CYR10C101F | 2091 | 3091 |
| CYR10C180G | 2041 | 3041 | CYR10C101G | 2092 | 3092 |
| CYR10C180J | 2042 | 3042 | CYR10C101J | 2093 | 3093 |
| CYR10C200G | 2043 | 3043 | CYR10C111F | 2094 | 3094 |
| CYR10C200J | 2044 | 3044 | CYR10C111G | 2095 | 3095 |
| CYR10C220G | 2045 | 3045 | CYR10C111J | 2096 | 3096 |
| CYR10C220J | 2046 | 3046 | CYR10C121F | 2097 | 3097 |
| CYR10C240G | 2047 | 3047 | CYR10C121G | 2098 | 3098 |
| CYR10C240J | 2048 | 3048 | CYR10C121J | 2099 | 3099 |
| CYR10C270F | 2049 | 3049 | CYR10C131F | 2100 | 3100 |
| CYR10C270G | 2050 | 3050 | CYR10C131G | 2101 | 3101 |
| CYR10C270J | 2051 | 3051 | CYR10C131J | 2102 | 3102 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data - Continued.

| Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- FR level in percent/1,000 hours | | Superseded type designation in MIL-C-23269/1B | Use dash number M23269/01- FR level in percent/1,000 hours | |
|---|---|---|---|---|---|
| | L (2.0) | M (1.0) | | L (2.0 ) | M (1.0) |
| CYR10C151F | 2103 | 3103 | CYR10C221F | 2115 | 3115 |
| CYR10C151G | 2104 | 3104 | CYR10C221G | 2116 | 3116 |
| CYR10C151J | 2105 | 3105 | CYR10C221J | 2117 | 3117 |
| CYR10C161F | 2106 | 3106 | CYR10C241F | 2118 | 3118 |
| CYR10C161G | 2107 | 3107 | CYR10C241G | 2119 | 3119 |
| CYR10C161J | 2108 | 3108 | CYR10C241J | 2120 | 3120 |
| CYR10C181F | 2109 | 3109 | CYR10C271F | 2121 | 3121 |
| CYR10C181G | 2110 | 3110 | CYR10C271G | 2122 | 3122 |
| CYR10C181J | 2111 | 3111 | CYR10C271J | 2123 | 3123 |
| CYR10C201F | 2112 | 3112 | CYR10C301F | 2124 | 3124 |
| CYR10C201G | 2113 | 3113 | CYR10C301G | 2125 | 3125 |
| CYR10C201J | 2114 | 3114 | CYR10C301J | 2126 | 3126 |

Custodians:
Army - ER
Navy - EC
Air Force - 11
NASA - NA

Review activities:
Air Force - 17, 85
DLA - ES
ARMY - AV

User activities:
Navy - MC, CG, AS, OS, SH
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5910-1454-1)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 606-034/3842



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |
| | |

*(TO DETACH THIS FORM, CUT ALONG THIS LINE.)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Department of the Navy
Washington DC 20363

Attn: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.