INCH-POUND
MIL-PRF-23269/1J
15 November 2016
SUPERSEDING
MIL-PRF-23269/1H
31 July 2009


PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, GLASS DIELECTRIC, (AXIAL WIRE-LEAD TERMINALS), STYLE CYR10

Inactive for new design after November 15, 2016

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-23269.

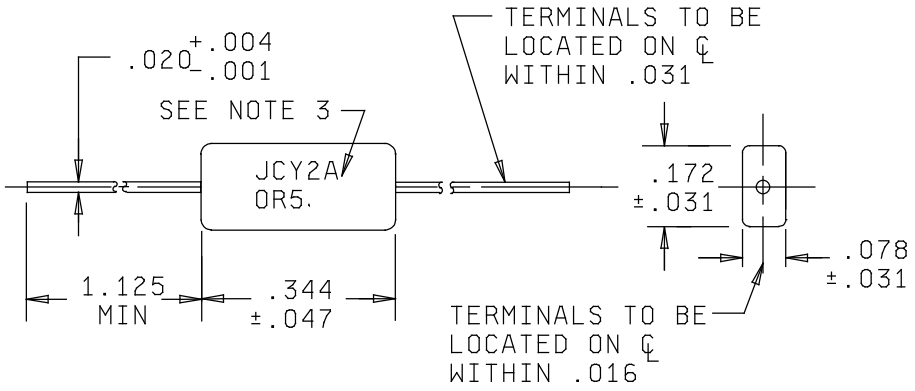

Inches	mm	Inches	mm
.001	0.03	.047	1.19
.004	0.10	.078	1.98
.016	0.41	.172	4.37
.020	0.51	.344	8.74
.031	0.79	1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Glass.

Terminals: Solderable.

Capacitance (nominal): See table I.

Capacitance tolerance: See table I.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 140 parts per million (ppm)/°C ±25 ppm/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test I of MIL-PRF-23269.

Insulation resistance: 10,000 megohms or 200-ohm-farads minimum (first article inspection only at +125°C). 100,000 megohms minimum (at 25°C).

Dissipation factor (DF): 0.1 percent maximum.

Thermal shock and moisture resistance:

DF: 0.1 percent maximum.


Quality factor (Q): In accordance with MIL-PRF-23269.

Life:

ΔCapacitance (240 hours and 1,000 hours): 0.5 percent or 0.5 pF maximum.

DF (240 hours and 1,000 hours): 0.15 percent maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

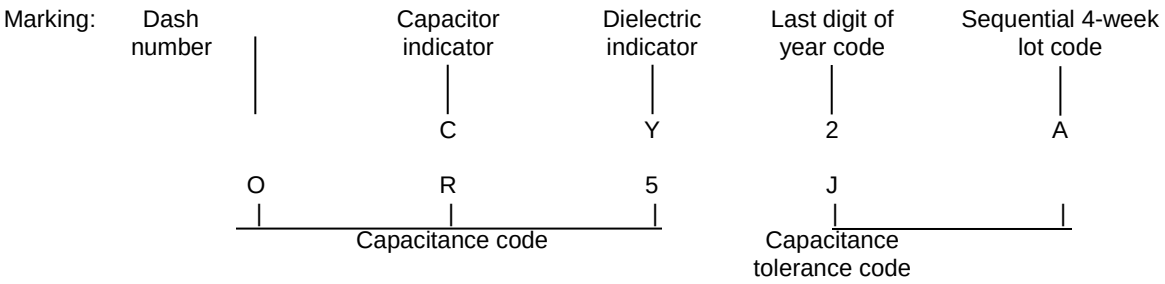

C = ±0.25 pF
D = ±0.5 pF
F = ±1 percent
G = ±2 percent
J = ±5 percent

Substitutability data: See table II.

TABLE I. Electrical and physical characteristics with dash numbers. 1/

Dash number M23269/01-	Capacitance (pF)	Capacitance tolerance	Dash number M23269/01-	Capacitance (pF)	Capacitance tolerance
1001	0.5	±0.25 pF	1027	9.1	±0.25 pF
1002	1.0	±0.25 pF	1028	9.1	±5%
1003	1.5	±0.25 pF	1029	10	±0.25 pF
1004	2.2	±0.25 pF	1030	10	±5%
1005	2.2	±0.50 pF	1031	11	±0.25 pF
1006	2.7	±0.25 pF	1032	11	±5%
1007	3.0	±0.25 pF	1033	12	±0.25 pF
1008	3.0	±0.50 pF	1034	12	±5%
1009	3.3	±0.25 pF	1035	13	±2%
1010	3.6	±0.25 pF	1036	13	±5%
1011	3.6	±0.50 pF	1037	15	±2%
1012	3.9	±0.25 pF	1038	15	±5%
1013	4.3	±0.25 pF	1039	16	±2%
1014	4.3	±0.50 pF	1040	16	±5%
1015	4.7	±0.25 pF	1041	18	±2%
1016	5.1	±0.25 pF	1042	18	±5%
1017	5.6	±0.25 pF	1043	20	±2%
1018	5.6	±5%	1044	20	±5%
1019	6.2	±0.25 pF	1045	22	±2%
1020	6.2	±5%	1046	22	±5%
1021	6.8	±0.25 pF	1047	24	±2%
1022	6.8	±5%	1048	24	±5%
1023	7.5	±0.25 pF	1049	27	±1%
1024	7.5	±5%	1050	27	±2%
1025	8.2	±0.25 pF	1051	27	±5%
1026	8.2	±5%	1052	30	±1%

See footnote at end of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics with dash numbers. – Continued. 1/

Dash number M23269/01-	Capacitance (pF)	Capacitance tolerance	Dash number M23269/01-	Capacitance (pF)	Capacitance tolerance
1053	30	±2%	1090	91	±5%
1054	30	±5%	1091	100	±1%
1055	33	±1%	1092	100	±2%
1056	33	±2%	1093	100	±5%
1057	33	±5%	1094	110	±1%
1058	36	±1%	1095	110	±2%
1059	36	±2%	1096	110	±5%
1060	36	±5%	1097	120	±1%
1061	39	±1%	1098	120	±2%
1062	39	±2%	1099	120	±5%
1063	39	±5%	1100	130	±1%
1064	43	±1%	1101	130	±2%
1065	43	±2%	1102	130	±5%
1066	43	±5%	1103	150	±1%
1067	47	±1%	1104	150	±2%
1068	47	±2%	1105	150	±5%
1069	47	±5%	1106	160	±1%
1070	51	±1%	1107	160	±2%
1071	51	±2%	1108	160	±5%
1072	51	±5%	1109	180	±1%
1073	56	±1%	1110	180	±2%
1074	56	±2%	1111	180	±5%
1075	56	±5%	1112	200	±1%
1076	62	±1%	1113	200	±2%
1077	62	±2%	1114	200	±5%
1078	62	±5%	1115	220	±1%
1079	68	±1%	1116	220	±2%
1080	68	±2%	1117	220	±5%
1081	68	±5%	1118	240	±1%
1082	75	±1%	1119	240	±2%
1083	75	±2%	1120	240	±5%
1084	75	±5%	1121	270	±1%
1085	82	±1%	1122	270	±2%
1086	82	±2%	1123	270	±5%
1087	82	±5%	1124	300	±1%
1088	91	±1%	1125	300	±2%
1089	91	±2%	1126	300	±5%

1/ dash numbers are non-established reliability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data. 1/

Superseding Dash number M23269/01-	Superseded type designation in MIL-C-23269/1B	Dash number M23269/01- FRL in percent/1,000 hours					
		Use dash number M23269/01- in M23269/1C through /1H					
		L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)	S (0.001) 2/
1001	CYR10C0R5C	2001	3001	4001	5001	6001	7001
1002	CYR10C1R0C	2002	3002	4002	5002	6002	7002
1003	CYR10C1R5C	2003	3003	4003	5003	6003	7003
1004	CYR10C2R2C	2004	3004	4004	5004	6004	7004
1005	CYR10C2R2D	2005	3005	4005	5005	6005	7005
1006	CYR10C2R7C	2006	3006	4006	5006	6006	7006
1007	CYR10C3R0C	2007	3007	4007	5007	6007	7007
1008	CYR10C3R0D	2008	3008	4008	5008	6008	7008
1009	CYR10C3R3C	2009	3009	4009	5009	6009	7009
1010	CYR10C3R6C	2010	3010	4010	5010	6010	7010
1011	CYR10C3R6D	2011	3011	4011	5011	6011	7011
1012	CYR10C3R9C	2012	3012	4012	5012	6012	7012
1013	CYR10C4R3C	2013	3013	4013	5013	6013	7013
1014	CYR10C4R3D	2014	3014	4014	5014	6014	7014
1015	CYR10C4R7C	2015	3015	4015	5015	6015	7015
1016	CYR10C5R1C	2016	3016	4016	5016	6016	7016
1017	CYR10C5R6C	2017	3017	4017	5017	6017	7017
1018	CYR10C5R6J	2018	3018	4018	5018	6018	7018
1019	CYR10C6R2C	2019	3019	4019	5019	6019	7019
1020	CYR10C6R2J	2020	3020	4020	5020	6020	7020
1021	CYR10C6R8C	2021	3021	4021	5021	6021	7021
1022	CYR10C6R8J	2022	3022	4022	5022	6022	7022
1023	CYR10C7R5C	2023	3023	4023	5023	6023	7023
1024	CYR10C7R5J	2024	3024	4024	5024	6024	7024
1025	CYR10C8R2C	2025	3025	4025	5025	6025	7025
1026	CYR10C8R2J	2026	3026	4026	5026	6026	7026

See footnote at end of table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data. – Continued. 1/

Superseding Dash number M23269/01-	Superseded type designation in MIL-C-23269/1B	Dash number M23269/01- FRL in percent/1,000 hours					
		Use dash number M23269/01- in M23269/1C through /1H					
		L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)	S (0.001) 2/
1027	CYR10C9R1C	2027	3027	4027	5027	6027	7027
1028	CYR10C9R1J	2028	3028	4028	5028	6028	7028
1029	CYR10C100C	2029	3029	4029	5029	6029	7029
1030	CYR10C100J	2030	3030	4030	5030	6030	7030
1031	CYR10C110C	2031	3031	4031	5031	6031	7031
1032	CYR10C110J	2032	3032	4032	5032	6032	7032
1033	CYR10C120C	2033	3033	4033	5033	6033	7033
1034	CYR10C120J	2034	3034	4034	5034	6034	7034
1035	CYR10C130G	2035	3035	4035	5035	6035	7035
1036	CYR10C130J	2036	3036	4036	5036	6036	7036
1037	CYR10C150G	2037	3037	4037	5037	6037	7037
1038	CYR10C150J	2038	3038	4038	5038	6038	7038
1039	CYR10C160G	2039	3039	4039	5039	6039	7039
1040	CYR10C160J	2040	3040	4040	5040	6040	7040
1041	CYR10C180G	2041	3041	4041	5041	6041	7041
1042	CYR10C180J	2042	3042	4042	5042	6042	7042
1043	CYR10C200G	2043	3043	4043	5043	6043	7043
1044	CYR10C200J	2044	3044	4044	5044	6044	7044
1045	CYR10C220G	2045	3045	4045	5045	6045	7045
1046	CYR10C220J	2046	3046	4046	5046	6046	7046
1047	CYR10C240G	2047	3047	4047	5047	6047	7047
1048	CYR10C240J	2048	3048	4048	5048	6048	7048
1049	CYR10C270F	2049	3049	4049	5049	6049	7049
1050	CYR10C270G	2050	3050	4050	5050	6050	7050
1051	CYR10C270J	2051	3051	4051	5051	6051	7051
1052	CYR10C300F	2052	3052	4052	5052	6052	7052
1053	CYR10C300G	2053	3053	4053	5053	6053	7053
1054	CYR10C300J	2054	3054	4054	5054	6054	7054
1055	CYR10C330F	2055	3055	4055	5055	6055	7055
1056	CYR10C330G	2056	3056	4056	5056	6056	7056
1057	CYR10C330J	2057	3057	4057	5057	6057	7057
1058	CYR10C360F	2058	3058	4058	5058	6058	7058
1059	CYR10C360G	2059	3059	4059	5059	6059	7059
1060	CYR10C360J	2060	3060	4060	5060	6060	7060
1061	CYR10C390F	2061	3061	4061	5061	6061	7061
1062	CYR10C390G	2062	3062	4062	5062	6062	7062
1063	CYR10C390J	2063	3063	4063	5063	6063	7063
1064	CYR10C430F	2064	3064	4064	5064	6064	7064
1065	CYR10C430G	2065	3065	4065	5065	6065	7065
1066	CYR10C430J	2066	3066	4066	5066	6066	7066
1067	CYR10C470F	2067	3067	4067	5067	6067	7067
1068	CYR10C470G	2068	3068	4068	5068	6068	7068
1069	CYR10C470J	2069	3069	4069	5069	6069	7069

See footnote at end of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

TABLE II Substitutability data. – Continued. 1/

Superseding Dash number M23269/01-	Superseded type designation in MIL-C-23269/1B	Dash number M23269/01- FRL in percent/1,000 hours					
		Use dash number M23269/01- in M23269/1C through /1H					
		L(2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)	S (0.001) 2/
1070	CYR10C510F	2070	3070	4070	5070	6070	7070
1071	CYR10C510G	2071	3071	4071	5071	6071	7071
1072	CYR10C510J	2072	3072	4072	5072	6072	7072
1073	CYR10C560F	2073	3073	4073	5073	6073	7073
1074	CYR10C560G	2074	3074	4074	5074	6074	7074
1075	CYR10C560J	2075	3075	4075	5075	6075	7075
1076	CYR10C620F	2076	3076	4076	5076	6076	7076
1077	CYR10C620G	2077	3077	4077	5077	6077	7077
1078	CYR10C620J	2078	3078	4078	5078	6078	7078
1079	CYR10C680F	2079	3079	4079	5079	6079	7079
1080	CYR10C680G	2080	3080	4080	5080	6080	7080
1081	CYR10C680J	2081	3081	4081	5081	6081	7081
1082	CYR10C750F	2082	3082	4082	5082	6082	7082
1083	CYR10C750G	2083	3083	4083	5083	6083	7083
1084	CYR10C750J	2084	3084	4084	5084	6084	7084
1085	CYR10C820F	2085	3085	4085	5085	6085	7085
1086	CYR10C820G	2086	3086	4086	5086	6086	7086
1087	CYR10C820J	2087	3087	4087	5087	6087	7087
1088	CYR10C910F	2088	3088	4088	5088	6088	7088
1089	CYR10C910G	2089	3089	4089	5089	6089	7089
1090	CYR10C910J	2090	3090	4090	5090	6090	7090
1091	CYR10C101F	2091	3091	4091	5091	6091	7091
1092	CYR10C101G	2092	3092	4092	5092	6092	7092
1093	CYR10C101J	2093	3093	4093	5093	6093	7093
1094	CYR10C111F	2094	3094	4094	5094	6094	7094
1095	CYR10C111G	2095	3095	4095	5095	6095	7095
1096	CYR10C111J	2096	3096	4096	5096	6096	7096
1097	CYR10C121F	2097	3097	4097	5097	6097	7097
1098	CYR10C121G	2098	3098	4098	5098	6098	7098
1099	CYR10C121J	2099	3099	4099	5099	6099	7099
1100	CYR10C131F	2100	3100	4100	5100	6100	7100
1101	CYR10C131G	2101	3101	4101	5101	6101	7101
1102	CYR10C131J	2102	3102	4102	5102	6102	7102
1103	CYR10C151F	2103	3103	4103	5103	6103	7103
1104	CYR10C151G	2104	3104	4104	5104	6104	7104
1105	CYR10C151J	2105	3105	4105	5105	6105	7105
1106	CYR10C161F	2106	3106	4106	5106	6106	7106
1107	CYR10C161G	2107	3107	4107	5107	6107	7107
1108	CYR10C161J	2108	3108	4108	5108	6108	7108
1109	CYR10C181F	2109	3109	4109	5109	6109	7109
1110	CYR10C181G	2110	3110	4110	5110	6110	7110
1111	CYR10C181J	2111	3111	4111	5111	6111	7111
1112	CYR10C201F	2112	3112	4112	5112	6112	7112
1113	CYR10C201G	2113	3113	4113	5113	6113	7113
1114	CYR10C201J	2114	3114	4114	5114	6114	7114

See footnote at end of table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

TABLE II Substitutability data. – Continued. 1/

Superseding Dash number M23269/01-	Superseded type designation in MIL-C-23269/1B	Dash number M23269/01- FRL in percent/1,000 hours					
		Use dash number M23269/01- in M23269/1C through /1H					
		L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)	S (0.001) 2/
1115	CYR10C221F	2115	3115	4115	5115	6115	7115
1116	CYR10C221G	2116	3116	4116	5116	6116	7116
1117	CYR10C221J	2117	3117	4117	5117	6117	7117
1118	CYR10C241F	2118	3118	4118	5118	6118	7118
1119	CYR10C241G	2119	3119	4119	5119	6119	7119
1120	CYR10C241J	2120	3120	4120	5120	6120	7120
1121	CYR10C271F	2121	3121	4121	5121	6121	7121
1122	CYR10C271G	2122	3122	4122	5122	6122	7122
1123	CYR10C271J	2123	3123	4123	5123	6123	7123
1124	CYR10C301F	2124	3124	4124	5124	6124	7124
1125	CYR10C301G	2125	3125	4125	5125	6125	7125
1126	CYR10C301J	2126	3126	4126	5126	6126	7126

1/ Users are cautioned to evaluate this document for their particular application before citing the superseding dash numbers since the L, M, P, R, S failure rate levels (FRL) established in accordance with MIL-STD-690 are no longer available.

2/ Sixth power rule applies for derating at 0.5 operating/rated voltage ratios and below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.

Referenced documents: This specification sheet only references MIL-PRF-23269.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2016-036)

Review activities:
Navy - AS, MC, OS, SH
Air Force - 19, 99
Other DoD - MDA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:11Z
Check the source to verify that this is the current version before use.