INCH-POUND
MIL-PRF-23269/2G
10 June 1999
SUPERSEDING
MIL-C-23269/2F
4 February 1993

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC,
(AXIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY,
STYLE CYR15

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-23269.

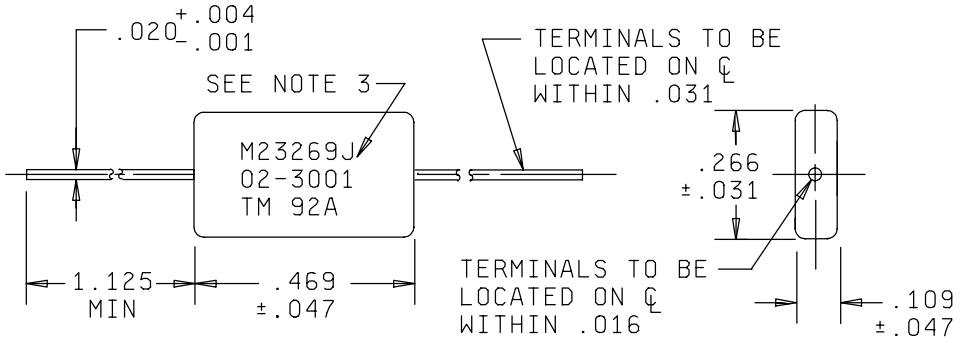


| Inches | mm | Inches | mm |
|---|---|---|---|
| .001 | 0.03 | .047 | 1.19 |
| .004 | 0.10 | .109 | 2.77 |
| .016 | 0.41 | .266 | 6.76 |
| .020 | 0.51 | .469 | 11.91 |
| .031 | 0.79 | 1.125 | 28.58 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 1. Dimensions and configurations.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Glass.

Terminals: Solderable.

Capacitance (nominal): See table I.

Capacitance tolerance: See table I.

Rated voltage: See table I.

Failure rate level: M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 140 parts per million (ppm)/°C ±25 ppm/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test I.

Insulation resistance: 10,000 megohms or 200-ohm-farads minimum (qualification inspection only at +125°C). 100,000 megohms minimum (at 25°C).

Dissipation factor (DF): 0.1 percent maximum.

Thermal shock and moisture resistance:

DF: 0.1 percent maximum.

Quality factor (Q): In accordance with MIL-PRF-23269.

Life:

ΔCapacitance (240 hours and 2,000 hours): 0.5 percent maximum.

DF (240 hours and 2,000 hours): 0.15 percent maximum.

Marking: "M" Part or Identifying Number (PIN) "J" Brand in lieu of slash

M23269
02-3001
TM 92

J

A

Trademark | Year code | Sequential 4 week lot code

Substitutability data: See table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/02- FRL in percent/1,000 hours | | | | |
|---|---|---|---|---|---|---|
| | | 500 V dc | | | | 100 V dc |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) | S (0.001) 1/ |
| 220 | ±1% | 3001 | 4001 | 5001 | 6001 | 7001 |
| 220 | ±2% | 3002 | 4002 | 5002 | 6002 | 7002 |
| 220 | ±5% | 3003 | 4003 | 5003 | 6003 | 7003 |
| 240 | ±1% | 3004 | 4004 | 5004 | 6004 | 7004 |
| 240 | ±2% | 3005 | 4005 | 5005 | 6005 | 7005 |
| 240 | ±5% | 3006 | 4006 | 5006 | 6006 | 7006 |
| 270 | ±1% | 3007 | 4007 | 5007 | 6007 | 7007 |
| 270 | ±2% | 3008 | 4008 | 5008 | 6008 | 7008 |
| 270 | ±5% | 3009 | 4009 | 5009 | 6009 | 7009 |
| 300 | ±1% | 3010 | 4010 | 5010 | 6010 | 7010 |
| 300 | ±2% | 3011 | 4011 | 5011 | 6011 | 7011 |
| 300 | ±5% | 3012 | 4012 | 5012 | 6012 | 7012 |
| 330 | ±1% | 3013 | 4013 | 5013 | 6013 | 7013 |
| 330 | ±2% | 3014 | 4014 | 5014 | 6014 | 7014 |
| 330 | ±5% | 3015 | 4015 | 5015 | 6015 | 7015 |
| 360 | ±1% | 3016 | 4016 | 5016 | 6016 | 7016 |
| 360 | ±2% | 3017 | 4017 | 5017 | 6017 | 7017 |
| 360 | ±5% | 3018 | 4018 | 5018 | 6018 | 7018 |
| 390 | ±1% | 3019 | 4019 | 5019 | 6019 | 7019 |
| 390 | ±2% | 3020 | 4020 | 5020 | 6020 | 7020 |
| 390 | ±5% | 3021 | 4021 | 5021 | 6021 | 7021 |
| 430 | ±1% | 3022 | 4022 | 5022 | 6022 | 7022 |
| 430 | ±2% | 3023 | 4023 | 5023 | 6023 | 7023 |
| 430 | ±5% | 3024 | 4024 | 5024 | 6024 | 7024 |
| 470 | ±1% | 3025 | 4025 | 5025 | 6025 | 7025 |
| 470 | ±2% | 3026 | 4026 | 5026 | 6026 | 7026 |
| 470 | ±5% | 3027 | 4027 | 5027 | 6027 | 7027 |
| 510 | ±1% | 3028 | 4028 | 5028 | 6028 | 7028 |
| 510 | ±2% | 3029 | 4029 | 5029 | 6029 | 7029 |
| 510 | ±5% | 3030 | 4030 | 5030 | 6030 | 7030 |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers - Continued.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/02- FRL in percent/1,000 hours | | | | |
|---|---|---|---|---|---|---|
| | | 300 V dc | | | | 100 V dc |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) | S (0.001) 1/ |
| 560 | ±1% | 3031 | 4031 | 5031 | 6031 | 7031 |
| 560 | ±2% | 3032 | 4032 | 5032 | 6032 | 7032 |
| 560 | ±5% | 3033 | 4033 | 5033 | 6033 | 7033 |
| 620 | ±1% | 3034 | 4034 | 5034 | 6034 | 7034 |
| 620 | ±2% | 3035 | 4035 | 5035 | 6035 | 7035 |
| 620 | ±5% | 3036 | 4036 | 5036 | 6036 | 7036 |
| 680 | ±1% | 3037 | 4037 | 5037 | 6037 | 7037 |
| 680 | ±2% | 3038 | 4038 | 5038 | 6038 | 7038 |
| 680 | ±5% | 3039 | 4039 | 5039 | 6039 | 7039 |
| 750 | ±1% | 3040 | 4040 | 5040 | 6040 | 7040 |
| 750 | ±2% | 3041 | 4041 | 5041 | 6041 | 7041 |
| 750 | ±5% | 3042 | 4042 | 5042 | 6042 | 7042 |
| 820 | ±1% | 3043 | 4043 | 5043 | 6043 | 7043 |
| 820 | ±2% | 3044 | 4044 | 5044 | 6044 | 7044 |
| 820 | ±5% | 3045 | 4045 | 5045 | 6045 | 7045 |
| 910 | ±1% | 3046 | 4046 | 5046 | 6046 | 7046 |
| 910 | ±2% | 3047 | 4047 | 5047 | 6047 | 7047 |
| 910 | ±5% | 3048 | 4048 | 5048 | 6048 | 7048 |
| 1,000 | ±1% | 3049 | 4049 | 5049 | 6049 | 7049 |
| 1,000 | ±2% | 3050 | 4050 | 5050 | 6050 | 7050 |
| 1,000 | ±5% | 3051 | 4051 | 5051 | 6051 | 7051 |
| 1,100 | ±1% | 3052 | 4052 | 5052 | 6052 | 7052 |
| 1,100 | ±2% | 3053 | 4053 | 5053 | 6053 | 7053 |
| 1,100 | ±5% | 3054 | 4054 | 5054 | 6054 | 7054 |
| 1,200 | ±1% | 3055 | 4055 | 5055 | 6055 | 7055 |
| 1,200 | ±2% | 3056 | 4056 | 5056 | 6056 | 7056 |
| 1,200 | ±5% | 3057 | 4057 | 5057 | 6057 | 7057 |

1/ Sixth power rule applies for derating at 0.5 $\frac{\text{operating}}{\text{rated}}$ voltage ratios and below.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

| Superseded type designation in MIL-C-23269/2B | Use dash number M23269/02- in M23269/2C through /2F | | Superseded type designation in MIL-C-23269/2B | Use dash number M23269/02- in M23269/2C through /2F | |
|---|---|---|---|---|---|
| | FRL in percent/1,000 hours | | | FRL in percent/1,000 hours | |
| | L (2.0) | M (1.0) | | L (2.0) | M (1.0) |
| CYR15C221F | 2001 | 3001 | CYR15C511J | 2030 | 3030 |
| CYR15C221G | 2002 | 3002 | CYR15C561F | 2031 | 3031 |
| CYR15C221J | 2003 | 3003 | CYR15C561G | 2032 | 3032 |
| CYR15C241F | 2004 | 3004 | CYR15C561J | 2033 | 3033 |
| CYR15C241G | 2005 | 3005 | CYR15C621F | 2034 | 3034 |
| CYR15C241J | 2006 | 3006 | CYR15C621G | 2035 | 3035 |
| CYR15C271F | 2007 | 3007 | CYR15C621J | 2036 | 3036 |
| CYR15C271G | 2008 | 3008 | CYR15C681F | 2037 | 3037 |
| CYR15C271J | 2009 | 3009 | CYR15C681G | 2038 | 3038 |
| CYR15C301F | 2010 | 3010 | CYR15C681J | 2039 | 3039 |
| CYR15C301G | 2011 | 3011 | CYR15C751F | 2040 | 3040 |
| CYR15C301J | 2012 | 3012 | CYR15C751G | 2041 | 3041 |
| CYR15C331F | 2013 | 3013 | CYR15C751J | 2042 | 3042 |
| CYR15C331G | 2014 | 3014 | CYR15C821F | 2043 | 3043 |
| CYR15C331J | 2015 | 3015 | CYR15C821G | 2044 | 3044 |
| CYR15C361F | 2016 | 3016 | CYR15C821J | 2045 | 3045 |
| CYR15C361G | 2017 | 3017 | CYR15C911F | 2046 | 3046 |
| CYR15C361J | 2018 | 3018 | CYR15C911G | 2047 | 3047 |
| CYR15C391F | 2019 | 3019 | CYR15C911J | 2048 | 3048 |
| CYR15C391G | 2020 | 3020 | CYR15C102F | 2049 | 3049 |
| CYR15C391J | 2021 | 3021 | CYR15C102G | 2050 | 3050 |
| CYR15C431F | 2022 | 3022 | CYR15C102J | 2051 | 3051 |
| CYR15C431G | 2023 | 3023 | CYR15C112F | 2052 | 3052 |
| CYR15C431J | 2024 | 3024 | CYR15C112G | 2053 | 3053 |
| CYR15C471F | 2025 | 3025 | CYR15C112J | 2054 | 3054 |
| CYR15C471G | 2026 | 3026 | CYR15C122F | 2055 | 3055 |
| CYR15C471J | 2027 | 3027 | CYR15C122G | 2056 | 3056 |
| CYR15C511F | 2028 | 3028 | CYR15C122J | 2057 | 3057 |
| CYR15C511G | 2029 | 3029 | | | |

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19

Preparing activity:
DLA - CC

(Project 5910-2024-02)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:12Z
Check the source to verify that this is the current version before use.