MIL-C-23269/4E
20 July 1983
SUPERSEDING
MIL-C-0023269/4D(USAF)
15 June 1973 and
MIL-C-23269/4C
30 September 1970


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC, (AXIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLE CYR30

Ⓔ FAILURE RATE LEVEL 'L' IS INACTIVE FOR DESIGN AFTER 20 July 1983.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-23269.

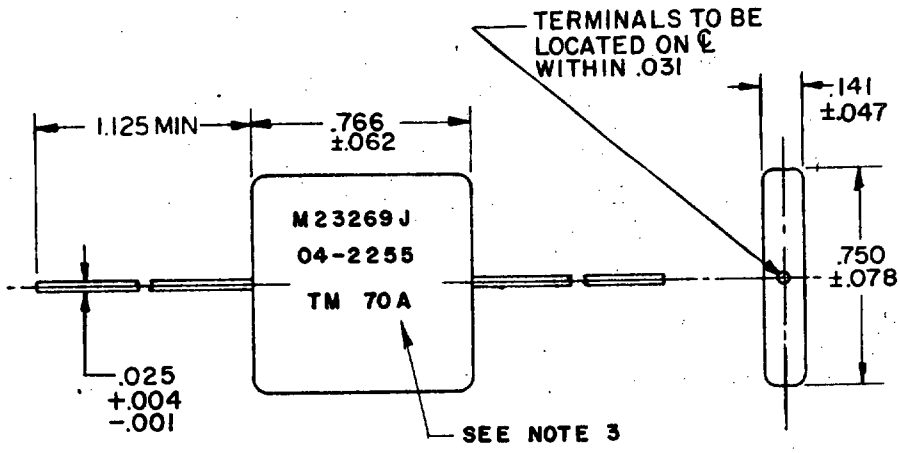

INCHES	MM
.001	.03
.004	.10
.025	.64
.031	.79
.047	1.19
.062	1.57
.078	1.98
.141	3.58
.750	19.05
.766	19.46
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. See marking requirement.

FIGURE 1. Dimensions and configurations.

Ⓔ denotes change.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Glass.

Terminals: Axial wire-lead; solder coated, copper-clad, nickel-iron core (46 percent nickel, 54 percent iron).

Capacitance (nominal): See table I.

Capacitance tolerance: See table I.

Rated voltage: See table I.

Failure rate level: L, M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 140 ±25 parts/million/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Hermetic.

Seal: Test I.

Insulation resistance: 10,000 megohms or 200 ohm-farads minimum (qualification inspection only at +125°C). 100,000 megohms minimum (at +25°C).

Dissipation factor (DF): 0.1 percent maximum.

Thermal shock and moisture resistance:

DF: 0.1 percent maximum.


Quality factor (Q): In accordance with MIL-C-23269.

Life:

ΔCapacitance (240 hour and 2,000 hour): 0.5 percent maximum.

DF (240 hour and 2,000 hour): 0.15 percent maximum.

Marking:

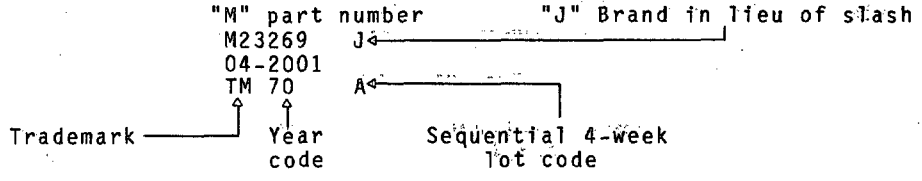

Substitutability data: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:13Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers.

Capacitance	Capacitance tolerance	Dash number M23269/04- FR level in percent/1,000 hours					
		500 V dc					100 V dc
		L (2.0)	M (1.0)	P (0.1)	R (0.01)	S (0.001)	S (0.001) 1/
(pF)							
3.6	±1%	2001	3001	4001	5001	6001	7001
3.6	±2%	2002	3002	4002	5002	6002	7002
3.6	±5%	2003	3003	4003	5003	6003	7003
3.9	±1%	2004	3004	4004	5004	6004	7004
3.9	±2%	2005	3005	4005	5005	6005	7005
3.9	±5%	2006	3006	4006	5006	6006	7006
4.3	±1%	2007	3007	4007	5007	6007	7007
4.3	±2%	2008	3008	4008	5008	6008	7008
4.3	±5%	2009	3009	4009	5009	6009	7009
4.7	±1%	2010	3010	4010	5010	6010	7010
4.7	±2%	2011	3011	4011	5011	6011	7011
4.7	±5%	2012	3012	4012	5012	6012	7012
5.1	±1%	2013	3013	4013	5013	6013	7013
5.1	±2%	2014	3014	4014	5014	6014	7014
5.1	±5%	2015	3015	4015	5015	6015	7015
5.6	±1%	2016	3016	4016	5016	6016	7016
5.6	±2%	2017	3017	4017	5017	6017	7017
5.6	±5%	2018	3018	4018	5018	6018	7018
6.2	±1%	2019	3019	4019	5019	6019	7019
6.2	±2%	2020	3020	4020	5020	6020	7020
6.2	±5%	2021	3021	4021	5021	6021	7021
		300 V dc					100 V dc
6.8	±1%	2022	3022	4022	5022	6022	7022
6.8	±2%	2023	3023	4023	5023	6023	7023
6.8	±5%	2024	3024	4024	5024	6024	7024
7.5	±1%	2025	3025	4025	5025	6025	7025
7.5	±2%	2026	3026	4026	5026	6026	7026
7.5	±5%	2027	3027	4027	5027	6027	7027
8.2	±1%	2028	3028	4028	5028	6028	7028
8.2	±2%	2029	3029	4029	5029	6029	7029
8.2	±5%	2030	3030	4030	5030	6030	7030
9.1	±1%	2031	3031	4031	5031	6031	7031
9.1	±2%	2032	3032	4032	5032	6032	7032
9.1	±5%	2033	3033	4033	5033	6033	7033
10.0	±1%	2034	3034	4034	5034	6034	7034
10.0	±2%	2035	3035	4035	5035	6035	7035
10.0	±5%	2036	3036	4036	5036	6036	7036

1/ Sixth power rule applies for derating at 0.5 $\frac{\text{operating}}{\text{rated}}$ voltage ratios and below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:13Z
Check the source to verify that this is the current version before use.

TABLE II. Substitutability data.

Superseded type designation in MIL-C-23269/4B	Use dash number M23269/04- FR level in percent/1,000 hours		Superseded type designation in MIL-C-23269/4B	Use dash number M23269/04- FR level in percent/1,000 hours	
	L (2.0)	M (1.0)		L (2.0)	M (1.0)
CYR30C362F	2001	3001	CYR30C622F	2019	3019
CYR30C362G	2002	3002	CYR30C622G	2020	3020
CYR30C362J	2003	3003	CYR30C622J	2021	3021
CYR30C392F	2004	3004	CYR30C682F	2022	3022
CYR30C392G	2005	3005	CYR30C682G	2023	3023
CYR30C392J	2006	3006	CYR30C682J	2024	3024
CYR30C432F	2007	3007	CYR30C752F	2025	3025
CYR30C432G	2008	3008	CYR30C752G	2026	3026
CYR30C432J	2009	3009	CYR30C752J	2027	3027
CYR30C472F	2010	3010	CYR30C822F	2028	3028
CYR30C472G	2011	3011	CYR30C822G	2029	3029
CYR30C472J	2012	3012	CYR30C822J	2030	3030
CYR30C512F	2013	3013	CYR30C912F	2031	3031
CYR30C512G	2014	3014	CYR30C912G	2032	3032
CYR30C512J	2015	3015	CYR30C912J	2033	3033
CYR30C562F	2016	3016	CYR30C103F	2034	3034
CYR30C562G	2017	3017	CYR30C103G	2035	3035
CYR30C562J	2018	3018	CYR30C103J	2036	3036

Custodians:
Army - ER
Navy - EC
Air Force - 11
NASA - NA

Review activities:
Air Force - 17, 85
DLA - ES
ARMY - AV

User activities:
Navy - MC, CG, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5910-1454-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department OF THE Navy
Washington, DC 20363

Attn: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:13Z
Check the source to verify that this is the current version before use.