[INCH-POUND]
A-A-55559/2
August 31, 1995


COMMERCIAL ITEM DESCRIPTION

TAPE, ELECTRONIC DATA PROCESSING, UNFORMATTED, 6.35 MILLIMETER (MM) (.25 INCH (IN)) WIDE, IN A 3.5-INCH FORM FACTOR MINICARTRIDGE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a 6.35 mm (.25 inch) wide electronic data processing tape in a 3.5-inch form factor minicartridge. Electronic data processing tapes covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

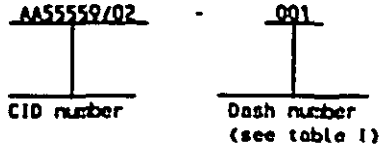

3. SALIENT CHARACTERISTICS

3.1 Design and construction. Electronic data processing tape supplied to this CID shall be as specified herein, and meet the corresponding industry standard specified in table I.

3.2 Overall cartridge dimensions. The cartridge dimensions shall be 80.98 ±0.13 mm (3.188 inches ±.005 inch) long x 61.11 ±0.13 mm (2.406 inches ±.005 inch) wide x 14.73 ±0.13 mm (.580 inch ±.005 inch) high.

3.3 Tape width and tolerance. The tape width and tolerance shall be 6.274 ±.013 mm (.2470 inch ±.0005 inch.

3.4 Tape length. The tape length shall be as specified in table I.

3.5 Operating temperature. The operating ambient temperature shall be +5° Celsius (C) to +45°C (+41° fahrenheit (F) to +113°F).

3.6 Operating relative humidity. The operating relative humidity shall be 20 percent to 80 percent non-condensing.

3.7 Dewpoint temperature. The maximum dewpoint temperature shall be +84°F.

3.8 Storage temperature. The storage temperature shall be +23° F to +113°F.

3.9 Storage relative humidity. The storage relative humidity shall be 20 percent to 80 percent non-condensing.

3.10 Maximum wet bulb temperature. The maximum wet bulb temperature shall be +79°F.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 7045

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics - mini data cartridges.

CID PIN AA55559/02-	Cartridge type	Cartridge industry standard	Native formatted memory capacity	Minimum tape length feet (ft)	Format	Tape speed coercivity (oersteds)
-001	DC2000	ANSI X3.249 3/	40 Megabyte (Mb)	205	Non formatted	550
-002	DC2060	ANSI X3.249 3/	60 Mb	205		550
-003	DC2080	ANSI X3.249 3/	80 Mb	205		550
-004	DC2120	ANSI X3.249 3/	120 Mb	307.5		550
-005	DC2120XL	ANSI X3.249 3/	170 Mb	425		550
-006	DC2300	QIC-143	560 Mb	215		550
-007	DC3000	QIC 143	750 Mb	300		900
-008	DC3000XL	QIC 143	1 Gigabyte (Gb)	400		900
-009	MC3080	QIC 156	1.6 Gb	400		900
-010	DC2000QIC40	ANSI X3.249 3/	40 Mb	205	formatted 1/	550
-011	DC2060QIC40	ANSI X3.249 3/	60 Mb	205	formatted 1/	550
-012	DC2080QIC80	ANSI X3.249 3/	80 Mb	205	formatted 2/	550
-013	DC2120QIC80	ANSI X3.249 3/	120 Mb	307.5	formatted 2/	550

1/ Formatted to Quarter-Inch Cartridge Drive Standard (QIC), QIC-40.
2/ Formatted to QIC-80.
3/ Not approved as of date of this document, shown for reference only.

3.11 Flammability. The materials used in the external cartridge covers must have a flammability rating of at least UL94V-2.

3.12 Used or reconditioned material. A manufacturer shall not furnish any electronic data processing tape which is used or reconditioned or is comprised of used or reconditioned material.

3.13 Marking. Electronic data processing tape supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55559.

5. PACKAGING. Packaging shall be as specified in A-A-55559.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these instruments to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:52Z
Check the source to verify that this is the current version before use.

6.3 Source of documents.

Commercial Item Description

A-A-55559 - Tape, Electronic Data Processing, Cartridge, General Specification for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 40 (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Other Publications

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI X3.249 - Unrecorded Magnetic Tape Cartridge for Information Interchange, 0.25 in (6.35 mm), 10000-14700 ftpi (394-579 ftpmm), Coercivity 550 Oersteds (44000 amperes/meter). (Types 2000, 2060, 2080, 2120).

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002).

QUARTER-INCH CARTRIDGE DRIVE STANDARDS, INCORPORATED (QIC)

QIC-40 - Flexible-Disk-Controller-Compatible Recording Format for Information Interchange, 0.250 in. (6.35 mm) Tape, 20 Tracks, Data Density: 10,000 BPI (394 BPMM), MFM Encoded, Formatted Capacity: 40 Mbytes (with DC2000 or Equivalent Minicartridge).

QIC-80 - Flexible-Disk-Controller-Compatible Recording Format for Information Interchange, 0.250 in.(6.35 mm) Tape, 28 Tracks, Data Density: 14,700 BPI (579 BPMM), MFM Encoded, Formatted Capacity: 120 Mbytes (with DC2120 or Equivalent Minicartridge), 80 Mbytes (with DC2080 or Equivalent Minicartridge).

QIC-143 - Unrecorded Magnetic Tape Minicartridge for Information Interchange, 0.25 inch (6.35 mm) tape width, 50,800 ftpi (2,000 ftpmm), 900 Oersteds (72,000 amperes/meter) for 3.5-inch form factor tape drives. Intended for use with the following recording formats: QIC-3010-MC, QIC-3020-MC, QIC-3030-MC, QIC-3040-MC, or QIC-3050-MC.

QIC-156 - Unrecorded Magnetic Tape Minicartridge for Information Interchange, 0.25 inch (6.35 mm) tape width, 45,000 ftpi (1,772 ftpmm), 900 Oersteds (72,000 amperes/meter), Intended for use with the following recording format: QIC-3080-MC/QIC-152.

(Applications for copies should be addressed to the Quarter-Inch Cartridge Drive Standards, Incorporated, 311 East Carrillo Street, Santa Barbara, CA 93101.

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.4 Government users. To acquire information on obtaining these electronic data processing tapes from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOC, 1507 Wilmington Pike, Dayton, OH 45444-5520, or telephone (513) 296-5625.

6.5 Ordering data. Ordering data shall be as specified in A-A-55559.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:52Z
Check the source to verify that this is the currentversion before use.

6.6 Suggested sources of supply. Suggested sources of supply are listed below. Additional sources will be added as they become available.

CID dash number (see table I) AA55559/02-	Vendor commercial PIN CAGE 0CEN9	Vendor commercial PIN CAGE 0DA14	Vendor commercial PIN CAGE 0EGZ7	Vendor commercial PIN CAGE 52327
001	---	GO-10050	14426	DC2000
002	---	GO-10051	---	DC2060
003	---	GO-10059	14427	DC2080
004	PL2120	GO-10058	14431	DC2120
005	---	---	---	DC2120XL
006	---	---	---	DC2300
007	---	---	---	MC3000
008	---	---	---	MC3000XL
009	---	---	---	MC3080
010	---	GO-10077	36042	DC2000QIC40
011	---	GO-10076	---	DC2060QIC40
012	---	GO-10078	---	DC2080QIC80
013	PL2120QIC	GO-10079	36040	DC2120QIC80

Vendor CAGE number	Vendor name and address
0CEN9	Syncom Technologies, Incorporated 1000 Syncom Drive Mitchell, SD 57301-4767 (800) 843-9862
0DA14	Anacomp Incorporated 1155 Western Avenue Cincinnati, OH 45203-1123 (203) 647-7646
0EGZ7	BASF Corporation Information Systems Division 35 Crosby Drive Bedford, MA 01730-1471 (703) 642-1551
52327	Minnesota Mining And Manufacturing Company Data Storage Products Division 3M Center, 224-5N-39 St. Paul, MN 55144-1000 (805) 388-4029

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:52Z
Check the source to verify that this is the current version before use.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - KMR

Preparing Activity:

DLA-ES

Project 7045-0022-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.