[INCH-POUND]
A-A-55559/3
August 31, 1995


COMMERCIAL ITEM DESCRIPTION

TAPE, ELECTRONIC DATA PROCESSING, 4 MILLIMETER (MM) (.157 INCH (IN) WIDE, UNFORMATTED, COMPATIBLE WITH DIGITAL DATA STORAGE (DDS) OR DATA/DIGITAL AUDIO TAPE (DAT) RECORDING FORMATS, SUPPLIED IN AN UNRECORDED HELICAL-SCAN DIGITAL COMPUTER TAPE CARTRIDGE

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for an unformatted 4mm wide electronic data processing tape that is compatible with DDS or Data/DAT recording formats. This tape is supplied in an unrecorded helical-scan digital computer tape cartridge. Electronic data processing tapes covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

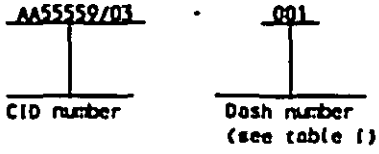

3. SALIENT CHARACTERISTICS.

3.1 Design and construction. Electronic data processing tapes supplied to this CID shall be as specified herein and shall meet the requirements of ANSI X3.206.

3.2 Industry standard tape format. The industry standard tape formats which this electronic data tape is compatible with shall be as specified in table I.

3.3 Tape width and tolerance. The tape width and tolerance shall be 3.81 mm + 0 mm, -0.020 mm (0.150 inch +0.0000 inch, -0.0008 inch).

3.4 Tape length. The tape length shall be as specified in table I.

3.5 Operating temperature. The operating ambient temperature shall be +5° Celsius (C) to +45°C (+41° fahrenheit (F) to +113°F).

3.6 Operating relative humidity. The operating relative humidity shall be 20 percent to 80 percent non-condensing.

3.9 Maximum operating wet bulb temperature. The maximum operating wet bulb temperature shall be +26°C (+79°F).

3.7 Storage temperature. The storage temperature shall be +5°C to +32°C (+41° F to +90°F).

3.8 Storage relative humidity. The storage relative humidity shall be 40 percent to 60 percent.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A FSC 7045

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics.

CID PIN AA55559/03-	Industry standard tape format	Formatted memory capacity	Minimum tape length in meters (M)	Minimum tape length in feet (ft)
-001	Formatted to DDS recording format 1/	1.3 Gigabyte (Gb)	60	196.85
	Formatted to Data/DAT recording format 2/	1.0 Gb		
-002	Formatted to DDS recording format 1/	2.0 Gb	90	295.28
	Formatted to Data/DAT recording format 2/	1.53 Gb		
-003	Formatted to DDS recording format 1/	4.0 Gb	120	393.70
	Formatted to Data/DAT recording format 2/	2.0 Gb		

1/ DDS recording format as specified in ANSI X3.203.
2/ Data/DAT recording format as specified in ANSI X3.205.

3.9 Maximum storage wet bulb temperature. The maximum storage wet bulb temperature shall be +26°C (+79°F).

3.10 Flammability. The materials used in the external cartridge covers must have a UL 94HB flammability rating as a minimum.

3.11 Used or reconditioned material. A manufacturer shall not furnish any electronic data processing tape which is used or reconditioned or is comprised of used or reconditioned material.

3.12 Marking. Electronic data processing tape supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55559.

5. PACKAGING. Packaging shall be as specified in A-A-55559.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See 2 for PIN format example.

6.2 CAGE code. For ordering purposes, inventory control, and submission of these instruments to DESC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

6.3 Source of document.

Commercial Item Description

A-A-55559 - Tape, Electronic Data Processing, Cartridge, General Specification for.

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Other Publications.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI X3.203 - Information Systems-Helical-Scan Digital Computer Tape Cartridge, for Information Interchange (3.81-mm) (0.150-in) Digital Data Storage (DDS) Recorded Format).

ANSI X3.205 - Information Systems-Helical-Scan Digital Computer Tape Cartridge, for Information Interchange (3.81-mm) (0.150-in) Data/DAT Recorded Format).

ANSI X3.206 - Information Systems-Unrecorded Helical-Scan Digital Computer Tape Cartridge for Information Interchange - 3.81 mm (0.150 in).

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002).

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 94 - Safety Tests for Flammability of Plastic Materials for Parts in Devices in Appliances, Standard for.

(Applications for copies should be addressed to the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.4 Government users. To acquire information on obtaining these electronic data processing tapes from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOC, 1507 Wilmington Pike, Dayton, OH 45444-5520, or telephone (513) 296-5625.

6.5 Ordering data. Ordering data shall be as specified in A-A-55559.

6.6 Suggested sources of supply. Suggested sources of supply are listed below. Additional sources will be added as they become available.

CID dash number (see table I) AA55559/03-	Vendor commercial PIN CAGE 0CEN9	Vendor commercial PIN CAGE 0DA14	Vendor commercial PIN CAGE 0EGZ7	Vendor commercial PIN CAGE 52327
001	PL4mm60	L0-41460	14455	DDS-60
002	PL4mm90	L0-41490	14460	DDS-90
003	PL4mm120	---	36038	DDS-120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.

Vendor CAGE number	Vendor name and address
0CEN9	Syncom Technologies, Incorporated 1000 Syncom Drive Mitchell, SD 57301-4767 (800) 843-9862
0DA14	Anacomp Incorporated 1155 Western Avenue Cincinnati, OH 45203-1123 (203) 647-7646
0EGZ7	BASF Corporation Information Systems Division 35 Crosby Drive Bedford, MA 01730-1471 (703) 642-1551
52327	Minnesota Mining And Manufacturing Company Data Storage Products Division 3M Center, 224-5N-39 St. Paul, MN 55144-1000 (805) 388-4029

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - KMR

PREPARING ACTIVITY:

DLA-ES

Project 7045-0022-03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:52Z
Check the source to verify that this is the current version before use.