INCH-POUND

MIL-C-70581B (AR)
23 August 1990

SUPERSEDING
(See 6.6)

MILITARY SPECIFICATION

CIRCUIT BOARD, +5.2 VOLT CONVERTER, VOLTAGE CONVERTER
(PIVADS): 9397383

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a Voltage Converter's, +5.2 Volt board used on Gun, Anti-Aircraft Artillery, Self-Propelled (M163A2) and Towed (M167A2) Vehicles. The +5.2 Volt board is a dc power supply with internal overcurrent protection and overvoltage sensing comprised of three microcircuits, three transformers, and resistor, capacitor, and semiconductor circuitry (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 - Standard Requirements for Soldered Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

D9397383 - +5.2 V Module Assembly
D9397406 - +5.2 Volt Converter Schematic

PACKAGING DATA SHEET

PS9397383 - Packaging of +5.2 V Module Assembly

(Copies of drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are thosse listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

INSTITUTE FOR INTERCONNECTING
AND PACKAGING ELECTRONIC CIRCUITS

ANSI/IPC-DW-425 - Design and End Product Requirements for Discrete Wiring Boards

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 9397383, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the +5.2 Volt board shall meet the requirements of MIL-F-13926 and ANSI/IPC-DW-425 as follows:

3.2.1 MIL-F-13926.

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
d. Workmanship

3.2.2 ANSI/IPC-DW-425.

a. IPC-DW-425/11 Type C1 plated through connection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

3.3 Environmental service conditions.

3.3.1 Vibration. The +5.2 Volt board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations for 3 hours along each of three mutually perpendicular axes within the frequency range of 2 to 500 hertz (Hz). The rate of change of frequency at each frequency range shall not exceed 1 Hz per second.

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 40 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% decade.
The 10-40-10 hertz sweep time is 2 minutes 30 seconds ± 10%.

3.3.2 Shock. The +5.2 Volt board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 40 g's ±10%, 11 milliseconds ±10%, half-sine wave applied in each direction of 3 mutually perpendicular axes. The G value of each impulse shall be within ±10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5 1/2 ms.

3.3.3 Altitude (non-operating). The +5.2 Volt board shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The +5.2 Volt board shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 degrees F and +155 degrees F.

3.3.4.2 Non-operating (storage). The +5.2 Volt board shall not suffer permanent damage when subjected to the constant temperature extremes of -60 degrees F for a period of 24 hours and +160 degrees F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The +5.2 Volt board shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. The electrical characteristics and continuity of the +5.2 Volt board shall be as specified on the +5.2 Volt Converter schematic diagram 9397406.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

3.5 Performance.

3.5.1 Functional Description. The +5.2 volt board generates a +5.1 volt output.

3.5.2 Supply voltages. The +5.2 volt board shall operate when 21.0 to 32.0 volts direct current (Vdc) is connected between J1-3, J1-15 (+28 V), and J1-4. J1-16 (Rtn) and 14.85 to 15.15 Vdc is connected between J1-17 (+15 C) and J1-4, J1-16 (Rtn).

3.5.3 Nominal dc output voltage. The output voltages from J1-9, J1-10, J1-21 and J1-22 (+5.2 V) shall be 4.95 to 5.15 Vdc, when the supply voltages specified in 3.5.2 are applied and J1-18 (START) is set to 0 Vdc and J1-19 (+5.2 V Synch) set to 15 V peak, 100 KHz square wave signal.

3.5.4 Shutdown. The output voltages from J1-9, J1-10, J1-21 and J1-22 (+5.2 V) shall be 0.1 Vdc maximum, when the supply voltages specified in 3.5.2 are applied and J1-18 (START) is set to 15 ±.15 Vdc and J1-19 (+5.2 V Synch) set to 15 V peak, 100 KHz square wave signal.

3.5.5 Overvoltage protection. The output voltage from J1-6 (CROW 5) shall be 3.8 volts minimum, when the supply voltages specified in 3.5.2 are applied and J1-7 is set to 7 + 0.1 Vdc, and J1-19 (+5.2 V Synch) set to 15 V peak, 100 KHz square wave signal.

3.5.6 Synchronization signal. The output signal from J1-5 (+5.2 FB) shall be a square wave having a frequency of 50 KHz ± 50 Hz, when the supply voltages specified in 3.5.2 and J1-19 (+ 5.2 V Synch) set to 15 V peak, 100 KHz square wave signal.

3.6 Soldering. The +5.2 V board shall be soldered per the general requirements and task F of MIL-STD-2000.

3.7 Burn-in. The +5.2 V board shall meet the requirements of 3.5 after each stabilization during the following burn-in stress application: the unit shall be cycled between -40 deg C, -5 deg C, and 71 deg C +5 deg C at a rate of 6 deg C/minute ±1 deg C/min with temperature stabilization at each extreme, for a total of six (6) 180-minute cycles. The unit shall be energized after stabilization at -40 deg C and deenergized after stabilization at 71 deg C. The last three (3) cycles shall be failure free.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5 and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F.
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three +5.2 Volt boards for inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies, components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table I (Functional Test) and Table II (Special Sampling) herein and to any or all requirements of the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

TABLE I. Functional tests
(100% Inspection)

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
103. Burn-in	3.7	4.9
Minor:	None	N/A

4.5 Special sampling. One +5.2 Volt board out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table II. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE II. Special sampling

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
104. Vibration	3.3.1	4.7.1.1
105. Shock	3.3.2	4.7.1.2
106. Altitude	3.3.3	4.7.1.3
107. Temperature	3.3.4	4.7.1.4
108. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which

does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table III (Test equipment list), or equivalent meeting minimum requirements, shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE III. Test equipment list

ITEM NUMBER	DESCRIPTION
1. Power Supply #1 +28 Vdc	0 to 30 V, adjustable. Load regulation of 1 percent or better from 0 to 15 amps. Less than 1 percent P-P ripple.
2. Power Supply #2 +15 Vdc	0 to 15 V adjustable. Load regulation of 1 percent or better from 0 to 50 amps. Less than 1 percent P-P ripple.
3. Power Supply #3 +15 Vdc	0 to 30 V adjustable. Load regulation of 1 percent or better from 0 to 5 amperes. Less than 1 percent P-P ripple.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

TABLE III. Test equipment list (cont)

ITEM NUMBER	DESCRIPTION
4. Oscilloscope	Input impedance of 1 megohm or greater. Dual time base with mixed sweep capabilities. Voltage ranges 0 to 5 Vdc per division. 20 MHz band width minimum.
5. Square Wave Generator #1	Produces a 100 KHz square wave ±5 percent with an amplitude of 15 Vdc into a 25-ohm load.
6. Digital Multimeter	Accuracy and resolution of ±0.2 percent from 1 to 100 Vdc. Input impedance 10 megohms or greater.
7. Burn-in Load Fixture and Heatsink	Provide interface between power supply and circuit board and temperature chamber.
8. Datalogger	Multiple channel stripchart recorder; Record time, date, temperature, AC and DC voltages.
9. True RMS Voltmeter	Input range from 0 V to 700 VRMS, 1000 VRMS peak. Input impedance for 2 mV to 700 VRMS is 10 megohms. Minimum frequency range from 2 Hz to 11 MHz. Minimum resolution of 0.5 percent.
10. Temperature Chamber	-40 deg X to 71 deg C at a rate of ±6 deg C/minute, minimum.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The +5.2 Volt board shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the +5 Volt board shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 40 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz. After the application of all the shock impulses, the +5.2 Volt board shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (non-operating). This test shall be performed as specified in Procedures III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.7.3 Performance. The performance of the +5.2 Volt board shall be tested as follows using the equipment listed in Table IV. All output parameters and power inputs shall comply with the requirements of 3.5. The phase "power up" shall reference the following sequence in all tests.

a. Hook up Power Supply No. 1 (Table III, item 1) +28 Vdc to pin J1-3 and Return J1-4, 16.

b. Hook up Power Supply No. 2 (Table III, item 2) +15 Vdc to pin J1-17 and Return J1-4, 16.

4.7.3.1 Nominal dc output voltage. The nominal dc output of the +5.2 Volt board shall be tested to meet the requirements of 3.5.3 as follows:

a. Power up (see 4.7.3).

b. Hook up Square Wave Generator (Table III, item 5) 100 KHz to pin J1-19 and Return J1-4, 16.

c. Hook up Power Supply No. 3 (Table III, item 3) 0 Vdc to pin J1-18 and Return J1-4, 16.

d. Under 7.5 A load, 30 Vdc $\pm$0.1 Vdc input, using digital multimeter (Table III, item 6) and the ripple using true rms voltmeter (Table III, item 9), verify the dc output voltage between J1-7 and J1-8 is 4.95 to 5.15 Vdc and between J1-9 and J1-11 is 4.95 to 5.15 with a maximum dc output ripple 20 mV rms.

e. Repeat above steps under 15 A load, 22 Vdc $\pm$0.1 Vdc input.

4.7.3.2 Shutdown. The shutdown requirements shall be tested to meet the requirements of 3.5.4 as follows:

a. Power up (see 4.7.3).

b. Hook up Power Supply No. 3 (Table III, item 3) 15 Vdc to pin J1-18 and Return J1-4, 16.

c. Hook up Square Wave Generator (Table III, item 5) 100 KHz to pin J1-19 and Return J1-4, 16.

d. Verify pin J1-9 voltage is 0.1 Vdc maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.7.3.3 Over-voltage protection. The over-voltage protection circuitry shall be tested to meet the requirements of 3.5.5 as follows:

a. Power up (see 4.7.3).

IMPORTANT: The unit shall be under no load during this test.

b. Hook up Power Supply No. 3 (Table III, item 3) 7 Vdc to pin J1-7 and Return J1-8.

c. Hook up Square Wave Generator (Table III, item 5) 100 KHz to pin J1-19 and Return J1-4, 16.

d. Verify pin J1-6 is 3.8 Vdc minimum.

4.7.3.4 Synchronization signal. The synchronization signal shall be tested to meet the requirements of 3.5.6 as follows:

a. Power up (see 4.7.3).

b. Hook up Square Wave Generator (Table III, item 5) 100 KHz to pin J1-19 and Return J1-4, 16.

c. Verify 50 KHz frequency at pin J1-5 to J1-16 with amplitude of 15 Vdc $\pm$.15 Vdc using oscilloscope (Table III, item 4).

4.8 Soldering. Soldering processes and workmanship shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified by 3.6 herein.

4.9 Burn-in. The +5.2 Volt board shall be temperature cycled and burned-in, as required by 3.7 herein, for 6 complete cycles as shown in Figure 1, for a total of 18 hours minimum, using the burn-in test set-up shown in Figure 2. Temperature shall be measured at the fixture's heatsink.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

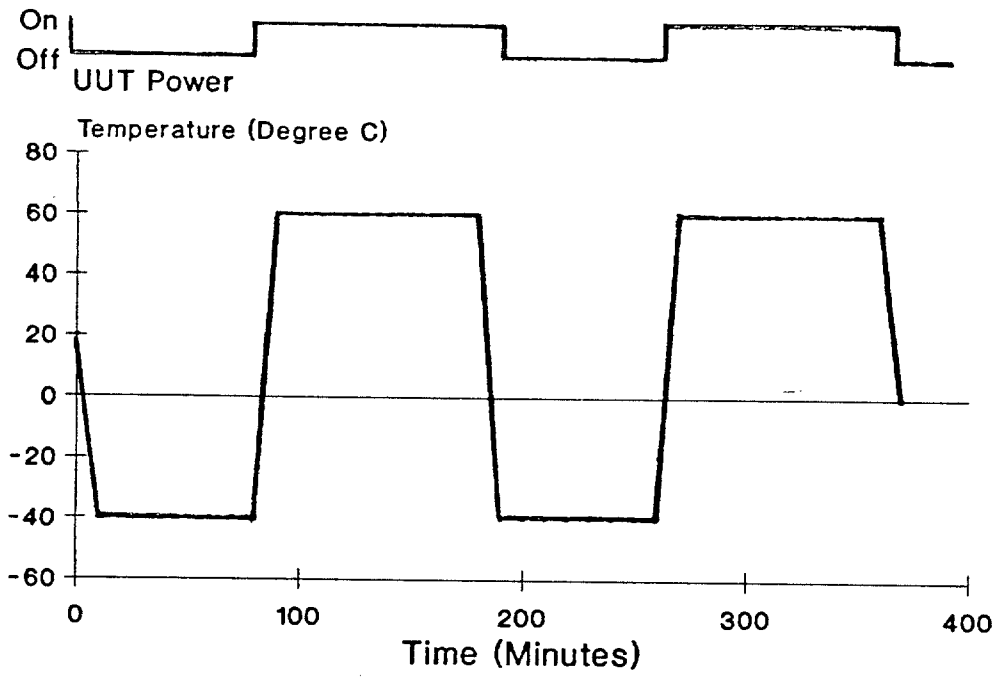


Figure 1. Burn-in Temperature Versus Time Diagram

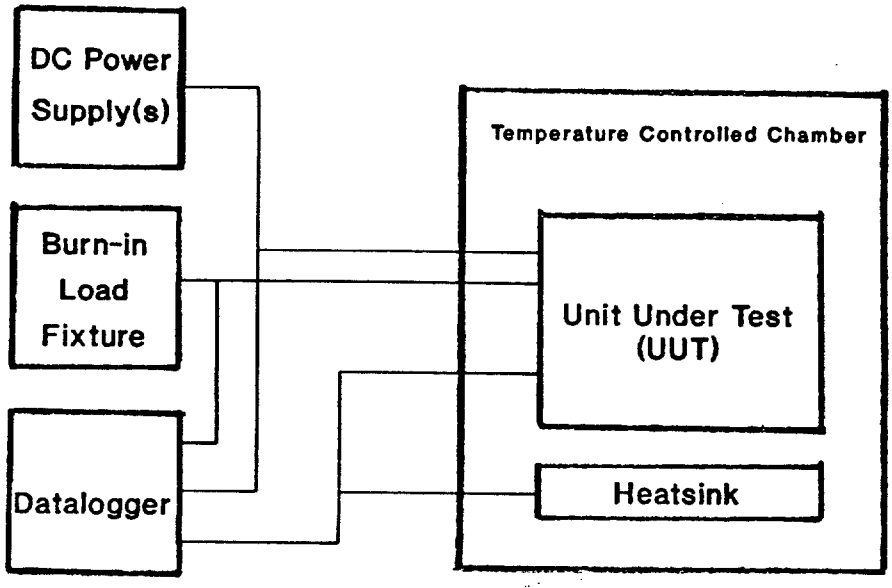


Figure 2. Burn-in Test Set-up

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet PS9397383.

6. NOTES

(This section contains information of a general explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The +5.2 Volt board shall be used in the Voltage Converter of the PIVADS self-propelled and towed vehicles, as a dc power supply.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First Article Sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Circuit card assembly
Fire Control System
Product Improved Vulcan Air Defence System (PIVADS)
Voltage converter 5.2 volt

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. The previous issues were for ARDEC internal use only. They were not forwarded to Naval Publication and Forms Center (NPFC) for publication. This issue is initial public release for unlimited distribution.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A758)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-70581B (AR)	2. DOCUMENT DATE (YYMMDD) 23 August 1990

3. DOCUMENT TITLE
CIRCUIT BOARD, +5.2 VOLT CONVERTER, VOLTAGE CONVERTER (PIVADS): 9397383

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US Army ARDEC Standardization & Specification Office	b. TELEPHONE (Include Area Code) (1) Commercial (201) 724-6674 (2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SCMAR-BAC-S Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.