MIL-M-63457A(AR)
26 August 1987
SUPERSEDING
MIL-M-63457 (AR)
15 June 1982

MILITARY SPECIFICATION

MINE, ANTITANK: HE, BLU-91/B
LOADING, ASSEMBLING AND PACKING

This Specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This Specification contains requirements not normally covered by the drawings, and provides quality assurance provisions for the loading, assembling and packing for one type of mine designated as Mine, Antitank: HE, BLU-91/B, used in CBU-78/B and CBU-89/B Dispensers.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-S-45743	Soldering, Manual Type, High Reliability, Electrical and Electronic Equipment.
MIL-A-48078	Ammunition, Standard Quality Assurance Provisions General Specification For.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S Army Armament,Munitions and Chemical Command, Attn AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

AMSC N/A
FSC 1345
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

MIL-STD-286 - Propellant, Solid: Sampling, Examination and Testing.
MIL-STD-331 - Fuze and Fuze Components, Environmental and Performance Tests for.
MIL-STD-652 - Propellant, Solid for Cannon Requirements and Packing.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawmgs, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (See 6.5)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

PRODUCT DRAWINGS

9330379 - BLU-91/B Electronics Assembly
9330381 - Mine, Antitank: HE, BLU-91/B
9332388 - Performance Requirements, Electronic Assembly
9330377 - Printed Wiring Board Assembly

INSPECTION EQUIPMENT DRAWINGS

1183AS616 - Standard Wave Forms

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified the issues of the documents which DoD adopted shall be the issue listed in the current DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM Designation D792 - Specific Gravity and Density of Plastics by Displacement", Method A-1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:27Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania, 19103).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. Material shall be in accordance with the applicable drawings, specifications and standards.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing (Dwg) 9330381 and all associated drawings and with all requirements specified in applicable specifications and standards.

3.3 Safe condition and circuit continuity verification.

3.3.1 S&A assembly. The S&A Assembly (Dwg. 9328692) shall be in the full safe condition as evidenced by presence and proper position of the following safety features/components:

a. Interlock pin.
b. Borerider ball lock.
c. Borerider.
d. Slider release pin and slider release shear pin.
e. Slider assembly.
f. Detonators and piston actuator shall be shorted to common ground.

There shall be no damage to the two (2) mild detonating fuzes (MDF) or to the flex cable. Damaged MDF is described as any crack in the lead sheathing or necking down (reduction in diameter) below 75% of the original diameter anywhere along the length of the MDF. Also, the end caps shall not be damaged, crushed or loose.

3.3.2 Electronics. Prior to and after assembly of S&A to Electronic-MCD, verification checks, as specified in Table II, shall be made of the inactivated battery voltage, integrity of shorting bars and continuity/resistance.

3.4 Soldering. Soldering of the S&A flexprint to the electronic assembly terminals shall be performed in a thorough, workmanlike manner in accordance with MIL-S-45743.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.5 Explosive output performance

3.5.1 Pretest of booster explosive. Each lot of Booster Explosive used to manufacture booster shall be qualified prior to use in production. The Booster (Dwg. 9277827) when initiated, shall result in high order detonation of the Main Charge and perforation of one (1) inch thick and a one-half (1/2) inch thick hot rolled steel plates spaced apart, and shall produce span on subsequent witness plates (see 4.5.3). Span is defined as any evidence of particle indentation on the third plate.

3.5.2 Pretest of main charge explosive. Each lot of Main Charge Explosive used to manufacture main charges shall be qualified prior to use in production. The Main Charge (Dwg. 9278018) when initiated by the Booster, shall produce a high order detonation and perforation of one (1) inch thick and a one-half (1/2) inch thick hot rolled steel plates spaced apart and shall produce span on subsequent witness plates (see 4.5.3). Span is defined as any evidence of particle indentation on the third plate.

3.6 Mine functioning. The mines, after initiation and impact (see 4.4.5 and 6.6), shall function as follows:

3.6.1 Arming delay. The mine shall arm upon the elapse of the electronic arm time (Arming actuator output) specified on Dwg. 9332388, as evidenced by functioning of the piston actuator.

3.6.2 Tactical HE mines. The mines shall be capable of functioning in the prime target sensor mode against a target, and in self-destruct mode.

3.6.2.1 Prime target sensor mode functioning. The armed mine subjected to a valid target signature shall produce a high order detonation and perforation of one (1) inch thick and one-half (1/2) inch thick hot rolled steel plate spaced apart, and shall produce span on subsequent witness plates (See 4.5.3). Span is defined as any evidence of particle indentation on the third witness plate.

3.6.2.2 Self-destruct (SD) function. The armed mine shall function properly within the self destruct time specified on Dwg. 9332388, as evidence by high order detonation of the main charge after initiation and impact.

3.6.3 Functioning after maximum time. The armed mines which fail to self destruct (SD) after the maximum (max.) set SD time as specified on Dwg. 9332388 has elapsed, shall not be capable of being functioned by target sensor, self destruct or any other stimuli.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.7 Controls in use of adhesives. The contractor shall develop a documented operational procedure for utilization of adhesives. This procedure shall provide for quality control of raw materials and process to be used; details associated with intended use, such as proper handling, dispensing, mixing, curing cycles, pot life, etc., cleaning agents, safety precautions, special ventilation, drying or other processes, and any other information of a similar nature that is considered necessary for the particular adhesive in use. This procedure shall be updated whenever a change is made such that the original assurance of product quality is affected. Submission of this procedure shall be in accordance with Data Item Description DI-T-5372 (Tailored). (See 6.9)

3.8 Documentation of plan for safety in handling and processing of munitions. Prior to loading, the contractor shall document a detailed plan of the procedures to be employed during handling of the munition. This documentation shall describe, as a minimum, the procedures to be employed to assure that the temperature of the electronics assemblies, mine assemblies, do not exceed 165°F at any time during processing or storage and in such instances the time at 165°F shall not exceed one (1) hour unless otherwise specified herein. In no case shall continuous storage of the items be at a temperature above 100°F for a period exceeding 30 days. Submission of the plan shall be in accordance with data item description DI-R-5372 (tailored). (See 6.9)

3.9 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by-the contractor shall be as specified in the contract.

3.10 Data requirement. The contractor shall generate data in accordance with the requirements of the data item description cited in 6.9.

3.11 Workmanship. All parts and assemblies shall be fabricated, loaded and assembled in a thorough workmanlike manner, and all manufacturing, processing, and assembling operations shall be correctly performed. All parts and assemblies shall be clean, free of burrs, sharp edges, cracks, dirt, grease, rust, and other foreign matter that may impair proper functioning. The cleaning method used shall not be injurious to any part, nor shall the parts be contaminated by the cleaning agent(s). Exterior surface coating shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat and sharply defined. Required packing shall be dry. The boosters and main charges shall be free of surface defects (voids, protrusions, inclusions). Breakage (chips, nicks) on the outside edge (corner) of the main charge not exceeding 1/8 sq. inch in area, 1/8 inch in depth, and not exceeding three (3) per side are acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The following types of inspections shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated.

Part Description	Drawings	Quantity
Booster	9277827	10
Main Charge	9278018	10
Mine, Antitank: HE, BLU-91/B	9330381	21

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE: Mine, Antitank: HE, BLU-91/B		SHEET 1 OF 1		DRAWING NUMBER: See below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Main Charge (Dwg. 9278018)				
	Examination of Defects	5		3.2	4.4.2.1
	Density	5		3.2	4.5.2
	Explosive output performance	5		3.5.2	4.5.3
	Booster (Dwg. 9277827)				
	Examination of Defects	5		3.2	4.4.2.2
	Density	5		3.2	4.5.2
	Explosive output performance	5		3.5.1	4.5.3
	Mine, Antitank: HE, BLU-91/B (Dwg. 9330381)				
	Examination of defects	21		3.2	Visual
	Functioning			3.6	4.4.2.9

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of mines shall contain:

a. S&A Assemblies (Dwg. 9328692) of one lot interfix from one manufacturer.
b. Electronics-MCD Assemblies (Dwg. 9330379) of one lot interfix number from one manufacturer .
c. Main Charge (Dwg. 9278018) of one explosive lot interfix number from one manufacturer .
d. Booster (Dwg. 9277827) of one explosive lot interfix number from one manufacture .
e. Propellant Cup Assemblies (Dwg. 9292175) of one lot interfix from one manufacturer.
f. M-S plates of one lot interfix number from one manufacturer.

Maximum lot size shall be no more than one (1) month production (30 calendar day period).

4.4.2 Examination. (See MIL-A-48078) and 4.4.2.1 thru 4.4.2.9. Unless otherwise specified in the Classification of Defects and Tests tables, sampling plans and procedures for major and minor defects shalll be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Main Charge	1 OF 1	9278018
			NEXT HIGHER ASSEMBLY: 9330380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter		(a)	3.2	Gage
102	Inside diameter		(a)	3.2	Gage
103	True position of ID to OD		(a)	3.2	Gage
104	Spherical radius, 360° around (2 sides)		(a)	3.2	Gage
105	Length		(a)	3.2	Gage
106	Thickness		(a)	3.2	Gage
107	Density		(b)	3.2	4.5.2
108	Cracks or laminations		0.40%	3.2	Visual
109	Material				Certification
110	Explosive output test (See Note d)		(c)	3.5.2	4.5.3
Minor					
201	Poor workmanship		0.65%	3.11	Visual

NOTES:
(a) See 4.4.3.1 for sampling plan and accept/reject criteria.
(b) See 4.4.3.2 for sampling plan and accept/reject criteria.
(c) See 4.4.3.3 for sampling plan and accept/reject criteria.
(d) Data item description DI-R-1724 applies for the test. Submit each time test is run.

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Booster				9277827
					NEXT HIGHER ASSEMBLY 9330380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter		(a)	3.2	Gage
102	Inside diameter		(a)	3.2	Gage
103	True position of ID to OD		(a)	3.2	Gage
104	Length		(a)	3.2	Gage
105	Cracks or laminations		(a)	3.2	Visual
106	Density		(b)	3.2	4.5.2
107	Material				Certification of Conformance
108	Explosive output test (See Note d)		(c)	3.5.1	4.5.3
Minor					
201	Poor workmanship		0.65%	3.11	Visual
	NOTES:				
	(a) See 4.4.3.1 for sampling plan and accept/reject criteria.				
	(b) See 4.4.3.2 for sampling plan and accept/reject criteria.				
	(c) See 4.4.3.3 for sampling plan and accept/reject criteria.				
	(d) Data item description DI-R-1724 applies for the test. Supply data each time test is performed				

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Propellant Cup Assembly				9292175
					NEXT HIGHER ASSEMBLY 9330380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Weight of propellant incorrect		0.40%	3.2	Balance, Note 1
102	Cup waterproofness destroyed (separation of seal, cup punctured, etc.)		0.40%	3.2	4.5.7, Note 1
103	Moisture and volatile contents of propellant		0.40%	3.2	4.5.6, Note 1
104	Packaging containers for assemblies lack humidity control, see drawing requirement; MIL-STD-652D		0.40%	3.2	Visual, Note 1
Minor					
201	Poor workmanship		0.65%	3.11	Visual

NOTES:

1. If secured from vendor: Certificate of conformance attesting to above requirements will be satisfactory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	S&A Assembly (Prior to assembly of Electronics - MCD Assy)	1 OF 1	9328692
			NEXT HIGHER ASSEMBLY: 9330380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Flex cable circuits not shunted		100%	3.2	Gage, Note 1, Note 2
2	Length from body to slider assy, max		100%	3.3.1	Gage, 4.5.1.1, Note 2
3	Slider release pin or shear pin missing		100%	3.3.1	Gage, 4.5.1.1, Note 2
4	Borerider ball lock missing		100%	3.3.1	Gage, 4.5.1.1, Note 2
5	Lock plate missing		100%	3.2	Visual, Note 2
6	Interlock pin position improper		100%	3.3.1	Gage, 4.5.1.1, Note 2
Major					
101	Depth to borerider, min.		100%	3.3.1	4.5.1.1, Gage
102	MDF missing or damaged, 2 places		0.40%	3.3.1	Visual
103	MDF end cap damaged, 2 places		0.40%	3.3.1	Visual/Manual
104	Main charge lead improperly installed, 4 places		0.40%	3.2	Visual, Note 3
105	Flex cable twisted, cracked		0.40%	3.3.1	Visual
106	Parallel detonator resistance incorrect		0.40%	3.2	4.5.1.2
107	Piston actuator resistance incorrect		0.40%	3.2	4.5.1.2
Minor					
201	Poor workmanship		0.65%	3.11	Visual

NOTES:
1. Flex cable received unshunted.
2. Data item DI-R-1721 applies - report required only when defects are found.
3. Improperly staked, obstructed or wrong color end, loose or missing.

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Electronics - MCD Assy (Prior to Assy of S&A Assy)				9330379
					NEXT HIGHER ASSEMBLY 9330380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Short across firing capacitor: open		100%	3.3.2	4.5.1.2, Note 1
2	Fuse and ID resistance checks, 2 places		100%	3.3.2	4.5.1.2, Note 1
3	Insulator missing or not covering all test pads		100%	3.2	Gage, Note 2
Major					
101	Battery activated		100%	3.3.2	4.5.1.2
102	MCD coil parallel with EBP & shorting bar resistance, D-F & G-F		100%	3.3.2	4.5.1.2
103	Terminal pins not clean, 2 locations		0.40%	3.2	Visual
104	Visual damage		0.40%	3.2	Visual
105	MCD coil soldering improper		0.40%	3.2	Visual
Minor					
201	Poor workmanship		0.65%	3.11	Visual

NOTES: 1. Data item description DI-R-1721 applies. Submission of the report shall be whenever defects are found. 2. To be performed prior to operations noted in 4.4.2.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Mine Subassembly (Consisting of S&A; M-S Plate; Electronics End Bracket Assy; Propellant Cup Assy, Outer Cup, Electronics-MCD Assy.)	1 OF 1	9330380
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	Prior to Uploading Main Charge				
101	Parallel detonator resistance, incorrect		100%	3.2	4.5.1.2
102	Piston actuator resistance, incorrect		100%	3.2	4.5.1.2
103	MCD coil circuit continuity - resistance (After #101, 102)		100%	3.2	4.5.1.2
104	"O" Ring missing, or not lubricated (Drawing Note 7)		100%	3.2	Visual
105	Electronic end bracket assy missing		0.40%	3.2	Visual
106	MDF cord pinched, damaged, or not seated in bracket assy		0.40%	3.2	Visual
107	Propellant cup assy missing		0.40%	3.2	Visual
108	Tape missing from cable		0.40%	3.2	Visual
109	Solder joint incorrect		0.40%	3.4	Visual
110	Shorting section of cable, not cut off		0.40%	3.2	Visual
111	Flex cable cracked, twisted		0.40%	3.2	Visual
Minor					
201	Poor workmanship		0.65%	3.11	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.7	Mine Case Assembly, BLU-91/B				9330380
					NEXT HIGHER ASSEMBLY
					9330381
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Length from body to slider assy, max.		100%	3.2	4.5.1.1 Gage, Note 2
Major	During Assembly				
101	Cracks in HE material		0.40%	3.2	Visual, Note 1
102	Exposure of M5 propellant, 2 places		0.40%	3.2	Visual
103	Spacer end bracket assy improperly assembled		0.40%	3.2	Visual
104	Pressure ring incorrectly inserted		0.40%	3.2	Visual
105	MDF cord pinched or damaged, or not seated in bracket assy		0.40%	3.2	Visual
106	Clearing charge not seated in cavity		0.40%	3.2	Visual
107	Adhesive incorrect, missing or incorrectly applied		0.40%	3.7	Visual, 4.4.3.4
108	"O" rings missing or improperly located		0.40%	3.2	Visual,
109	Insulating disc missing		0.40%	3.2	Visual
	After Loading And Assembly				
111	Any cover gasket wrinkled and extruded from cover, or missing		0.40%	3.2	Visual
112	Cover not crimped or sealed 360°, top and bottom		100%	3.2	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.7	Mine Case Assembly, BLU-91/B	2 OF 2	9330380
			NEXT HIGHER ASSEMBLY: 9330381

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
113	Overall diameter		0.40%	3.2	Gage
114	Overall height		0.40%	3.2	Gage
115	Any cover loose		0.40%	3.2	Visual/Manual
Minor					
201	Paint damaged or incomplete		0.65%	3.2	Visual
202	Poor workmanship		0.65%	3.11	Visual

NOTES:
1. Prior to assembly.
2. Prior to assembly of spacer end cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.8	Mine Assembly BLU-91/B				9330381
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Depth to borerider, min		100%	3.2	Gage
102	Width, max		0.40%	3.2	Gage
103	Length, max		0.40%	3.2	Gage
104	Height, max		0.40%	3.2	Gage
105	Primer missing or incorrect		0.40%	3.2	Visual
106	Aeroballistic seal missing or incorrectly applied		0.40%	3.2	Visual
107	Location of mine in housing (vertical)		100%	3.2	Gage
108	Location of borerider to datum -A-		100%	3.2	Gage
109	Borerider located incorrectly with respect to mine center line		100%	3.2	Visual
Minor					
201	Rivet(s) missing or incorrect		0.65%	3.2	Visual
202	Distance from housing to fastener incorrect 2 places		0.65%	3.2	Gage
203	Poor workmanship		0.65%	3.11	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

Paragraph 4.4.2.9 Mine Assembly BLU-91/B Sheet 1 of 1 Dwg. 9330381

Inspection Lot Size	Sample Size	Prime Sensor	SD 1/
0-1200	21	12	9
1201-3200	32	18	14
3201-10000	32	18	14
10001-35000	50	24	26

				ACCEPT - REJECT CRITERIA 3/			
Prime Sensor	Hot	Amb	Cold	(Critical) Premature Arming/Detonation	(Major) Early SD	(Critical) Hazardous Duds	(Major) Failure 2/
12	4	4	4	0-1	0-1	0-1	0-1
18	6	6	6	0-1	1-2	0-1	0-1
18	6	6	6	0-1	1-2	0-1	0-1
24	8	8	8	0-1	1-2	0-1	0-1

			ACCEPT - REJECT CRITERIA (Total SD) 3/			
SD	T_1	T_2	(Critical) Premature Arming/Detonation	(Major) Early SD	(Critical) Hazardous Duds	(Major) Failure 2/
9	4	5	0-1	0-1	0-1	0-1
14	7	7	0-1	0-1	0-1	0-1
14	7	7	0-1	0-1	0-1	0-1
26	13	13	0-1	0-1	0-1	0-1

NOTES:

1/ Environmental or safety constraints may require SD Testing be performed at a Proving Ground.
2/ Failures: Low order or failure to function.
3/ Function Mode; Accept and Reject Criteria; Requirement: 3.6; Test Method: 4.4.3.5/4.5.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Dimensional control of main charges and boosters (See Dwg. 9278018 and 9277827). The dimensions/parameters specified in paragraphs 4.4.2.1 and 4.4.2.2 for the main charges and boosters shall be checked by randomly selecting three (3) samples from the quantity produced by each press during a period not to exceed four (4) hours. The samples shall be allowed to cool and become dimensionally stable prior to inspecting. The quantity represented by the samples shall be identified and not used in production until the dimensional inspections are completed. If any one (1) sample fails to comply with the dimensional requirements, the quantity of parts represented by the sample shall be subjected to 100% inspection. The contractor and technical agency shall determine the amount of time required for cooling and supply this information to the resident Government inspector. The above inspection shall also be performed each time a new lot of explosive material is used.

4.4.3.2 Density of the main charge and booster (See Dwg. 9278018 and 9277827). The density of the main charges and boosters produced from each press shall be checked by randomly selecting one (1) sample from the quantity produced by each press during a period not to exceed four (4) hours. The boosters and main charges shall be allowed to cool, become dimensionally stable and meet dimensional requirements prior to performing the density determination. The quantity represented by the sample shall be identified and not used in production until the density determination is made and the part accepted. If the sample fails to comply with the density requirements of the applicable drawing, the quantity of parts represented by the sample shall be subjected to 100% inspection. The contractor and technical agency shall determine the amount of time required for cooling and supply this information to the resident Government inspector. The above test shall also be performed each time a new lot of explosive material is used. The test shall be performed as specified in 4.5.2.

4.4.3.3 Explosive output performance. A sample of each lot of explosive used to manufacture main charges and boosters shall be tested prior to use in production. Ten (10) main charges shall be pressed and inspected for the defects listed in 4.4.2.1. The density of the samples shall be determined (See 4.5.2) and the samples with the highest and lowest density (within acceptance limits) set aside for explosive performance tests. The main charges shall be tested in accordance with 4.5.3 using boosters from a previously accepted booster lot. Ten (10) boosters shall be likewise pressed from each new batch of explosive. The boosters shall be inspected for the defects listed in 4.4.2.2. The boosters with the highest and lowest density shall be set aside for explosive performance test. The test shall be in accordance with 4.5.3 using main charges from an accepted main charge lot. Failure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

of the explosive performance samples to comply with the requirements of 3.5 shall result in rejection of the lot of explosive material represented by the sample. Results of these tests shall be supplied in accordance with 6.7.

4.4.3.4 Adhesive application. At the start of each days production and after each four (4) hours during production, and at the end of each shift, a verification of proper adhesive application shall be made following procedures generated by the contractor (See 3.7). The procedure shall assure that the proper amount of adhesive has been and is being dispensed and properly applied. The method shall assure that adhesive is not migrating to the S&A assembly. Additionally, all other process controls, delineated in 3.7, shall be verified at least once a shift. Evidence of inadequate adhesive application or migration of adhesive to the S&A during any of the verification checks shall result in rejection of that quantity of mines assembled since the last acceptable check. If the adhesive application does not comply with all requirements at the start of the production, the Contractor shall not proceed with production until corrective action has been taken and all requirements met.

4.4.3.5 Lot acceptance testing. The lot acceptance test sample shall be subjected to:

a. Transportation Vibration (TV) in accordance with the requirement of MIL-STD-331, Test No. 119, Procedure 2 (without borerider clip installed.

b. Temperature conditioning (after TV and without borerider clip installed) for a minimum of 4 hrs. in each temperature group: Hot (+145°F + 5°F), Ambient (+70°F ± 10°F), and Cold (-40°F - 5°F).

c. The preconditioned test units shall have the borerider pin and retaining clip installed and functioned per 4.4.2.9, prevailing ambient.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection-Method" column in the tables starting with 4.4.2.1. The contractor shall submit inspection equipment designs to the Government for approval in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and 6.3 herein.

4.4.5 Launch simulator. An airgun shall be used as the launcher for lot acceptance testing. Design to be submitted in accordance with 4.4.4. The airgun shall have the following features:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

a. Impart sufficient velocity to the mines to provide impacts of 150 + 6.0 feet per second (fps).

b. Provide the interface with the SD setter to initiate the mine prior to or at launch.

c. Provide for borerider release after ejection from the muzzle but prior to impact, (launch with borerider pin and borerider clip installed).

4.4.5.1 Impact medium. The impact or target material will consist of three (3) 1.5 inch thick particle boards (chipboard), with a density of 30 + 2 pounds per cubic foot, with a 1/2 in. thick steel back-up plate.

4.4.5.2 SD setter. The SD setter shall provide the magnetic coupling device (MCD) signal necessary to intiate and set the proper SD time into the mine. The signals necessary to perform this function are contained on Drawing 1183AS616, Standard Waveform. Design to be submitted in accordance with 4.4.4.

4.5 Methods of inspection or testing. PRECAUTION: This specification covers sampling and testing of explosive materials which are potentially hazardous to personnel. Accordingly, it is emphasized that all safety rules, regulations and procedures must be followed in handling and processing these materials.

4.5.1 Safety determination and circuit integrity verification prior to assembly of mine.

4.5.1.1 Verification of safe condition of S&A assembly. Prior to assembly to the Electronics, the safe position of the S&A slider assembly shall be verified. A flush pin gage shall be used to measure safe position of slider assembly. Gages shall be used to verify presence and safe position of the other safety components. Observation shall be made for compliance with requirements of 3.3.1. Any S&A failing the requirement shall be classed defective and removed from the lot. (Non-destructive test)

4.5.1.2 Electronics. The Electronics - MCD Assembly and S&A Assembly, resistance/continuity and battery voltage checks of each assembly shall be made to assure safe condition of the battery and positive shorting of the firing capacitor, and the integrity of electrical circuits specified in Table II. A ten (10) megohm input impedance voltmeter shall be used to test battery voltage and a milliohmmeter having a test current of one milliamp or less shall be used to perform electrical checks listed in Table II. Observation shall be made for compliance with requirement of 3.3.2. Any assembly failing any requirement shall be classed defective and removed from the lot. (Non-destructive test)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE II

Electrical Verification Checks of Electronics-MCD Assembly

Prior To and After Assembly


Electrical Check	Test Points	Requirements
1. Shorting Bar Across Firing Capacitor	6 to 9	.2 to .85 ohms
2. Unactivated Battery	8 to 3 3 to 9	0.005 volts max.
3. Fuse and I.D. Check	12 to 9	20K ± 10% ohms
4. Fuse and I.D. check	11 to 9	20K ± 10% ohms
5. Shorting bar in parallel with EBP plus MCD	G to F	.19 to .63 ohms
6. MCD in parallel with EBP plus shorting Bar	D to F	.85 to 1.4 ohms

After Assembly Only

Electrical Check	Test Points	Requirements
7. Piston Actuator Resistance	B to C	4.0 to 9.5 ohms
8. Detonators Resistance	A to C	1.5 to 3.75 ohms

TEST POINT LAYOUT - (DWG. 9330377) - Clearing Charge Well

Test Point Layout - Radius Side

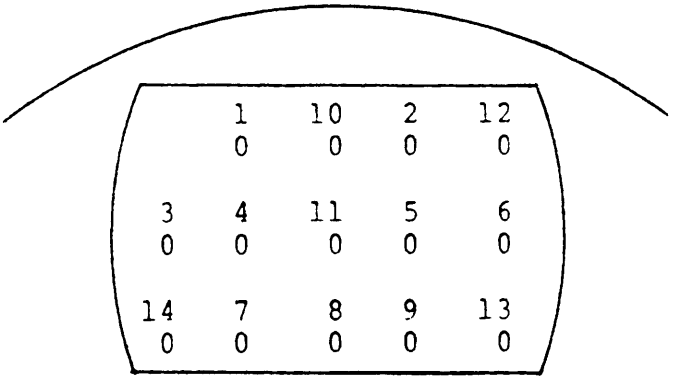


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE II (Cont'd)

Electrical Verification Checks of
Electronics-MCD Assembly

MCD SIDE OF ELECTRONICS - MCD ASSEMBLY

Bottom or flat side of Assembly

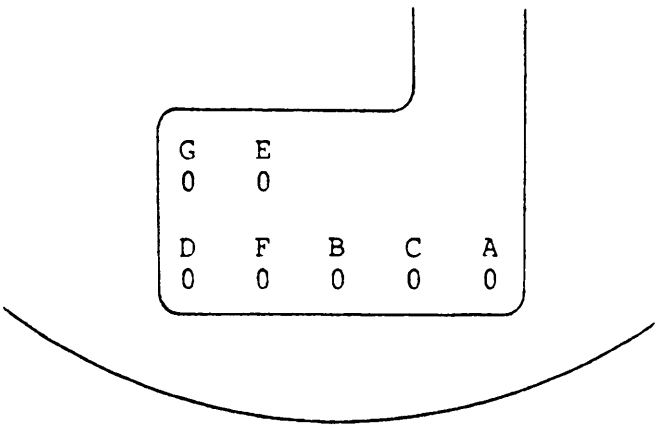

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.2 Density of the main charge and booster. Density of the main charge (9278018) and booster (9277827) shall be performed in accordance with the procedure specified in ASTM Designation D792 - "Specific Gravity and Density of Plastics by Displacement", Method A-1. The contractor may use alternate procedures than that specified herein, subject to the approval of the Government.

4.5.3 Explosive output performance. The main charges or boosters to be tested (see 4.4.3.3) shall be assembled and functioned in accordance with Drawing 9277922. The mine assembly shall be functioned under the plates configured in Fig. 1 following approved safety procedures.

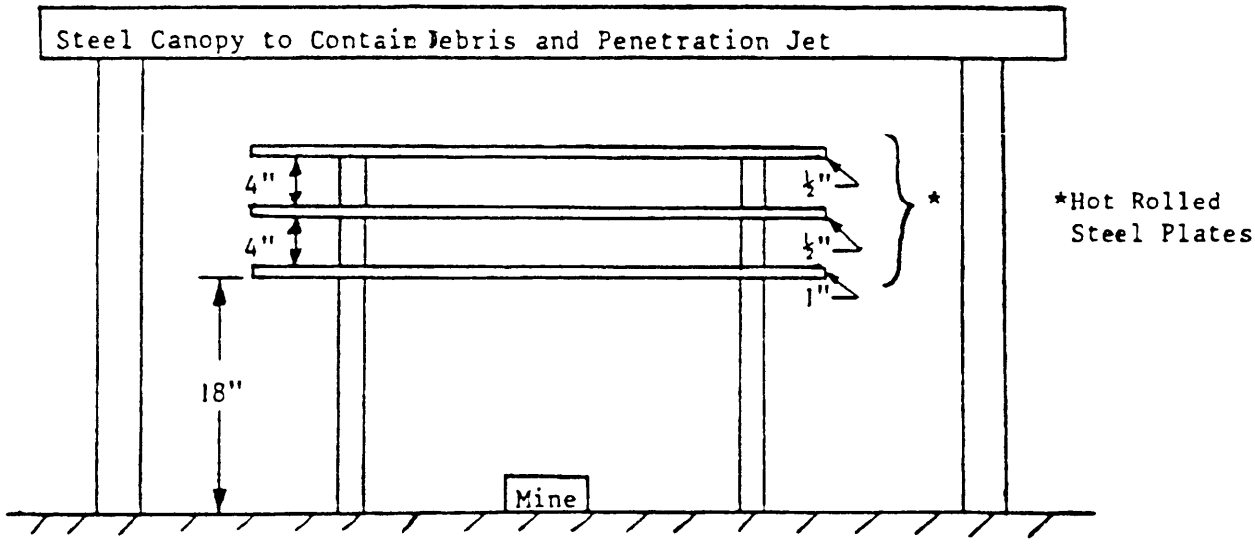


FIGURE 1. Target for HE mine functioning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.4 Mine functioning. Mine functioning will consist of initiating the mine; arming of the S&A; and functioning as follows:

a. Initiating and emplacing. Using the airgun launcher, and SD setter (4.4.5), the lot acceptance test mines shall be given the MCD signal, and launched into a test pit containing a microphone and target signature coil. This sequence will activate the mine and commit-to-arm the S&A assembly.

b. Final arming. After activation and the elapse of arming time specified in Dwg. 9332388, the piston actuator will be initiated releasing the spring loaded slider to the in-line position.

c. Mine functioning. After final arming and elapse of the maximum enable time, plus one hour minimum (See 6.6), the mines shall be functioned, by target sensor or SD modes.

d. Recording of events. Recording instruments shall be used to determine the test times to events. The starting point for arming time, enable time, SD time, etc. shall be the application of the MCD pulse to the mine. All test mines shall be serialized and their location noted to insure that the correct times are recorded for each mine.

4.5.5 Tactical HE test mines. Following initiation (MCD) and emplacement (airgun) of mine into a test pit, a target identical to that shown in Fig. 1 shall be positioned over a test mine. The mines shall be emplaced with the faces randomly oriented on a flat horizontal surface. After the time interval for arming and enable (6.6) events has elapsed, a valid target signature shall be applied. If any mine fails to function after the first attempt, the signature simulator circuit adequacy shall be checked and if found adequate, a second and third attempt shall be made to function the mine by the simulator. Success in the second or third attempt will be reported as a second or third attempt success. Failure in the third attempt will be classed defective, reported as a dud and the mine will be destroyed in place. Observation shall be made for compliance with requirements of 3.6.2,1. The time between functional attempts shall be no less than 5 minutes.

4.5.5.1 Self destruct (SD) mode. The test mines shall be initiated (MCD) and emplaced (airgun) into a test pit for self destruct functioning. If a mine fails to function by the set self destruct time plus 24 hours, a valid target signature shall be applied. Observation shall be made for compliance with requirements of 3.6.2.2/3.6.3. Any mine failing to comply with the requirements of 3.6.2.2, or 3.6.3 shall be classed defective. Any mine failing to function in both modes shall be destroyed in place (See 6.6 e and f).

NOTE: Enable time is defined as the maximum electronic arm time specified on DWG. 9332388, plus 5 minutes, minimum, after application of electromagnetic pulse (MCD).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.6 Moisture and volatiles content of charge assembly propellant. The contractor shall provide adequate controls to insure compliance with the applicable requirement. The moisture and total volatiles content of each lot of propellant shall be determined at the loading station at the time of loading the charge assemblies. This determination shall be made at least once for each eight (8) hours of production. Sampling and testing of the propellant shall be in accordance with MIL-STD-286, Method 101.1.2. If the moisture and total volatiles content fails to comply with the requirement specified on the applicable drawing and loading of the charge assemblies has not begun, the propellant lot shall be rejected until corrective action has been taken as verified by repeating the moisture and total volatiles content determination. If loading has begun, charge assemblies loaded with the non-conforming propellant shall be rejected.

4.5.7 Leakage test of propellant charge assembly. The specified quantity of charge assemblies shall be subjected to the pressure specified on the applicable drawing using equipment as specified in 4.4.4. A water immersion test shall be used. Any assembly which emits bubbles shall be rejected. Charge assemblies so tested shall not be returned to any lot. (Destructive test)

5. PACKAGING

5.1 Packaging requirements. The only packaging requirements that are required is for intraplant storage prior to loading, assembling and packing of the CBU-78/B and CBU-89/B Dispensers.

6. NOTES

6.1 Intended use. The Mine, Antitank: HE, BLU-91/B covered by this specification intended for use as an antitank mine dispensed from Dispensers CBU-89/B and CBU-76/B.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. See MIL-A-48078. Submit equipment designs as required to Commander US Army Armament, Research, Development and Engineering Center, ATTN: AMSMC-QAT-I (D), Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data items D1-R-1714 will apply.

6.4 Distribution of ammunition data cards and test data. Distribution of data cards shall include the following: Technical Agency required in contract. Commander, US Army Armament, Research, Development and Engineering Center, ATTN: AMSMC-QAT-M (D), Picatinny Arsenal, NJ 07806-5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research, Development and Engineering Center (ARDEC) , may also include drawings prepared by, and identified as, US Army Armament Research and Development Command (ARRADCOM), Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.6 Premature arming: premature detonation: early self destruct (SD); enable time; hazardous duds; non-hazardous dud (Dud); high order function: For purposes of the tests in this specification, the following terms are defined:

a. Premature arming. Is defined as arming of the S&A assy (evidenced by actuation of piston actuator) before the minimum arming actuator output time specified on Dwg. 9332388. (Critical defect)

b. Premature detonation. Is defined as detonation of mine (S&A armed) occuring before the minimum sensor enable time specified on Dwg. 9332388. (Critical defect)

c. Early self destruct. Is defined as detonation of the mine (S&A armed) occuring at or after the minimum sensor enable time specified on Dwg. 9332388 but before being functioned by any intended mode. (Major defect)

d. Enable time. Is defined as the maximum sensor enable time specified on Dwg. 9332388, plus 5 minutes minimum, after application of electromagnetic pulse.

e. Hazardous dud. Is defined as an armed mine capable of being functioned, after the set SD time has elapsed, by target sensor, disturbance, self-destruct or any other stimuli (See 3.6.3) . (Critical defect)

f. Non-hazardous dud (Dud). Is defined as a mine incapable of being functioned, after the set SD time has elapsed, by any of the modes listed in 6.7e above (See 3.6.3). (Major defect)

g. High order functioning. HE Mine: High order functioning will be evidenced by high order detonation of the Main charge train and perforation (by the M-S plate) through a one (1) inch thick and a one-half inch thick hot rolled steel plates and span on subsequent witness plate (See 3.6.2.1 and 4.5.3).

6.7 Submission of results from contractor conducted examinations and tests. Unless otherwise specified by the Contracting Officer, the contractor shall forward requested records of examinations and tests to Commander, US Army Armament Research, Development and Engineering Center, ATTN: AMSMC-QAT-M (D), Picatinny Arsenal, NJ 07806-5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

6.8 Submission of procedures. Submission of procedures specified in 3.8 shall be addressed to Technical Agency required in contract. Commander, US Army Armament Research, Development and Engineering Center, ATTN: AMSMC-QAT-M (J)), Picatinny Arsenal, NJ 07806-5000.

6.9 Data requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
3.7, 4.4.3.4	Plan for control in use of adhesives	DI-T-5372 (Tailored)
3.8, 6.8	Safety Plans	DI-T-5372 (Tailored)
4.4.3.3 6.7	Quality Inspection Test, Demonstration & Evaluation Report	DI-R-1724
6.4	Ammunition Data Card	DI-L-1410

6.10 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where significant changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations.

6.11 Subject term (key word) listing.

Mine
Anti-tank
HE, BLU 91/B
Main charge
Explosive
Self-destruct
Prime target
Modes
Launch simulator

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1345-A470)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

MINE ASSEMBLY, BLU 91/B, TEST (AT-40)
ASSEMBLING AND PACKING

10. SCOPE

10.1 Scope. This appendix details the quality assurance provisions for loading, assembling and packing of one type of mine designated as Mine Assembly, BLU 91/B, Test (AT-40) used in CBU 78 (T-4)/B and CBU 89 (T-4)/B Test Dispensers. This appendix is a mandatory part of this specification. The information contained herein is intended for compliance. Unless otherwise specified herein the requirements for Mine Assembly, BLU 91/B, Test (AT-40) sub-assemblies are identical to the requirements for Mine, Anti-Tank: HE, BLU 91/B contained in this specification. Each paragraph in the specification for the HE Mine is included in this appendix to indicate its applicability to the Test Mine.

20. APPLICABLE DOCUMENTS

20.1 Issue of documents.

20.1.1 Specifications.

This paragraph is applicable to this appendix. (Applicable)

20.1.2 Standards. Applicable.

20.1.3 Drawings. (See 60.5)

US ARMY ARMAMENTS RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

PRODUCT DRAWINGS

9349483	- Mine Assembly, BLU 91/B, Test (AT-40)
9330379	- BLU 91/B Electronics MCD Assembly
9332388	- Performance Requirements, Electronic Assembly
9330377	- Printed Wiring Board Assembly

INSPECTION EQUIPMENT DRAWINGS

1183AS616	- Standard Wave Forms

20.2 Other publications. Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

20.3 Order of precedence. Applicable

30. REQUIREMENTS

30.1 Material. Applicable.

30.2 Components and assemblies. This paragraph is applicable except that Dwg. 9330381 is replaced by Dwg. 9349483.

30.3 Safe condition and circuit continuity verification. Applicable.

30.3.1 S&A assembly. Applicable.

30.3.2 Electronics. Applicable.

30.4 Soldering. Applicable.

30.5 Explosive output performance. Not Applicable.

30.5.1 Pretest of booster explosive. Not Applicable.

30.5.2 Pretest of main charge explosive. Not Applicable.

30.6 Mine functioning. Applicable.

30.6.1 Arming delay. Applicable.

30.6.2 Tactical HE mines. Applicable, with the title changed to "Test Mines".

30.6.2.1 Prime target sensor mode functioning. Applicable when modified to read "the armed mine subjected to a valid signature shall produce a high order detonation (See 60.6)".

30.6.2.2 Self-destruct (SD) function. This paragraph is applicable with the phrase "of the main charge" deleted.

30.6.3 Functioning after maximum time. Applicable.

30.7 Controls of adhesives. Applicable.

30.8 Documentation of plan for safety in handling and processing of munitions. Applicable. Additionally, this plan shall include the procedures that will be used to assure total segregation of the Mine Assembly, BLU 91B, Test (AT-40) from the Tactical BLU 91/B and Test BLU 91/B (AT-20) (Components and subassemblies).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

30.9 First article Inspection. Applicable.

30.10 Data requirements. Applicable.

30.11 Workmanship. This paragraph is applicable except that "The boosters and main charges" is replaced by "The inert boosters and main charges" and "1/8" is replaced by "1/4" in both places.

30.12 Verification of inert mine assembly. Each Mine Assembly, BLU 91/B, Test (AT-40) shall be examined to verify the presence of inert boosters and main charges.

40. QUALITY ASSURANCE PROVISIONS

40.1 Responsibility for inspection. Applicable.

40.2 Classification of inspections. Applicable.

40.3 First article inspection. Applicable.

40.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 40.3.2. The first article sample shall consist of the items and quantities specified in Table I.

40.3.2 Inspections to be performed. Applicable, with Table I herein.

40.3.3 Rejection. Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE: Mine Assembly, BLU 91/B, Test (AT-40)		SHEET 1 OF 1		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Main Charge Simulant (Dwg. 9317638)				
	Examination for Defects	5		30.2	40.4.2.1
	Density	5		30.2	40.5.2
	Booster Simulant (Dwg. 9317637)				
	Examination for Defects	5		30.2	40.4.2.2
	Density	5		30.2	40.5.2
	Mine Assembly, BLU 91/B, Test (AT-40) (Dwg. 9349483)				
	Examination for Defects	21		30.2	Visual
	Functioning			30.6	40.4.2.9

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

40.4 Quality conformance inspection. Applicable.

40.4.1 Inspection lot formation. This paragraph is applicable except for subparagraphs c and d which are not applicable.

40.4.2 Examination. Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
40.4.2.1	Main Charge Simulant	1	1	9317638
				NEXT HIGHER ASSEMBLY: 9349484

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Lead shot not present		100%	30.2	Visual
Major					
101	Outside diameter		(a)	30.2	Gage
102	Inside diameter		(a)	30.2	Gage
103	True position of ID to OD		(a)	30.2	Gage
104	Spherical radius, 360° around (2 sides)		(a)	30.2	Gage
105	Length		(a)	30.2	Gage
106	Thickness		(a)	30.2	Gage
107	Density		(b)	30.2	40.5.2
108	Cracks or laminations		0.40%	30.2	Visual
109	Material				Certification
Minor					
201	Poor workmanship		0.65%	30.11	Visual

NOTES:
(a) See 40.4.3.1 for sampling plan and accept/reject criteria.
(b) See 40.4.3.2 for sampling plan and accept/reject criteria.

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)
APPENDIX A

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
40.4.2.2	Booster Simulant				9317637
					NEXT HIGHER ASSEMBLY
					9349484
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Lead shot not present		100%	30.2	Visual
Major					
101	Outside diameter		(a)	30.2	Gage
102	Inside diemeter		(a)	30.2	Gage
103	True position of ID to OD		(a)	30.2	Gage
104	Length		(a)	30.2	Gage
105	Cracks or laminations		(a)	30.2	Visual
106	Density		(b)	30.2	40.5.2
107	Material				Certification of Conformance
Minor					
201	Poor workmanship		0.65%	30.11	Visual
NOTES:	(a) See 40.4.3.1 for sampling plan and accept/reject criteria. (b) See 40.4.3.2 for sampling plan and accept/reject criteria.				

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026l0-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)
APPENDIX A

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
40.4.2.3	Propellant Cup Assembly				9292175
					NEXT HIGHER ASSEMBLY 9349184
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Weight of propellant incorrect		0.40%	30.2	Balance
102	Cup waterproofness destroyed (separation of seal, cup punctured, etc.)		0.40%	30.2	Visual
103	Moisture and volatile contents of propellant		0.40%	30.2	40.5.6
104	Storage container does not contain moisture control		0.40%	30.2	Visual
Minor					
201	Poor workmanship		0.65%	30.11	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
40.4.2.4	S&A Assembly (Prior to assembly of Electronics - MCD Assy)				9328692
					NEXT HIGHER ASSEMBLY 9349484
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Flex cable circuits not shorted		100%	30.2	Gage, Note 1, Note 2
2	Length from body to slider assy, max		100%	30.3.1	40.5.1.1, Note 2
3	Slider release pin or shear pin missing		100%	30.3.1	40.5.1.1, Note 2
4	Borerider ball lock missing		100%	30.3.1	40.5.1.1, Note 2
5	Lock plate missing		100%	30.2	Visual, Note 2
Major					
101	Depth to borerider, min.		100%	30.3.1	40.5.1.1
102	MDF missing or damaged, 2 places		0.40%	30.3.1	Visual
103	MDF end cap damaged, 2 places		0.40%	30.3.1	Visual
104	Main charge lead improperly installed, 4 places		0.40%	30.2	Visual, Note 3
105	Flex cable twisted, cracked		0.40%	30.3.1	Visual
106	Parallel detonator resistance incorrect		0.40%	30.2	40.5.1.2
107	Piston actuator resistance incorrect		0.40%	30.2	40.5.1.2
Minor					
201	Poor workmanship		0.65%	30.11	Visual

NOTES:
1. Flex cable received unshorted.
2. Data item DI-R-1721 applies - report required only when defects are found.
3. Improperly staked, obstructed or wrong color end, loose or missing.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
40.4.2.5	Electronic-MCD Assembly (Prior to Assembly of S&A Assembly)	1	1	9330379
				NEXT HIGHER ASSEMBLY: 9349484

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Short across firing capacitor: open		100%	30.3.2	40.5.1.2, Note 1
2	Fuse and ID resistance checks, 2 places		100%	30.3.2	40.5.1.2, Note 1
3	Insulator missing or not covering all test pads		100%	30.2	Gage, Note 2
Major					
101	Battery activated		100%	30.3.2	40.5.1.2
102	MCD coil parallel with EBP & shorting bar resistance, D-F & G-F		0.40%	30.3.2	40.5.1.2
103	Terminal pins not clean, 2 locations		0.40%	30.2	Visual
104	Visual damage		0.40%	30.2	Visual
105	MCD coil soldering improper		0.40%	30.2	Visual
Minor					
201	Poor workmanship		0.65%	30.11	Visual

NOTES:
1. Data item description DI-R-1721 applies. Submission of the report shall be whenever defects are found. 2. To be performed prior to operations noted in 40.4.2.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
40.4.2.6	Mine Subassembly (Consisting of S&A; M-S Plate; Electronics End Bracket Assy; Propellant Cup Assy, Outer Cup and Electronics - MCD Assembly)	1 OF 2	9349484
			NEXT HIGHER ASSEMBLY 9349483

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
	Prior to Uploading Main Charge Simulant				
101	Parallel detonator resistance, incorrect		100%	30.2	40.5.1.2
102	Piston actuator resistance, incorrect		100%	30.2	40.5.1.2
103	MCD coil circuit continuity - resistance (After #101, 102)		100%	30.2	40.5.1.2
104	"O" Ring missing, or not lubricated (Drawing Note 7)		100%	30.2	Visual
105	Electronic end bracket assy missing		100%	30.2	Visual
106	MDF cord pinched, damaged, or not seated in bracket assy		0.40%	30.2	Visual
107	Propellant cup assy missing		0.40%	30.2	Visual
108	Tape missing from cable		0.40%	30.2	Visual
109	Solder joint incorrect		0.40%	30.4	Visual
110	Shorting section of cable, not cut off		0.40%	30.2	Visual
111	Flex cable cracked, twisted		0.40%	30.2	Visual
Minor					
201	Poor workmanship		0.65%	30.11	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
40.4.2.7	Mine Case Assembly, BLU-91/B (AT-40)				9349484
					NEXT HIGHER ASSEMBLY 9349483
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical 1	Length from body to slider assy, max.		100%	30.2	40.5.1.1 2/
Major	During Assembly				
101	Cracks in inert filler material		0.40%	30.2	Visual, 1/
102	Exposure of M5 propellant, 2 places		0.40%	30.2	Visual
103	Spacer end bracket assy improperly assembled		0.40%	30.2	Visual
104	Pressure ring incorrectly inserted		0.40%	30.2	Visual
105	MDF cord pinched or damaged, or not seated in bracket assy		0.40%	30.2	Visual
106	Clearing charge not seated in cavity		0.40%	30.2	Visual
107	Adhesive incorrect, missing or incorrectly applied		0.40%	30.2	Visual, 40.4.3.4
108	"O" rings missing or improperly located		0.40%	30.2	Visual
109	Insulating disc missing		0.40%	30.2	Visual
	After Loading and Assembly				
110	Any cover gasket wrinkled and extruded from cover, or missing		0.40%	30.2	Visual
111	Cover not crimped or sealed 360°, top and bottom		100%	30.2	Visual
112	Overall diameter		0.40%	30.2	Gage
114	Overall height		0.40%	30.2	Gage
115	Any cover loose		0.40%	30.2	Visual/Manual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63457A(AR)
APPENDIX A

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
40.4.2.7	Mine Case Assembly, BLU-91/B (AT-40)		9349484
			NEXT HIGHER ASSEMBLY 9349483

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Paint damaged or incomplete		0.65%	30.2	Visual
202	Poor workmanship		0.65%	30.11	Visual

NOTES:
1/ Prior to assembly.
2/ Prior to assembly of spacer and end cover assemply.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
40.4.2.8	Mine Assembly, BLU-91/B, Test (AT-40)				9349483
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
1	Lead Shot Not Present		100%	30.12	Radiographic, 40.5.8
2	Marking (Paint) missing or incorrect		100%	30.2	Visual
Major					
101	Depth to borerider, min		100%	30.2	Gage
102	Width, max		0.40%	30.2	Gage
103	Length, max		0.40%	30.2	Gage
104	Height, max		0.40%	30.2	Gage
105	Primer missing or incorrect		0.40%	30.2	Visual
106	Aeroballistic seal missing or incorrectly applied		0.40%	30.2	Visual
107	Location of mine in housing (vertical)		100%	30.2	Gage
108	Location of borerider to datum -A-		100%	30.2	Gage
109	Borerider located incorrectly with respect to mine center line		100%	30.2	Visual
Minor					
201	Rivet(s) missing or incorrect		0.65%	30.2	Visual
202	Distance from housing to fastener incorrect 2 places		0.65%	30.2	Gage
203	Poor workmanship		0.65%	30.11	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

40.4.2.9 Mine Assembly, BLU-91/B, Test (AT-40)

Inspection Lot Size	Sample Size	Prime Sensor	SD
0-1200	21	12	9
1201-3200	32	18	14
3201-10000	32	18	14
0001-35000	50	24	26

				ACCEPT - REJECT CRITERIA 2/			
Prime Sensor	Hot	Amb	Cold	(Critical) Premature Arming/Detonation	(Major) Early SD	(Critical) Hazardous Duds	(Major) Failure 1/
12	4	4	4	0-1	0-1	0-1	0-1
18	6	6	6	0-1	1-2	0-1	0-1
18	6	6	6	0-1	1-2	0-1	0-1
24	8	8	8	0-1	1-2	0-1	0-1

			ACCEPT - REJECT CRITERIA (Total SD) 2/			
SD	T_1	T_2	(Critical) Premature Arming/Detonation	(Major) Early SD	(Critical) Hazardous Duds	(Major) Failure 1/
9	4	5	0-1	0-1	0-1	0-1
14	7	7	0-1	0-1	0-1	0-1
14	7	7	0-1	0-1	0-1	0-1
26	13	13	0-1	0-1	0-1	0-1

NOTES:

1/ Failures: Low order or failure to function.
2/ Function Mode: Accept and Reject Criteria; Requirements: 30.6; Test Method: 40.4.3.5/40.5.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

40.4.3 Testing. Applicable,

40. 4.3.1 Dimensional control of main charge and boosters (See Dwg. 9278018 and 9277827). This paragraph is applicable except that "main charge and booster" is replaced by "main charge simulant and booster simulant (See Dwg. 9317638 and 9317637)", and the phrase "of explosive" is deleted.

40.4. 3.2 Density of the main charge and booster (See Dwg. 9278018 and 9277827). This paragraph is applicable except that "main charge and booster (See Dwg. 9278018 and 9277827)" is replaced by "main charge simulant and booster simulant (See Dwg. 9317638 and 9317637)", and the phrase "of explosive" is deleted.

40.4.3.3 Explosive output performance. Not applicable.

40.4.3.4 Adhesive application. Applicable.

40.4.3.5 Lot acceptance testing. Applicable.

40.4.4 Inspection equipment. Applicable.

40.4.5 Launch simulator. Applicable.

40.4.5.1 Impact medium. Applicable.

40.4.5.2 SD setter. Applicable.

40.5 Methods of inspection or testing. Applicable.

40.5.1 Safety determination and circuit integrity verification prior to assembly of mine. Applicable.

40. 5.1.1 Verification of safe condition of S&A assembly. Applicable.

40. 5.1.2 Electronics. Applicable.

40. 5.2 Density of the main charge and booster. This paragraph is applicable except that "main charge and booster" is replaced by "main charge simulant and booster simulant", and (9278018) and (9277827) are replaced by (9317638) and (9317637).

40.5.3 Explosive output performance. Not applicable.

40.5.4 Mine functioning. Applicable.

40.5.5 Tactical HE test mines. This paragraph is applicable except that "Tactical HE Test Mines" is replaced by "Test Mines", and the target should be sufficient to contain the mine debris.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:27Z
Check the source to verify that this is the current version before use.

40. 5.5.1 Self-destruct (SD) mode. This paragraph is applicable except that the mines should not be destroyed but failure analyzed

40.5.6 Moisture and volatiles content of charge assembly. Applicable.

40.5.7 Leakage test of propellant charge assembly. Not Applicable.

40.5.8 Verification of inert mine assembly. Each mine assembly shall be radiographer to verify the presence of a main charge simulant and booster simulant.

50. PACKAGING

50.1 Packaging requirements. Applicable. Additionally, the Test BLU 91/B (AT-40) shall be stored separately from the Test BLU 91/B (AT-20) and the Tactical BLU 91/B.

60. NOTES

60.1 Intended use. The Test Mine, BLU 91/B (AT-40) covered by this Specification is intended for use in two types of Test Dispensers, CBU 89 (T-4)/B and CBU 78 (T-4)/B.

60.2 Ordering data. Applicable.

60.3 Submission of inspection equipment design for approval. Applicable.

60.4 Distribution of ammunition data cards and test data. Applicable.

60.5 Drawings. Applicable.

60.6 Premature arming; premature detonation; early self-destruct (SD); enable time; hazardous duds; non-hazardous dud (Dud); high order function. This paragraph is applicable with the phrase "of the mine" deleted in subparagraphs b & c. Additionally, subparagraph g is redefined as follows:

"g. High order functioning. High order functioning will be evidenced by high order detonation of the S&A main charge leads".

60.7 Submission of results from contractor conducted examinations and tests. Applicable.

60.8 Submission of procedures. Applicable.

60.9 Data requirements. Applicable.

60.10 Changes from previous issue. Applicable.

60.11 Subject term (key word) listing. Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
ARDEC
ATTN: AMSTA-QA
PICATINNY ARSENAL, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-63457A	MINE, ANTITANK: HE, BLU-91/B LOADING, ASSEMBLING AND PACKING

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026/10/26T04:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

INCH-POUND

MIL-M-63457A(AR)
AMENDMENT 2
02 SEPTEMBER 1989
SUPERSEDING
AMENDMENT 1
13 June 1989

MILITARY SPECIFICATION

MINE, ANTI-TANK: HE, BLU-91/B
LOADING, ASSEMBLING AND PACKING

This Amendment forms a part of Military Specification MIL-M-63457A(AR), dated 26 August 1987, and is approved for use within the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

* 2.1.2 Add under Product Drawings:

"12589966 - Packing and Marking For Box, Fiberboard, Inner, For Mine, Anti-Personnel, BLU-92/B, or Mine, Anti-Tank, BLU-91/B.

"12589967 - Packing and Marking For Box, Wood, Outer, For Mine, Anti-Personnel, BLU-92/B, or Mine, Anti-Tank, BLU-91/B.

PAGE 21

4.4.5 Launch simulator. Subparagraph a: Delete "150+6.0" and substitute "145+25".

PAGE 26

* 5. Packaging. Delete Section 5 in its entirety and substitute the following:

"5. PACKAGING

5.1 Packaging.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Not applicable.

5.1.2 Level B. Not applicable.

5.1.3 Level C. Level C Packaging shall be in accordance with dwg. 12589966.

5.2 Packing.

5.2.1 Level A. Not applicable.

5.2.2 Level B. Not applicable.

5.2.3 Level C. Level C Packing shall be in accordance with dwg. 12589967.

5.3 Marking.

5.3.1 Level A. Not applicable.

5.3.2 Level B. Not applicable.

5.3.3 Level C. Level C Marking shall be in accordance with dwgs. 12589966 and 22589967."

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project: 1345-A559)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.