MILITARY SPECIFICATION

TRIPHENYL BISMUTH

This specification is approved for use within the US Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers the requirements and quality assurance provisions for the manufacture and acceptance of one type of triphenyl bismuth, (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament, Munitions and Chemical Command, Attn. AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 6810
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking For Shipment and Storage
MIL-STD-1168 - Lot Numbering of Ammunition
MIL-STD-1218 - ACS Chemicals

(Copies of specifications, standards, handbooks, drawings, publications, and Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

CODE OF FEDERAL REGULATIONS
Title 49, Transportation, Parts 100-199

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402. Order for the above publication should cite: 49 CFR 100-199 (latest revision).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E168 - Recommended Practices for General Techniques in Infrared Quantitative Analysis
ASTM E300-73 - Recommended Practice for Sampling Industrial Chemicals

(Application for copies should be addressed to the American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

UNITED NATIONS

United Nations - Transport of Dangerous Goods (Recommendations of the Committee of Experts on the Transport of Dangerous Goods)

(Applications for copies should be addressed to United Nations, Sales Section, First Ave., New York, N.Y.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for assoicated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. The Triphenyl Bismuth shall conform to the following requirements when tested in accordance with the applicable test method.

Property	Min	Max	Applicable Test Method
Purity	97.0	--	4.5.1
Melting Point, °C	76.0	78.5	4.5.2
Acetone Insolubles, %	--	0.1	4.5.3
Magnesium Content, %	--	0.003	4.5.4
Total Halide Content,%	--	0.05	4.5.5

3.2 Infrared spectrum. The IR spectrum of the sample shall contain the major peaks shown in Figure 1 when tested in accordance with 4.5.6.

3.3 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.4 Workmanship. The manufacturer shall implement procedures and controls to assure that the process and the product produced are not compromised by foreign materials and contaminants or any other conditions which may degrade the composition. Determination of foreign materials shall be in accordance with 4.5.7.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspection are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

4.3 First article inspection.


4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall be ten (10) pounds of triphenyl bismuth. The sample shall be obtained from the first production lot which has been produced by the contractor using the same production processes, procedures and equipment as will be used in fulfilling the contract. All materials shall be obtained from the same sources of supply as will be used in regular production.

4.3.2 Inspection to be performed. The sample will be subjected by the Government to any or all of the examinations or tests specified in Table II (MIL-A-48078).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

Figure 1 - IR Spectrum for Triphenyl Bismuth

MAJOR PEAKS, cm^{-1}	FUNCTIONAL GROUP
3050, 3020	C-H
1560	Ring Structure
1420	Ring Structure
730, 700	H on Ring
450	Phenol-Bismuth-Phenol

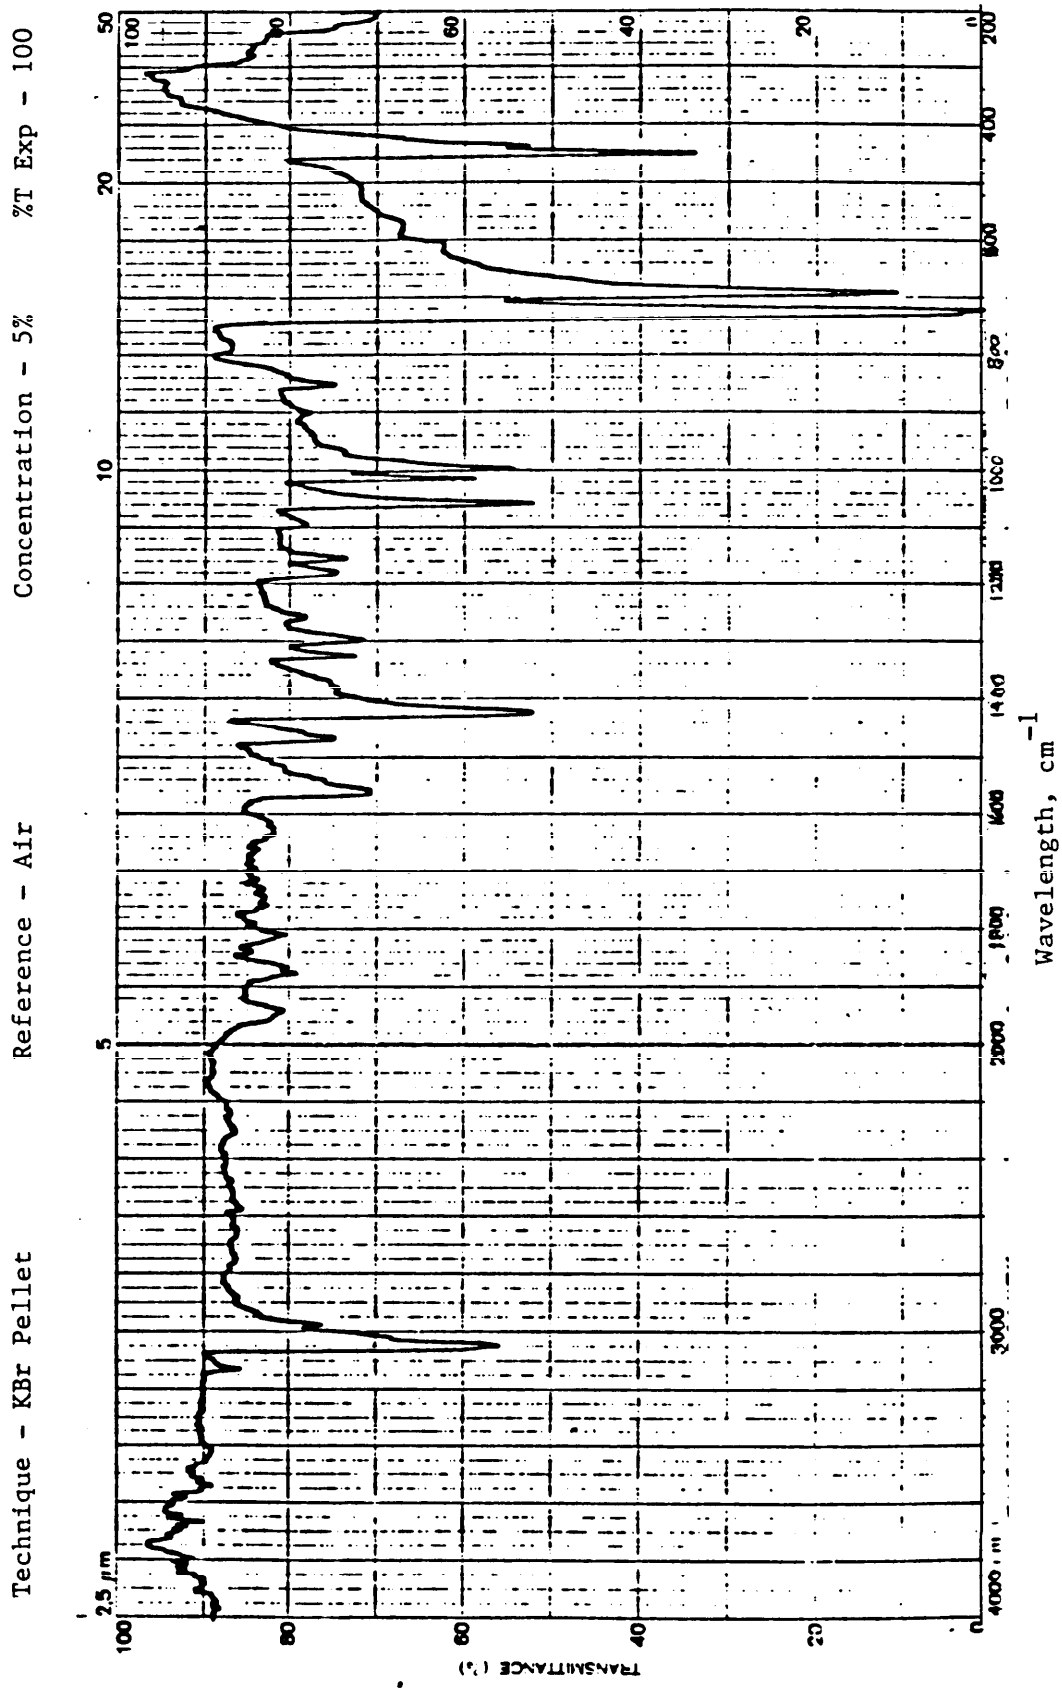

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE II. First article inspection

MIL-T-70681 (AR)

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET OF		DRAWING NUMBER
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Purity			3.1	4.5.1
	Melting Point, °C			3.1	4.5.2
	Acetone Insolubles			3.1	4.5.3
	Magnesium Content, %			3.1	4.5.4
	Total Halide Content, %			3.1	4.5.5
	Infrared Spectrum			3.2	4.5.6
	Workmanship			3.4	4.5.7

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Lot formation. A lot shall consist of one or more batches of triphenyl bismuth produced by one manufacturer, in accordance with the same specification, or same specification revision, under one continuous set of operating conditions. Each lot shall consist of that quantity of triphenyl bismuth that has been subjected to the same unit chemical or physical process intended to make the final product homogeneous. The lot shall comply with the provisions for submission of product as specified in MIL-STD-105. The criteria and procedure for the assignment of lot numbers shall be in accordance with MIL-STD-1168. Also, MIL-A-48078 applies.

4.4.2 Examination. See MIL-A-48078.

a. Workmanship. Examination for workmanship shall be conducted on each sample selected for testing in accordance with 4.4.3.1. If any sample fails to meet any test requirement the batch represented by the sample shall be rejected.

4.4.3 Testing. PRECAUTION: This specification covers sampling and testing of toxic and hazardous materials. Accordingly, it is emphasized that all applicable safety rules, regulations and procedures must be followed in handling and processing the triphenyl bismuth.

4.4.3.1 Sampling. Approximately 500 grams of the composition shall be selected from each batch to be sampled using ASTM Method E300-73 for solids. Samples shall be selected for inspection in accordance with table below. If any sample fails to meet any test requirement the batch represented by the sample shall be rejected. Each required test shall be performed in duplicate. No composite samples shall be used. The classification of defects shall be as given in Table III.

Number of containers in batch	Number of containers to be sampled
2 - 100	2
100 - 200	5
200 - 300	8
300 - 500	10
500 - 1000	13
1000 - 3000	20
3000 - 10,000	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

requirements specified herein are classified as follows:

TABLE III. Classification of Defects

Test Examination	Paragraph	Defects Classification
Purity	3.1	Major
Melting Point	3.1	Major
Acetone Insolubles	3.1	Major
Magnesium Content	3.1	Major
Total Halide Content	3.1	Major
Infrared Spectrum	3.2	Major
Workmanship	3.4	Major

4.4.4 Inspection equipment. For the performance of all tests and examinations specified in 4.4 and 4.5, commercial inspection equipment should be employed. The contractor shall have available and utilize correctly, this equipment and is charged with the responsibility of assuring that proper calibration procedures are followed.

4.5 Methods of inspection. All tests given in this section shall be performed using prescribed procedures for replicate determinations given in standard analytical chemistry textbooks. Also, unless otherwise specified herein, all chemicals shall be Reagent Grade or ACS Grade in accordance with MIL-STD-1218. See 6.3 for use of equivalent test methods.

4.5.1 Purity. The purity of triphenyl bismuth shall be determined as follows:

4.5.1.1 Apparatus

a. Liquid Chromatograph equipped as follows:

(1)	Detector	Ultraviolet (UV) variable wavelength with LC flow-through assembly
(2)	Column	C18 bonded reversed phase, 5-10 micrometers, 30 cm in length
(3)	Pump	Capable of operating up to 4000 psi pressure

b. Laboratory glassware

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.5.1.2 Reagents and standards.

a.	Triphenyl Bismuth	Recrystallized from heptane to maximum absorbance
b.	Triphenylmethane	Reagent grade
c.	Water	High pressure liquid chromatography (HPLC) grade
d.	Methanol	HPLC grade
e.	Acetone	UV grade
f.	Acetonitrile	HPLC grade

4.5.1.3 Procedures.

a. Prepare a stock solution of internal standard triphenylmethane (TPM) by weighing approximately 0.5 g TPM into a 100-milliliter (ml) volumetric flask and diluting to the mark with 50 ml acetone and 50 ml acetonitrile.

b. Weigh 0.5 g of TPB sample to be analyzed to the nearest 0.1 milligram (mg) into each of three volumetric flasks.

c. Weigh approximately 0.5 g of TPB standard to the nearest 0.1 mg into each of two 100-ml volumetric flasks.

d. Accurately pipette into each of the five flasks 1.0 ml of the internal standard stock solution. Dilute the flasks to the mark with acetonitrile.

e. Analyze the three samples and two standard solutions using liquid chromatograph instrument conditions as follows:

(1) Detector - Set at lowest wavelength below 226 mm at which a stable baseline can be obtained.

(2) Eluent - 80 percent methanol - 20 percent water.

(3) Flow Rate - Approximately 2.0 ml/minute.

(4) Injection - Use the same injection volume for sample and standard solutions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

f. Determine the areas under both TPM and TPB peaks for each sample and standard.

g. The internal standard corrected response factors for the standards should agree within 2 parts per hundred. If not, repeat the test. Calculate the average response factor:

Average response factor (R) = $W_1 (I_1/A_1) + W_2 (I_2/A_2)$

Where A = area of standard TPB peak,
W = standard concentration, mg/ml
I = area of standard TPM peak
1 = standard 1
2 = standard 2

h. Calculate the percent TPB in each sample as follows:

$$\text{Percent TPB} = \frac{R \times B \times 100}{C \times Is}$$

Where: R = response factor defined above
B = area of sample TPB peak
Is = area of sample TPM peak
C = sample concentration, mg/ml

i. Report TPB to nearest 0.1 percent.

4.5.2 Melting point. The melting point shall be determined as follows:

4.5.2.1 Apparatus.

a. Fisher-Johns melting point apparatus.

b. Optical cover glass.

4.5.2.2 Procedure.

a. Press a small quantity of the sample between two optical cover glasses. Place the glasses (with sample) on the heating block of a Fisher-Johns melting point apparatus.

b. Set the temperature control at "30".

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:30Z
Check the source to verify that this is the currentversion before use.

c. Observe the sample through the small magnifying glass provided with the equipment.

d. When the sample is seen to soften (begin to melt) note the temperature and record to the nearest 0.1°C.

e. Continue observing the sample until all solid has turned to liquid. Again note the temperature and record to the nearest 0.1°C.

f. Report the two temperatures described above as the melting range.

4.5.3 Acetone insolubles. Acetone insoluble matter shall be determined as follows:

4.5.3.1 Apparatus.

a. 250 ml beaker

b. Gooch crucible, 40 ml capacity

c. Glass fiber filter, Reeve Angel 934 AH or equivalent, 2.4 cm

d. Oven, gravity convection, regulated at 100 ± 2°C

4.5.3.2 Procedure.

a. Weigh to the nearest mg, approximately 5 grams (g) of sample into a 250 ml beaker and dissolve in 200 ml of acetone.

b. Filter the solution through a tared Gooch crucible containing the glass fiber filter, rinsing out the beaker with acetone and passing the rinsings through the crucible.

c. Wash the residue in the crucible with acetone until the washings are colorless.

d. Dry the crucible at 100° ± 2°C for one hour, cool in a desiccator; and weigh.

e. Calculate the acetone insoluble matter as follows:

$$\text{Acetone insoluble matter, \%} = \frac{B - A}{W} \times 100$$

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

where: A = tare weight of Gooch crucible, g
B = weight of crucible and residue, g
W = weight of sample, g

4.5.4 Magnesium content. The magnesium content shall be determined as follows:

4.5.4.1 Apparatus.

a. Atomic absorption spectrometer - Varian Model 1200, or equivalent.

b. Hollow cathode lamp - magnesium

c. Burner - four inch single slot for air-acetylene

4.5.4.2 Reagents.

a. Nitric acid - Reagent grade

b. Perchloric acid - Reagent grade

c. Hydrochloric acid - Reagent grade

d. Magnesium standard solutions - Weigh 1.6920 g of magnesium oxide, ACS reagent grade, into a 1 liter volumetric flask, dissolve in 5 ml of hydrochloric acid and make to volume with distilled water. One ml of this solution contains 1000 micrograms (ug) of magnesium. Transfer 10 ml of the solution into a 100 ml volumetric flask and make to volume. One milliliter of this solution contains 100 ug of magnesium. Prepare working standards daily containing 0, 3, and 6 ug/ml magnesium by placing appropriate aliquots of the 100 ug/ml magnesium into 100 ml volumetric flasks. Add 50 ml of a 2000 ug/ml strontium solution (prepared by dissolving 4.83 g Sr $(NO_3)_2$ in 1 liter distilled water) to each 100 ml volumetric so that the magnesium standards contain 1000 ppm Sr.

4.5.4.3 Standardization.

a. Determine absorbance value for each standard solution using the following atomic absorption conditions:

Wavelength - 285 nm
Slit setting - o.5 nm
Light source - Hollow cathode lamp, magnesium
Flame - Air-acetylene

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

b. Run a reagent blank.

c. Prepare a calibration curve by plotting the absorbance corrected for the reagant blank reading against the concentration of magnesium for each standard.

4.5.4.4 Procedure.

a. Weigh 0.6 - 0.8 gm of triphenyl bismuth into a 25 ml volumetric flask.

b. Add 5 ml of nitric acid and let the sample digest for 5 minutes at room temperature.

c. Add 5 ml of perchloric acid and carefully digest the sample with heat as needed. The digestion is complete when the solution is a light yellow color.

d. Cool and add 12.5 ml of 2000 ug/ml Sr solution. Dilute to volume with distilled water.

e. Determine the absorbance value using the same conditions as for the standards.

f. Run a reagent blank the same as the samples and subtract this intensity from that of each sample.

g. Determine the concentration of magnesium from the calibration curve.

h. Calculate the ppm magnesium as follows:

$$\text{ppm magnesium content} = \frac{\text{(Observed ug/ml in sample solution x (25)}}{\text{Sample weight in grams}}$$

4.5.5 Total halides. The total halide content shall be determined as follows:

4.5.5.1 Apparatus.

a. Laboratory glassware.

b. Magnetic stirrer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.5.5.2 Reagents.

a. Nitric acid - Reagent grade

b. Acetone - Technical grade

c. Chloride standard solution - Weigh 0.165 g of sodium chloride into a 1-liter volumetric flask, dissolve and make to volume with distilled water. One milliliter of this solution contains 0.1 mg of Cl.

d. Silver nitrate solution - Dissolve 1.7 g of silver nitrate in 100 ml of distilled water to prepare an approximate 0.1 N solution.

4.5.5.3 Procedure.

a. Weigh 0.20 g of triphenyl bismuth into a 50 ml beaker.

b. Mix 25 ml distilled water with 2 ml acetone and add to the sample.

c. Mix on a magnetic stirrer for 15 minutes.

d. Filter the sample solution into a 50 ml beaker.

e. Add 1 ml of nitric acid and 1 ml of silver nitrate solution.

f. Prepare a blank using 1 ml of standard Cl solution and compare with the sample.

g. After 5 minutes, if the turbidity of the sample is less than or the same as the blank, report the sample as containing not more than 0.05 percent total halides as chloride. If the turbidity of the sample is greater than the blank, report the sample as containing more than 0.05 percent total halides as chloride.

4.5.6 Infrared spectrum. An infrared spectrum shall be obtained using a procedure which has had prior approval of the Contracting Officer. ASTM E168 shall be used as a basis of the procedure.

4.5.7 Workmanship. Visually examine the sample for contamination or foreign matter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging and Packing.

5.1.1 Level A. - When applicable packaging shall be as specified in the contract.

5.1.2 Level B. - Unless otherwise specified in the contract, packaging and packing shall be in accordance with the standard commercial practice applicable to the type of material. The packaging and packing shall be of such construction and materials that the contents will be adequately protected against damage, loss, or contamination when shipped from the contractor or supply source to the receiving activity, or stored for one year from the date of manufacture. Container size/capacity shall be as specified in the contract. The type of containers and packing materials selected shall comply with applicable carrier rules and regulations. In addition, any hazardous material must be packed and shipped in accordance with the Code of Federal Regulations (CFR), Title 49, Parts 100-199, and also when offered from overseas shipment, the United Nations-Transport of Dangerous Goods (Recommendations of the Committee of Experts on the Transport of Dangerous Goods). It shall be the responsibility of the supplier to obtain all data necessary from DOT, and if applicable, from the Committee of Experts on the Transport of Dangerous Goods (UN-Transport of Dangerous Goods) to ship hazardous materials legally.

5.1.3 Level C. - Same as Level B, except not authorized for overseas shipment and that the United Nations-Transport of Dangerous Goods does not apply.

5.2 Marking. In addition to any special marking required by the contract, each container shall be marked in accordance with MIL-STD-129, the Code of Federal Regulations, (CFR) Title 49, Parts 100-199, and the United Nations-Transport of Dangerous Goods (Recommendations of the Committee of Experts on the Transport of Dangerous Goods). Marking shall include but not be limited to, the following information:

a. Title, Number and Date of this Specification

b. Manufacturer's Name and Location

c. Material Trade Name

d. Net Weight and Volume

e. Lot Number, Batch Number(s), and Date of Manufacture

f. Storage Conditions/Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

g. Toxicity Precautions, if applicable

h. Contract Number

i. Warranty Provisions

6. Notes.

6.1 Intended use. The triphenyl bismuth is intended for use in the M864 propellant.

6.2 Ordering data. See MIL-A-48078 (AR).

6.3 Equivalent test methods. The test methods given in this specification are the official methods to be used. The contractor may request using other methods providing that the proposed method is equivalent (accuracy and precision) to the method given in this specification. Prior approval of the Contracting Officer is required for use of equivalent test methods. A description of the proposed method should be submitted through the Contracting Officer to: Commander, AMCCOM, ATTN: AMSMC-QAR-R, Picatinny Arsenal, NJ 07806-5000. This description should include, but not be limited to, the procedures used, the accuracy and precision of the method, test data to demonstrate the accuracy and precision and drawings of any special equipment required (see MIL-I-45208).

6.4 Subject term (key word) listing.

Propellant
Cure modifier
Projectile

Custodian
Army-AR

Preparing activity
Army-AR

(Project 6810-A015)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARDEC
ATTN AMSMCOQA
PICATINNY ARSENAL, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-70681	TRIPHENYL BISMUTH

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

(FOLD ON THIS LINE, CUT ALONG THIS LINE.)