MIL-D-40631G
31 December 1984
SUPERSEDING
MIL-D-0040631F
14 October 1977

MILITARY SPECIFICATION

DISPENSERS, TABLEWARE, SELF-LEVELING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers self-leveling, dispensers for tableware, trays and racks.

1.2 Classification. The dispensers shall be of the following types, designs, styles, sizes and models, as specified (see 6.2):

Type I - Dish dispenser, heated (plates, bowls and oval platters)

Design A - Enclosed cabinet
Design B - Open tubular frame
Design E - Drop-in installation

Style 1 - One dispenser unit (for capacities, see table I)
Style 2 - Two dispenser units (for capacities, see table I)
Style 3 - Three dispenser units (for capacities, see table I)
Style 4 - Four dispenser units (for capacities, see table I)

Size 4 - 4-3/4 inch diameter plate
Size 5 - Soup or salad bowls, 5-5/8 inch and 5-9/16 inch diameter

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7320

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

Size 6 - Oval platter, 5-3/4 inch by 4-1/2 inch
Size 7 - 6-3/4 inch diameter plate
Size 9 - 9 inch diameter plate

Type II - Cup, tumbler and bowl dispenser, unheated

Design B - Open tubular frame
Design C - Cantilever carrier
Design E - Drop-in installation

Size 1 - 16 inch by 16 inch racks
Size 2 - 20 inch by 20 inch racks
Size 3 - Two stacks of 10 inch by 20 inch racks
Size 4 - One stack of 10 inch by 20 inch racks

Type III - Tray dispenser, unheated

Design B - Open tubular frame
Design C - Cantilevered carrier
Design E - Drop-in installation

Size 1 - 15-1/4 inch by 20-1/2 inch tray
Size 2 - 16 inch by 20 inch tray
Size 3 - 14 inch by 18 inch tray
Size 4 - 12 inch by 16 inch tray

Type IV - Cup and saucer dispenser, unheated (for cups in 20 inch by 20 inch racks and 5-7/8 inch diameter saucers in dispenser units)

Design B - Open tubular frame
Design D - Enclosed column with cantilevered carrier

Style 2 - Two saucer dispenser units
Style 3 - Three saucer dispenser units

Type VI - Dish dispenser, unheated (plates, bowls, and oval platters.)

Design A - Enclosed cabinet
Design B - Open tubular frame
Design E - Drop-in installation

Style 1 - One dispenser unit
Style 2 - Two dispenser units
Style 3 - Three dispenser units
Style 4 - Four dispenser units

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

Size 4 - 4-3/4 inch diameter plate
Size 5 - Soup or salad bowls, 5-5/8 inch and 5-9/16 inch diameter
Size 6 - Oval platter, 5-3/4 inch by 4-1/2 inch
Size 7 - 6-3/4 inch diameter plate
Size 9 - 9 inch diameter plate

Model A - Mobile (casters)
Model B - Base mounted, fixed installation
Model C - Wall mounted

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-591 - Boxes, Shipping, Fiberboard, Wood-Cleated
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple Wall
PPP-T-60 - Tape: Packaging, Waterproof

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 167 - Chromium Nickel Steel, Stainless and Heat Resisting Plate, Sheet, and Strip
A 276 - Stainless and Heat-Resisting Steel Bars and Shapes
A 554 - Tubing Mechanical, Welded Stainless Steel
D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

UNDERWRITERS LABORATORIES INC.

UL 197 - Commercial Electric Cooking Appliances

(Application for copies should be addressed to Underwriters Laboratories Inc., 333 Pfingsten Road, Northbrook, IL 60062.)

NATIONAL SANITATION FOUNDATION (NSF)

Listing of Food Service Equipment

Standard No. 2 - Food Service Equipment
Standard No. 4 - Electric Commercial Cooking and Warming Equipment.

(Application for copies should be addressed to the National Sanitation Foundation, Building, Ann Arbor, MI 48105.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Standard product. The dispensers shall, as a minimum, be in accordance with the requirements of this document and shall be the manufacturer's standard commercial product with any added features needed to comply with the requirements of this document. Modifications to add features shall not incorporate different parts unless such parts are used on other current commercial models. Standard or modified commercial products furnished in accordance with this document shall be identifiable by all regular

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

manufacturer's or commercial service organizations servicing the brand involved. Service organizations shall be capable of providing complete parts and repair services on models furnished to the Government consistent with their normal commercial practices.

3.2 Codes and standards. The type II, III, IV, and VI dispensers shall conform to the applicable requirements of NSF Standard No. 2. The type I dispensers shall comply with the applicable provisions of UL 197 and NSF Standard No. 2 or 4.

3.2.1 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the dispensers he proposes to furnish under this document meet the applicable requirements of UL 197 and NSF Standard No. 2 or 4.

3.2.1.1 NSF. Acceptable evidence of meeting the requirements of NSF shall be:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" and display of the NSF seal on the finished dispenser, or

(2) A certification for the dispenser issued by NSF under their special one-time contract evaluation/certification service, or

(3) A test report, acceptable to the Contracting Officer with the advice of the Army Surgeon General from an independent testing laboratory, indicating that the dispensers have been tested and conforms to NSF.

3.2.1.2 UL. Acceptable evidence of the type I dispensers complying with requirements of UL shall be the UL listing mark, or a certified test report from a recognized independent testing laboratory acceptable to the Government, indicating that the dispensers offered have been tested and conform to UL 197.

3.3 Materials (see 6.3) and components. Materials and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial dispensers provided the completed item complies with all provisions of this document.

3.3.1 Stainless steel.

3.3.1.1 Sheet and strip. Stainless steel sheet and strip shall conform to ASTM A 167.

3.3.1.2 Tube. Stainless steel tube shall conform to ASTM A 554.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

3.3.1.3 Angles and bar. Stainless steel angles and bar shall conform to ASTM A 276.

3.4 Design. The dispensers shown in figures 1 through 8 herein are for illustrative purposes only and are not intended to exclude procurement of dispensers otherwise meeting all applicable requirements of this document. The tableware items, trays and racks shown in the figures are illustrative also and shall not be furnished with the dispensers. All mobile dispensers shall be mounted on four casters as specified in 3.6 and shall be equipped with bumpers as specified in 3.7. The dispensers shall show no evidence of parts failure, weld failure, parts separation, breakage or permanent deformation when static load tested as specified in 4.4.1. For the wall mounted model static load test, the dispenser shall be mounted as specified in the mounting instructions to be furnished with the dispensers. The mobile dispensers and silverware holders, when applicable, shall show no evidence of parts failure, weld failure, parts separation, breakage or permanent deformation when obstacle tested as specified in 4.4.2. Dispensing tubes shall be removable and fabricated of stainless steel and properly sized for the dishes to be dispensed. Tubes shall be equipped with dish guides to position dishes into tubes. All dispensing units shall maintain the load of tableware, trays, or racks as applicable up to maximum capacity at the correct dispensing level and the dispensing mechanism shall operate without evidence of binding when operationally tested as specified in 4.4.3. All mobile dispensers shall remain in an upright stable position when stability tested as specified in 4.4.5. An accessible means shall be provided on each dispenser for adjustment of the self leveling mechanism or replacement of the springs as applicable to compensate for various loads. Adjustment shall be accomplished without special tools. The overall height of all mobile dispensers shall be 37 inches ± 3 inches, except that for dispensers equipped with silverware holders (see 3.4.3, 3.4.4, and 3.8), the overall height shall be 49 inches ± 3 inches. The cabinet top height of the fixed base mounted dispensers shall be 34 inches ± 1/2 inches. The overall height of the wall mounted dispensers shall be 34 inches ± 3 inches. When specified (see 6.2) dispenser shall be supplied with silverware holder conforming to 3.8.

3.4.1 Models. The dispensers shall be designed for mobile (casters) use, for fixed (base mounted) installation, or for wall mounted use, as specified. For fixed (base mounted) installation dispensers, the base of the dispenser shall be provided with means for attaching the dispenser to a floor of the type specified (see 6.2). For the wall mounted dispensers, mounting brackets, if necessary, and instructions for mounting shall be provided for the type of wall specified (see 6.2).

3.4.2 Dish dispensers, type I. The type I dispensers shall be heated as specified in 3.11 and shall be design A, B or E. The design A dispenser (see figure 1) shall be a heated enclosed cabinet. The design B dispenser (see

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the currentversion before use.

figure 2) shall be open tubular frame construction with heated dispensing tubes. The design E dispenser shall be a single heated tube. Style 1 shall have one dispensing tube. Style 2 shall have two dispensing tubes. Style 3 shall have three dispensing tubes. Style 4 shall have four dispensing tubes. The dispensing tubes shall be cylindrical units. The number of tubes or integral units, types, nominal sizes of dishes to, be dispensed, and the dish capacities of the dispensers shall be as specified in table I. The dispensing mechanism shall be calibrated to dispense dishes of the shape (oval or round), dimensions, weights and heights specified (see 6.2).

TABLE I. Number of tubes, type and size of dish, inside dimension of tubes and capacities, type I design A and B

Style & Size	No. of disp. tubes	Type of dish	Nominal dish size inch	Dish capacity			
				Style 1	Style 2	Style 3	Style 4
Style 1	1	-	-	-	-	-	-
Style 2	2	-	-	-	-	-	-
Style 3	3	-	-	-	-	-	-
Style 4	4	-	-	-	-	-	-
Size 4	-	Plater	4-3/4 dia	68	136	204	272
Size 5	-	Soup bowls	5-5/8 dia	30	60	90	120
		Salad bowls	5-9/16 dia	30	60	90	120
Size 6	-	Oval platter	5-3/4 x 4-1/2 oval	68	136	204	272
Size 7	-	Plate	6-3/4	68	136	204	272
Size 9	-	Dinner plate	9 dia	68	126	204	272

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

3.4.3 Cup, tumbler and bowl dispenser, type II. The type II dispensers shall be unheated and shall be designed to dispense cups, tumblers, or bowls contained in racks. Size 1 shall be for 16 inch by 16 inch racks, size 2 shall be for 20 inch by 20 inch racks, size 3 shall be for two stacks of 10 inch by 20 inch racks, size 4 shall be for one stack of 10 inch by 20 inch racks. Size 1, 2 and 4 dispensers shall have a minimum capacity 6 racks while size 3 shall have a minimum capacity of 12 racks. The design B dispenser for mobile (see figure 3) and fixed base shall consist of a tubular frame superstructure mounted on an enclosed mobile or fixed base platform. The design C dispenser for mobile (see figure 4) and fixed base mounted shall consist of a cantilevered type carrier, mounted on either an open or closed mobile or fixed base platform. The design E dispenser shall be for drop-in installation. The racks containing the dishes shall be maintained at a predetermined self-leveling dispensing level through the action of calibrated springs counteracting the the weight of the loaded racks. For mobile dispensers, provisions shall be made to store empty racks on the base platform.

3.4.4 Tray dispensers, type III. The type III dispensers shall be unheated and shall be either design B, open tubular frame (see figure 5), design C, cantilevered carrier (see figure 6) or design E for drop-in installation and shall be similar in design and function to the type II dispensers, except that they shall hold and dispense not less than 80 plastic serving trays for size 1 and 2 dispensers and 100 plastic serving trays for size 3 and 4 dispensers. The size 1 shall dispense 15-1/4 inch by 20-1/2 inch trays, the size 2 shall dispense 16 inch by 20 inch trays, the size 3 shall dispense 14 inch by 18 inch trays and the size 4 shall dispense 12 inch by 16 inch trays. The dispensing mechanism shall be calibrated to dispense trays of the weights and heights specified (see 6.2).

3.4.5 Cup and saucer dispenser, type IV. The type IV dispenser shall be unheated and designed to dispense cups from racks and saucers from dispensing tubes, and shall be design B (see figure 7) open tubular frame or design D (see figure 8) enclosed column with a cantilevered carrier. The type IV design B cup dispensing section shall be similar in design and function to the type II, design B dispenser and the saucer dispensing section shall be similar to the type I, design B dispenser except that the dispensing units shall be unheated. The type IV design D cup dispensing section shall be similar in design and function to the type II, design C dispenser and the saucer dispensing section shall be similar to the type I, design A dispenser except that the dispenser units shall be unheated. The number of dispensing tubes, nominal saucer diameters, and cup and saucer capacities, shall be as specified in table II. The cup dispensing section shall accommodate 20 inch by 20 inch racks. Cups to be used are 10-1/2 ounce capacity with an outside diameter of 3-19/32 inches and a height of 3-25/64 inches. The saucer dispensing mechanism shall be properly sized for and calibrated to dispense saucers of the diameter, height, and weight specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

TABLE II. No. of tubes, saucer diameters, cup and saucer capacities for type IV, design B, D and E dispensers

Style	No. of disp. tubes	Nominal saucer diameter	Cup capacity	Saucer capacity
2	2	5-7/8 inch	144	144
3	3	5-7/8 inch	144	216

3.4.6 Dish dispenser, unheated, type VI. The type VI dispensers shall be unheated and shall be design A, B, or E, style 1, 2, 3 or 4 and shall be similar to type 1 except unheated. The design A shall be enclosed cabinet. The design B dispenser shall be open tubular frame. The design E dispenser shall be for drop-in installation. The number of tubes or integral units, nominal dish size and dish capacities shall be as specified in table I. The dispensing mechanism shall be calibrated to dispense dishes of the shape (oval or round), dimensions, weights and heights specified.

3.5 Construction. Stainless steel and corrosion-resisting components shall conform to the applicable requirements of 3.3.1.1, 3.3.1.2 and 3.3.1.3. Open tubular frame units shall consist of 1" O.D. stainless steel tube or may be a combination of 1" O.D. stainless steel tube and 1/2" O.D. stainless steel rod. The tubular frame shall be welded to the base. Rack and tray dispensers shall have provisions for storing empty racks or trays on the base of the unit. Cabinet enclosure, tops shall be a minimum of 16 gauge and sides shall be a minimum of 18 gauge stainless steel sheet. Column enclosures shall be a minimum of 14 gauge stainless steel sheet. Column enclosures may be a minimum of 22 gauge stainless steel sheet if internally supported. Unless otherwise specified (see 6.2), drop in dispensers shall fit the size opening recommended by the manufacturer. All drop-in type dispensers shall have a flange to fit over the counter opening.

3.6 Casters. Casters for all model A dispensers shall be 5" diameter, swivel type with a minimum load rating of 125 pounds per caster. Two of the casters on each dispensers shall be equipped with brakes. Casters shall be removable.

3.7 Bumpers. All model A dispensers shall be equipped with bumpers. Bumpers shall be of a non-marking resilient material and shall contain a vertical wall before any other part of the dispenser. Bumpers shall be removable.

3.8 Silverware holders. Each silverware holder shall house and be supplied with light plastic or stainless steel silverware cylinders. The silverware holder shall be fabricated from stainless steel and shall not extend beyond the dimensions of the dispenser. The height of the dispenser with silverware

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

holder assembled, shall not exceed the overall height specified. The silverware holder shall be mounted on the dispenser in such a manner as not to exhibit any damage when tested as specified in 4.4.2.

3.9 Battens. When specified (see 6.2), dispensers for marine use shall be equipped with integral battens to prevent toppling of trays, racks etc.

3.10 Power supply. Unless otherwise specified (see 6.2) type I dispensers shall be designed to operate on 120V, 60Hz, 1 Ph power.

3.11 Heating system. The heating system for type I dispensers shall be capable of maintaining dishes at 140°F ± 10°F when tested as specified in 4.4.5.

3.12 Power cord. The power cord for type I dispensers may be permanently attached to the unit or may be a separate component to plug into the power cord receptical. The power cord for type I dispensers designed for 120V, 60Hz, 1 Ph power, shall be equipped with a NEMA 5.15 P plug.

3.13 Workmanship. The finished dispensers shall be complete and clean, and free of fabrication marks, scratches, dents, breaks, sharp edges, sharp corners, deformities, burrs, slivers, or visible evidence of rust.

3.13.1 Rivets. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and shall be in full contact with the joined metal surfaces. There shall be no empty rivet holes.

3.13.2 Welds. Welds shall be clean, continuous, sound, free of flux, pits, buildups, undercuts, and shall be ground so as to blend with adjacent surfaces. Spot welds when used shall be sound and free of discoloration, splatter and burn throughs.

3.13.3 Threaded fasteners. Threaded fasteners shall be drawn tight. Lockwashers shall be used on all nuts and bolts. There shall be no crossed or stripped threads.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.2 End item visual examination. The end item shall be examined for the defects listed in table III. The lot size shall be expressed in units of dispensers. The sample unit shall be one completely fabricated and assembled dispenser. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

TABLE III. End item visual defects

Examine	Defect	Classification Major	Minor
Design	Not manufacturer's standard product.	X	
Workmanship, general	Any component missing.	X	
	Dirty.	X	
	Fabrication marks, scratches, dents, breaks, sharp edges, sharp corners, burrs, slivers, rust.	X	
Rivets	Heads not round and concentric.		X
	Heads not in full contact with joined metal surfaces.		X
	Loose, or empty rivet holes.	X	
Welds	Not continuous, not sound, not ground to blend with adjacent surfaces.	X	
	Pits, build ups, undercuts.	X	
	Dirty, flux not removed.		X
Spot welds	Discoloration, splatter.	X	
	Burn through, unsound.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Threaded fasteners	Loose.		X
	Lockwashers missing, crossed or stripped threads.	X	
Design, general	Not design specified.	X	
Casters	Not mounted on four casters.	X	
	Not removable.	X	
	Brakes missing.	X	
	Not swivel	X	
Bumpers	Missing, not as specified.	X	
	Not removable.	X	
Silverware holders (when specified for types II and III)	Missing.	X	
	Not number of containers specified.	X	
	Not supplied with cylinders	X	
Battens (when specified)	Missing, not types specified	X	
Adjustment	Self leveling mechanism not adjustable.	X	
Service access	Access not provided for adjustment of leveling mechanism.	X	
Dish guides	Missing	X	
Type I dispensers	Power cord missing; not type specified.	X	
	Heating system missing	X	
Design A	Not enclosed cabinet	X	
Design B	Not tubular frame construction.	X	
	Dispenser tubes not heated	X	
Design E	Not equipped with flange to fit over counter opening	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Type II and III and IV dispensers	No provision to store empty racks or trays	X	
Design B	Frame not constructed of stainless steel tube.	X	
	Base platform not closed.	X	
	Rack or tray positioning provisions not provided on the carrier platform.	X	
	Reinforcing bars or tubes not as specified or missing.	X	
Type II and III dispensers			
Design C	Column not enclosed.	X	
Design E	Not equipped with flange to fit over counter opening.	X	
Type IV, design B	Saucer dispenser tubes missing.	X	
Type IV, design D	Saucer dispenser tubes missing.	X	
Type VI dispensers	Not enclosed cabinet.	X	
	Accessable means not provided for self-leveling mechanism adjustment.	X	
Design A	Accessable means not provided for self-leveling mechanism adjustment.	X	
Design B	Not tubular frame construction.	X	
Design E	Not equipped with flange to fit over counter opening.	X	
Marking for identification	Missing, incorrect, illegible, or incomplete.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

4.2.3 End item dimensional examination. The end item shall be examined for conformance to specified dimensions. Any dimension not as specified shall be classified as a defect. The lot size shall be expressed in units of dispensers. The sample unit shall be one dispenser. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.2.4 End item testing. One dispenser from the lot shall be tested as specified in 4.4.1 through 4.4.5, as applicable. Failure of any test shall be cause for rejection of the lot.

* 4.2.5 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Markings (exterior)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application.
Workmanship	Contents of shipping containers not immobilized, cushioned, blocked, braced or waterproofed as specified. Bulged or distorted container.
Materials	Component missing, damaged, or otherwise defective.

4.3 Certificate examination. Certificates of compliance, certified test reports, or listing marks for codes and standards, as applicable, that are submitted as proof of compliance with the document requirements shall be examined and validated.

4.4 Methods of inspection.

4.4.1 Static load test. The dispensers shall be loaded with a weight of not less than 200 percent of the total weight of all items representing its total capacity. The weight shall be equally distributed among the dispensing tubes or dispensing racks or trays, as applicable, and shall remain in place for not less than 10 minutes. The dispenser shall then be examined, the load

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

removed, and the dispenser re-examined to determine compliance with 3.4. Any nonconformance shall constitute failure of this test.

4.4.2 Obstacle test. The dispenser shall be loaded to capacity or with a uniformly distributed weight equal to its total capacity. The loaded dispenser shall be rolled over an obstacle with vertical faces 1/4 inch high. a total of 5 times, at speed of about 3 feet per second. The dispenser shall then be examined for compliance with 3.4. Any nonconformance shall constitute failure of the test. When type II or type III dispensers are equipped with silverware holders the eight silverware containers shall be completely filled with assorted silverware or weights equivalent to the silverware. The loaded dispenser with loaded silverware holder shall be rolled over the 1/4-inch high obstacle. The dispenser and silverware holder shall be examined for compliance with 3.4. Any nonconformance shall constitute failure of this test.

4.4.3 Operational test. The dispensing units shall be fully loaded with the applicable load of tableware, trays, or racks. The dispensing mechanism shall then be set at the proper height and the items removed one at a time while observing to determine compliance with the correct level and non-binding requirement of 3.4. In addition the dispensing units shall be loaded with tableware, trays or racks to half their capacity. Manual pressure shall be applied so that the carrier platform deflects 5 inches at which time the pressure shall be quickly removed. This test shall be repeated ten times and the unit examined for compliance with 3.4. Any nonconformance shall constitute failure of this test.

4.4.4 Temperature control and retention test. The type I (heated) dispenser shall be loaded to full capacity with the applicable dishes and connected to the electric power source. The unit shall be turned "on" and allowed to heat for one hour. The surface temperature of a dish, midway in the stack, shall then be measured to determine compliance with section 3.

4.4.5 Stability test. Mobile dispensers with silverware holders when applicable, loaded to 1/2 rated capacity shall be rolled onto a smooth inclined surface having a 1 inch rise in 10 inch length. The brakes shall be applied and the wheels shall otherwise be prevented from swiveling. Failure of the dispenser to comply with 3.4 when each of the four sides are exposed to the shape, shall constitute failure of the test.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. The cord for the type I cabinet dispenser shall be coiled and the free end placed in the recess at the control panel. The recessed

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

opening shall then be completely sealed with tape. The cord for the type I tubular frame dispenser shall be coiled, and the coil and free end secured in an unused portion of the dispenser with tape. The tape as specified herein, shall conform to type III or IV of PPP-T-60. The moveable section of the dispenser shall be locked or blocked and secured in the top position.

5.1.2 Commercial. The dispensers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. Each dispenser, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, grade V2s of PPP-B-636, or overseas type, style A, B, or J, grade A or B, type 3 load of PPP-B-601; or class 2, style 2 or 4, grade A or B. type 3 load of PPP-B-621. Each dispenser shall be blocked, braced, and cushioned in accordance with the applicable requirements of MIL-STD-1186. When applicable, each dispenser with non-detached casters shall be blocked to provide a minimum 1 inch clearance from the interior surface of the base of the container and the casters. Each fiberboard container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Each dispenser in shipping containers other than PPP-B-636 shall be waterproofed with a case liner as specified in MIL-STD-1186 and the container closed and strapped in accordance with the appendix of the applicable container specification.

5.2.2 Level B packing. Each dispenser, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636; or class I, style A or B of PPP-B-591, or domestic type, style A or B, grade B of PPP-B-601; or class 1, style 2 or 4, grade B of PPP-B-621; or class 1, style E of PPP-B-640. Each dispenser shall be blocked, braced and cushioned in accordance with the applicable requirements of MIL-STD-1186. When applicable, each dispenser with non-detached casters shall be blocked to provide a minimum 1 inch clearance from the interior surface of the base of the container and the casters. Each PPP-B-636 fiberboard shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636. Each shipping container, other than the PPP-B-636 container, shall be closed in accordance with the appendix of the applicable container specification.

5.2.2.1 Weather-resistant fiberboard shipping container. When specified (see 6.2), the fiberboard shipping container specified in 5.2.2 shall be grade V3s or V4s; grade V3c, V3s or V4s; or class 2 fiberboard box fabricated in accordance with PPP-B-591, PPP-B-636 or PPP-B-640, respectively, and closed in accordance with the appendix of the applicable container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial packing. Dispensers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The dispensers are intended for use in handling, storage, and dispensing of tableware, trays, and racks in dining halls and mess halls.

6.2 Ordering data. Acquisition document should specify the following:

a. Title, number, and date of this document.
b. Type, design, style, size and model dispenser required (see 1.2).
c. Type of floor for fixed installation base mounted dispenser (see 3.4.1).
d. Type of wall for mounting wall dispensers (see 3.4.1).
e. When dispensers are to be equipped with silverware holders (see 3.4).
f. When power supply requirement is other than specified for type I dispensers (see 3.10).
g. When size opening for the design E drop-in installation, dispenser is other than recommended by the manufacturer (see 3.5).
h. When battens are required for Marine model (see 3.9).
i. Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
j. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
k. The following information must be furnished the contractor to assure proper calibration and adjustment of the dispensing mechanisms.

Type I, sizes 4, 5, 7 and 9 - Diameter and height of one item. Height of 11 stacked items. Weight of 10 items.

Type I, size 6 - Length and width of one item. Height of 11 stacked items. Weight of 10 items.

Type II - Length, width, height and weight of one fully loaded rack of cups, tumblers, or bowls, as applicable.

Type III - Length, width and height of one tray. Height of 11 stacked trays. Weight of 10 trays.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

ll then be completely sealed with tape. The cord for the type I me dispenser shall be coiled, and the coil and free end secured in ortion of the dispenser with tape. The tape as specified herein, rm to type III or IV of PPP-T-60. The moveable section of the hall be locked or blocked and secured in the top position.

mmercial. The dispensers shall be preserved in accordance with .

ing. Packing shall be level A, B, or Commercial as specified (see

6.
cont
in t
acti

6.

when

6.
to i
exte

Cust

Ari
Na
Ai

Revi

Ari
Na
Ai
DL

User

Na

vel A packing. Each dispenser, preserved as specified in 5.1, cked in a snug-fitting shipping container conforming to style RSC, f PPP-B-636, or overseas type, style A, B, or J, grade A or B, type PP-B-601; or class 2, style 2 or 4, grade A or B. type 3 load of Each dispenser shall be blocked, braced, and cushioned in accord- he applicable requirements of MIL-STD-1186. When applicable, each ith non-detached casters shall be blocked to provide a minimum 1 nce from the interior surface of the base of the container and the ach fiberboard container shall be closed in accordance with method roofed in accordance with method V, and reinforced as specified in k of PPP-B-636. Each dispenser in shipping containers other than hall be waterproofed with a case liner as specified in MIL-STD-1186 tainer closed and strapped in accordance with the appendix of the container specification.

vel B packing. Each dispenser, preserved as specified in 5.1, cked in a snug-fitting shipping container conforming to style RSC, riety SW, or type SF, class domestic of PPP-B-636; or class I, 3 of PPP-B-591, or domestic type, style A or B, grade B of or class 1, style 2 or 4, grade B of PPP-B-621; or class 1, style E). Each dispenser shall be blocked, braced and cushioned in with the applicable requirements of MIL-STD-1186. When applicable, er with non-detached casters shall be blocked to provide a minimum ance from the interior surface of the base of the container and Each PPP-B-636 fiberboard shipping container shall be closed in with method II as specified in the appendix of PPP-B-636. Each tainer, other than the PPP-B-636 container, shall be closed in with the appendix of the applicable container specification.

eather-resistant fiberboard shipping container. When specified he fiberboard shipping container specified in 5.2.2 shall be grade grade V3c, V3s or V4s; or class 2 fiberboard box fabricated in ith PPP-B-591, PPP-B-636 or PPP-B-640, respectively, and closed in ith the appendix of the applicable container specification.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the currentversion before use.

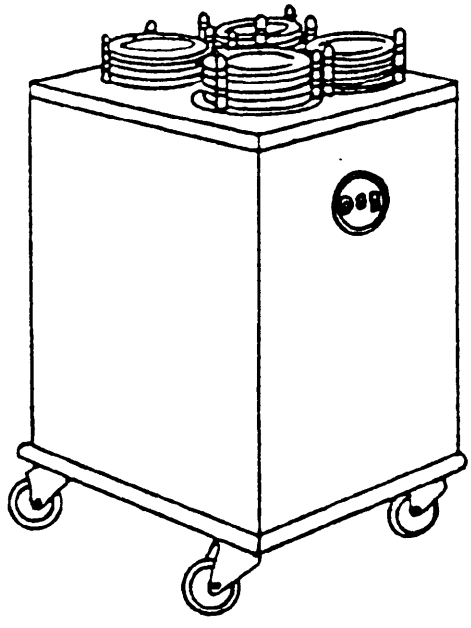


FIG. 1 TYPE I, DESIGN A

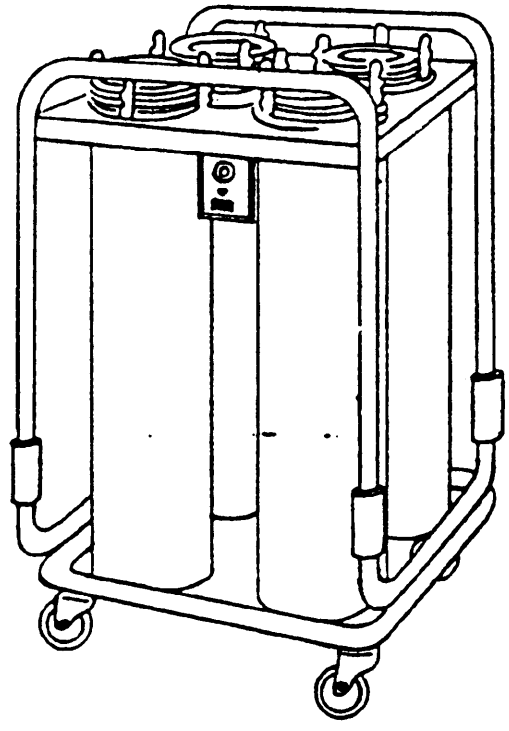


FIG. 2 TYPE I, DESIGN B



FIG. 3 TYPE II, DESIGN B

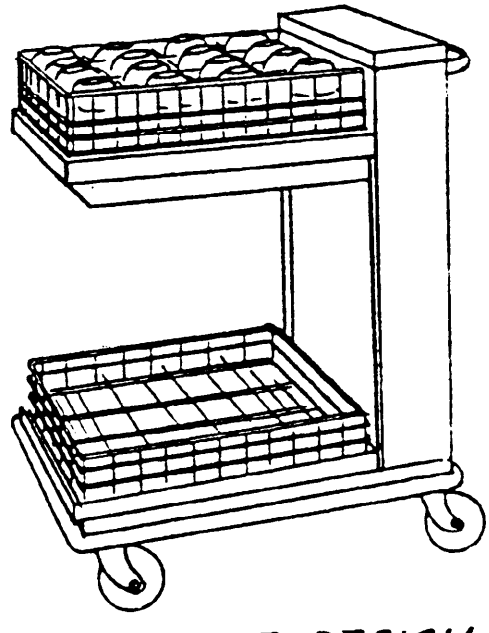


FIG. 4 TYPE II, DESIGN C

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

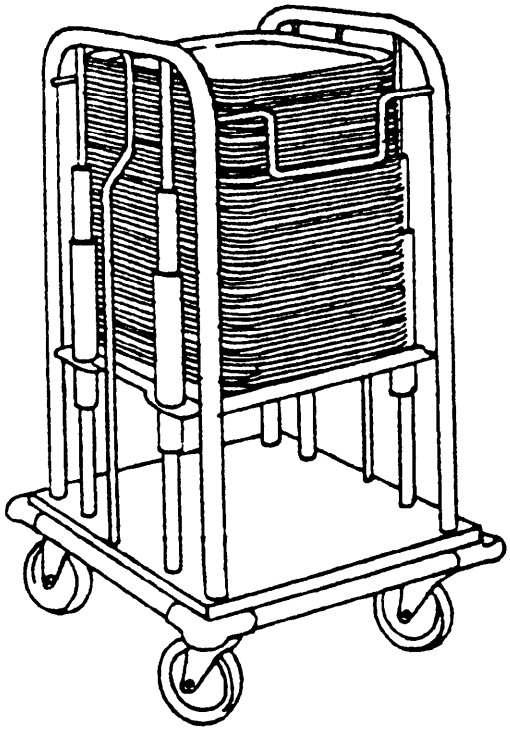


FIG. 5 TYPE III, DESIGN B

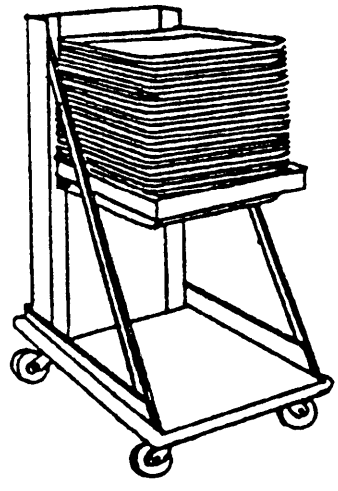


FIG. 6 TYPE III, DESIGN C

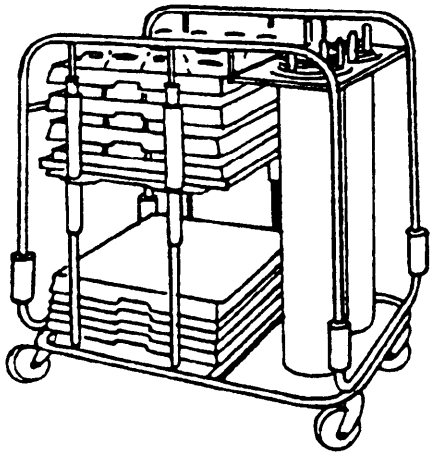


FIG. 7 TYPE IV, DESIGN B

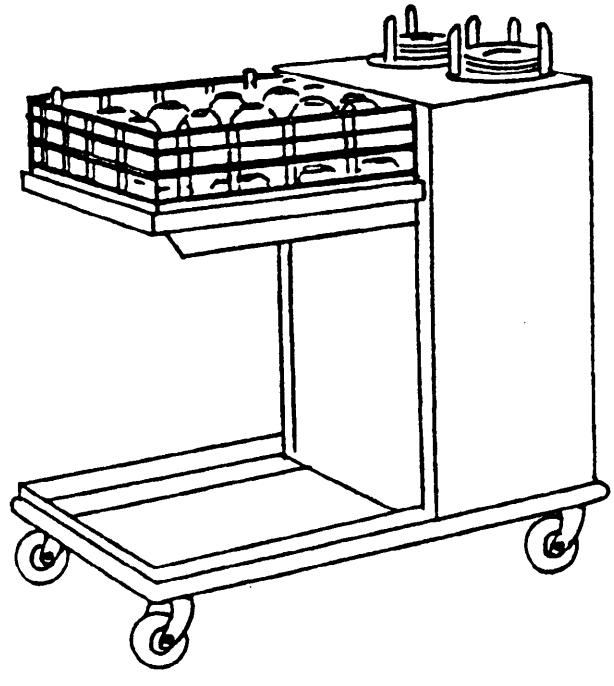


FIG. 8 TYPE IV, DESIGN D

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the currentversion before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US ARMY NATICK RESEARCH
and DEVELOPMENT CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research
and Development Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

Procurement Instrument Identification Number

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-D-40631	Dispensers, Tableware, Self-Leveling

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 20 Nov 84

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T19:28Z
Check the source to verify that this is the current version before use.