MIL-F-40165C

15 October 1969
SUPERSEDING
MIL-F-40165B
26 July 1966

MILITARY SPECIFICATION

FIELD PACK, CANVAS, COMBAT, M-1961

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size field pack fabricated from olive drab cotton duck and webbing.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

| | | |
|---|---|---|
| L-P-378 | - | Plastic Sheet and Strip (Polyolefin). |
| V-T-285 | - | Thread, Polyester. |
| UU-P-121 | - | Paper, Bond and Writing, White and Colored. |
| UU-P-268 | - | Paper, Kraft, Untreated, Wrapping. |
| CCC-C-419 | - | Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered. |
| CCC-D-950 | - | Dyeing and After-treating Processes for Cotton Cloths. |
| DDD-L-20 | - | Label; For Clothing, Equipage, and Tentage, (General Use). |
| PPP-B-636 | - | Box, Fiberboard. |
| PPP-F-320 | - | Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes. |

MILITARY

| | | |
|---|---|---|
| MIL-C-496 | - | Clips, End, Strap. |
| MIL-W-530 | - | Webbing, Textile, Cotton, General Purpose, Natural or in Colors. |

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

MIL-B-543 - Buckles, Tongueless and Web Strap.
MIL-H-9890 - Hardware, Individual Load Carrying Equipment: and Hardware Miscellaneous.
MIL-E-20652 - Eyelets, Metallic, with Washers.
MIL-C-40039 - Cloth, Coated, Nylon, Vinyl Coated.
MIL-T-43566 - Tape, Textile, Cotton, General Purpose, Natural or in Colors.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

DRAWINGS

U. S. ARMY NATICK LABORATORIES

2-3-117 - Field Pack, Canvas, Combat, M-1961; Assembly and Illustration.
2-3-118 - Field Pack, Canvas, Combat, M-1961; Sections.
2-3-119 - Field Pack, Canvas, Combat, M-1961; Detail "A".
2-3-120 - Field Pack, Canvas, Combat, M-1961; Detail "B".

(Figures 1 through 4 are miniature reproductions of referenced drawings and are attached for information only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, ATTN: Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples.-

* 3.1.1 Guide samples.- Guide samples of the end item, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

* 3.1.2 First article.- When specified (see 6.2), before production is commenced, a sample of the finished field pack shall be submitted to or made ready for the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facility to be used for the manufacture of the production item.

3.2 Materials.-

3.2.1 Cloth, duck, cotton.- The cloth, before finishing, shall be No. 10 hard texture conforming to type I of CCC-C-419.

3.2.1.1 Color and treatment.- The cloth shall be dyed Olive Drab 7 to match the standard sample (see 6.3) and shall conform to type I, class B of CCC-D-950.

* 3.2.2 Tape, cotton.- The tape shall be dyed Olive Drab 7 to match the standard sample (see 6.3) and shall conform to type I, class 4, 1/2 inch, 3/4 inch, 1 inch, and 2 inch widths of MIL-T-43566.

3.2.3 Webbing, cotton.- The webbing shall be dyed Olive Drab 7 to match the standard sample (see 6.3) and shall conform to type IIb, class 4, 5/8 inch, 1 inch and 2-1/4 inch widths of MIL-W-530.

3.2.4 Thread, polyester.- The thread shall conform to type I, class 1, sub-class B of V-T-285. Sizes shall be as follows:

| | |
|---|---|
| For all stitching, except bartacking | Size FF |
| For bartacking | Size E |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

3.2.4.1 Color.- The thread shall be dyed Olive Drab S-1 (C.A. 66022) and shall show fastness to chlorine bleaching equal to or better than the standard sample (see 6.3). If no standard sample is available, the thread shall show good fastness to chlorine bleaching.

3.2.5 Film, polyethylene, unsupported, flexible.- The film shall conform to the requirements for 0.0060 inch thick film; type I; class 1; grade A, B, or C; finish 1 of L-P-378 except that the film thickness shall be 0.020 inch. The moisture vapor transmission, impact resistance, and heat seal strength are not required.

3.2.6 Buckle.- The buckles shall be single bar with lip, conforming to type IV, class 1 or 3, size 5/8 inch of MIL-B-543.

3.2.7 Keeper, with slide.- The keepers shall conform to type X of MIL-H-9890.

3.2.8 Clip, end.- The end clips shall conform to type I, class 1, 5/8 inch of MIL-C-496.

3.2.9 Eyelets and washers.- The eyelets shall be size No. 4094 and the washers shall be size No. 4096 conforming to style A of MIL-E-20652.

3.2.10 Cloth, nylon, vinyl coated.- The coated nylon cloth shall conform to MIL-C-40039.

3.2.11 Instruction sheet.- A paper instruction sheet, to be furnished by the supplier, shall be placed in each field pack (see 5.1.1). The sheet shall be approximately 5-1/2 by 8-1/2 inches and shall conform to type IV of UU-P-121. The information on the instruction sheet shall be as follows:

ASSEMBLY INSTRUCTIONS FOR INDIVIDUAL LOAD CARRYING EQUIPMENT

NOTE: Complete instructions for Assembly and Use Concept are contained in FM 21-15, "Care and Use of Individual Clothing and Equipment".

1. Adjust Individual Equipment Belt so that it fits around the waist loose enough so as not to constrict the clothing.

(2 sizes) Under 30-inch waist - use medium belt.
30-inch waist and over - use large belt.

2. Attach Field Pack to Belt - Lay the belt out flat, back up, on the back of the field pack, with the male belt fastener to your right. Attach the field pack by means of attaching clips so that center of belt matches center of pack.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

3. Attach Suspenders to Field Pack and Belt - Attach back suspender straps to pack by engaging hooks on straps into eyelets of the two web tabs of the pack. Attach front suspender straps to belt by engaging hook of left strap into eyelet on left side of belt nearest the buckle, and hook of right strap into eyelet on right side of belt nearest the buckle.

(2 sizes) Under 68 inches tall - use regular size suspenders.
68 inches tall and over - use long size suspenders.

Extra long sizes of suspenders are available, if required for wear over extra long clothing or for large men.

4. Adjust Front and Back Suspender Straps - Put on assembled equipment and adjust front suspender straps so belt is properly located at waist. Remove equipment and adjust length of each back suspender strap so that belt hangs evenly, front and back.

5. Attach Intrenching Tool Carrier to Belt - Fasten on left side close to field pack, by means of two attaching clips on back of intrenching tool carrier.

6. Attach Canteen Cover to Belt - Fasten on right side close to field pack, by means of two attaching clips on back of canteen cover.

7. Attach Small Arms Ammunition Cases to Belt - Fasten one on the left side next to intrenching tool carrier and one on right side next to canteen cover, by means of two attaching clips on back of each case. Attach the supporting strap of each case to the metal loop on each suspender strap. Adjust length of each supporting strap so that it has the same amount of strain as the suspender strap next to it.

8. Attach Case for Compass or First Aid Dressing - Fasten to the belt on the right side next to ammunition case or on the left side next to other ammunition case.

9. Attach Bayonet Knife Scabbard to Intrenching Tool Carrier - Fasten the double hook on the back of the scabbard into the eyelets of the web hanger, located on the front of the carrier. Place the strap located on lower front of carrier, over the scabbard and close snap fastener.

10. Attach Hand Grenades to Small Arms Ammunition Cases - Attach hand grenades only to rear side of each ammunition case. Slide handle of hand grenade into slot of web attachment on side of case. Place web securing strap around top of grenade and fasten snap fastener.

11. Attach Sleeping Bag Carrier to Sleeping Bag - Roll sleeping bag compactly and tie with the sleeping bag footstraps. Lay the sleeping bag carrier out flat with the buckles of the two 1-inch wide securing straps away from you and the



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

inside facing up. Place the sleeping bag on the carrier, directly on top of the carrier handle. Place the securing straps around the bag, buckle the straps, and pull the straps tight.

12. Attach Sleeping Bag Carrier with Sleeping Bag to Suspenders.- Unfasten the snap fasteners on the two attaching straps of the carrier. Attach the two attaching straps to the suspenders by passing each one through the web keeper on top of the padded portion of the suspenders, through the metal loop located at the bottom edge of the padded portion of the suspenders, back over the top of the web keeper and then fasten the snap fastener of the attaching strap. Attach the two tie-down straps to the two front suspender straps by passing each one under the supporting straps of the ammunition cases, through the metal loop of the hook on the front suspender strap and then fasten the glove type snap fastener. After assembled load is put on, adjust the length of the two tie-down straps so that sleeping bag will be held firmly in position.

3.3 Construction.- The construction shall conform in all respects to the drawings listed in section 2.1 and as specified herein.

* 3.3.1 Stitches, seams and stitching.- All seams and stitching, except bartacking shall conform to type 301 of FED-STD-751 with 6 to 8 stitches per inch.

* 3.3.1.1 Automatic stitching.- Any of the stitching operations cited in this specification may be performed with an automatic machine provided the requirements for stitch pattern, stitches per inch, size and types of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of stitching.

* 3.3.1.2 There shall be no lubrication of the thread prior to or during sewing (see 4.3.1.1).

* 3.3.1.3 Type 301 stitching.- Thread breaks in stitching shall be overstitched not less than 1 inch back of the break. Ends of stitching shall be backstitched or backtacked not less than 1/2 inch except where ends are caught in other seams and stitching. Thread tensions shall be maintained so that there will be no loose or tight stitching and the lock will be imbedded in the materials sewed.

* 3.3.1.4 Bartacking.- Bartacking shall be 1/2 inch $\pm$ 1/16 inch long, 1/8 $\pm$ 1/32 inch wide and shall contain not less than 28 stitches. Bartacking shall be free of thread breaks and loose stitching.

* 3.3.1.5 All thread ends shall be trimmed.

3.3.2 Setting of ball type end clip.- The webbing shall be inserted the full depth of the clip. The clip shall be securely attached without cutting the webbing, and the webbing shall be flat at the point of entry.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

* 3.3.3 Setting of eyelet.- Hole punched to receive the eyelet shall be smaller than the outside diameter of eyelet barrel so that the barrel must be forced through the hole. The eyelet shall be securely clinched in a manner that will prevent detachment from or cutting of, the surrounding material. The eyelet shall be clinched without splitting.

3.4 Marking.- The identification marking shall be applied in the location shown on the drawing and shall conform to type IV, class 5 of DDD-L-20. The letters "US" shall be applied in the size characters and in the location indicated on the drawing, and shall conform to type IV, class 9 of DDD-L-20. Fastness of the class 9 marking shall be as specified for class 5 marking.

* 3.5 Workmanship.- The field pack, with assembled components as required, shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Certificate of compliance.- When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 First article inspection.- When required, the preproduction sample submitted in accordance with 3.1.2 shall be inspected as specified in 4.3.3.1 and 4.3.3.2 for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.3.1.1 The supplier shall furnish a certificate of compliance for the requirement specified in 3.3.1.2.



Source: https://assist.dla.mil.-- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

4.3.2 In-process inspection.- Inspection of subassemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with requirements indicated on drawings. Construction methods of subassemblies not in accordance with specified requirements shall be considered not acceptable.

4.3.3 Examination of the end item.- The classification of defects found during examination shall be in accordance with the lists shown in 4.3.3.1 and 4.3.3.2. The sample unit for these examinations shall be one completely fabricated field pack.

* 4.3.3.1 Visual examination.-

| Examine | Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|---|
| Cloth | Any hole, cut or tear, smash, broken or missing yarns, or open place clearly visible at normal inspection distance (3 feet). | X | | |
| | Shade bar or fine or coarse filling bar. | | X | |
| Cloth, coated, nylon | Coating defects, i.e., abrasions, blisters, cuts, holes, uncoated areas. | X | | |
| Webbing | Frayed or scalloped edge; not firmly and tightly woven. | X | | |
| Hardware | Broken or malformed, failing to serve intended purpose; finish omitted; corroded area; burr; or sharp edge. | X | | |
| | NOTE: The clipped end of each strap shall be inserted into toothed slot of companion buckle to determine whether buckle will allow passage of the end clip without having to be forced. | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|---|
| End clip | End clip not sufficiently or not properly clinched, i.e., clipped end of strap fails to pass through toothed slot of buckle. | X | | |
| | NOTE: It shall be determined whether end clip failing to pass through toothed slot of buckle results from insufficient or incorrect clinching, or malformation of the buckle. | | | |
| | Clinched excessively tight cutting webbing. | X | | |
| | Improperly clinched resulting in a configuration which is not flat but does not prevent end clip from being passed freely through the toothed slot of the buckle. | | | X |
| | Webbing not flat at point of entrance of the end clip. | | | X |
| Eyelets | Insecurely clinched or clinched excessively tight, cutting fabric. | X | | |
| | Set with washer on outside of piece "A" or flap in lieu of inside. | | | X |
| Seams and stitching: Open seam | Up to 1/2 inch. | | | X |
| | 1/2 inch or more, but not more than 1 inch. | | X | |
| | More than 1 inch. | X | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|---|
| Seams and stitching: (cont'd) | | | | |
| Open seam (cont'd) | NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open. | | | |
| Raw edge (on edge required to be finished) | More than 1/2 inch when securely caught in stitching. | | X | |
| | NOTE: Raw edge not securely caught in stitching shall be classified as an open seam. | | | |
| Run-off (see open seam) | | | | |
| Seam and stitch type | Wrong seam or stitch type. | X | | |
| Stitch tension | Loose, resulting in loose top or bobbin thread. | | | X |
| | Tight, resulting in excessive tightness of cloth on seams. | | | X |
| Stitches per inch | One stitch less than minimum specified. | | | X |
| | Two or more stitches less than minimum specified. | | X | |
| | One or more stitches in excess of maximum specified. | | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|---|
| Seams and stitching: (cont'd) | | | | |
| Stitches per inch (cont'd) | NOTE: Variation in the number of stitches per inch caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or heavy seams or turning corners shall be classified as follows: | | | |
| | (a) within the minor B defect classification - no defect | | | |
| | (b) within the minor A defect classification - minor B defect | | | |
| Stitching margins, stitching gage | Not as specified. | | X | |
| Stitching ends (not held down by other stitching) | Not backstitched or secured. | X | | |
| | Backstitched less than 1/2 inch, or not secured as specified (when automatic machines are used). | | X | |
| Thread break | Overstitched less than one inch. | | | X |
| | NOTE: Thread break not overstitched shall be classified as an open seam. | | | |
| Straight stitching | One or more required rows of stitching omitted (except on boxstitching). | X | | |
| Boxstitching | Incomplete: | | | |
| | -one row of stitching omitted. | | X | |
| | -two or more rows of stitching omitted. | X | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|---|
| Seams and stitching: (cont'd) | | | | |
| Boxstitching (cont'd) | Dimension of boxstitching (lengthwise of webbing) less than specified: | | | |
| | -by 1/4 inch or more. | | X | |
| | -by more than 1/8 inch but less than 1/4 inch on boxstitching 1-1/4 inches or less. | | | X |
| Components and assembly | Any component or required operation omitted (unless otherwise classified herein). | X | | |
| | Mend, darn or patch. | X | | |
| | Needle chew. | X | | |
| Cut parts | Not cut as specified. | X | | |
| Binding | Loosely applied or badly pleated. | | | X |
| | Ends of binding on flap or top of field pack not turned under or not finished as specified. | | X | |
| Flap: | | | | |
| Buckle chapes and buckles | Misplaced, failing to effect a smooth and secure closure of flap. | | X | |
| | Buckle on flap or body front reversed. | X | | |
| Handle | Not set to flap flat and smooth. | | | X |
| | Turnunder not caught in the entire length of boxstitching. | | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|---|
| Flap: (cont'd) Identification holder | Polyethylene film creased or punctured, edges of film not caught in outer row of stitching, opening misplaced or blocked by stitching. | | X | |
| Eyelet reinforcement | Stitched to outside of flap in lieu of inside, outer edge of reinforcement not flush with folded edge of binding or not caught in binding stitching. | | X | |
| | Set to left side of flap in lieu of right side (facing front of pack). | X | | |
| Bartack | Omitted. | X | | |
| | Not as specified or not in specified location. | | X | |
| Back: Stitching attaching flap to back | Stitching single instead of double; opening omitted, i.e., stitching continuous. | X | | |
| | Opening under or over specified length by more than 1/4 inch. | | | X |
| Piece "A" (2 required) | Throat piece caught in stitching attaching piece "A" to back. | X | | |
| | Any part of piece "A" single ply. | | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|---|
| Piece "D" | Set to back and gussets not smooth and flat. | | | X |
| | Ends of piece "B" not caught in stitching joining front of body to gussets, channels for keepers with slide omitted. | X | | |
| | Boxstitching, forming channels for keepers, beyond location specified (see piece "B", Drawing 2-3-120) by more than 1/4 inch. | | X | |
| Keeper with slide (2 required) | Not inserted through channels in piece "B" as indicated on Drawing 2-3-117, back view. | | X | |
| | Slide portion of keeper jams, failing to effect a smooth and secure closure. | | X | |
| Cleanness | Grease or oil stains clearly noticeable, thread ends not trimmed throughout. | | X | |
| Markings: "US" and identification | Omitted, incorrect, illegible or misplaced. | | X | |

4.3.3.2 Examination for dimensions.-

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Dimensions (overall) | Smaller than nominal dimensions less applicable minus tolerance indicated on drawings, but not smaller than nominal dimensions less twice the applicable minus tolerance. | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | | Classification Major | Minor |
|---|---|---|---|
| Dimensions (overall) (cont'd) | Smaller than nominal dimensions less twice the applicable minus tolerance indicated on drawings. | X | |
| | Larger than nominal dimensions and applicable plus tolerance indicated on drawings. | | X |
| Component and location dimensions | Not within specified tolerances. | | X |

4.3.3.3 Inspection level and acceptable quality level (AQL).- The inspection levels and AQLs (expressed in defects per hundred units) shall be as follows:

| Examination | Inspection level | AQL | |
|---|---|---|---|
| For defects applicable to 4.3.3.1, visual examination | II | 4.0 | Major |
| | | 10.0 | Major and minor A defects combined. |
| | | 25.0 | Total (major, minor A, and minor B defects combined). |
| For defects applicable to 4.3.3.2, examination for dimensions | S-3 | 6.5 | Major |
| | | 15.0 | Total (major and minor defects combined). |

4.3.4 Examination of preparation for delivery requirements.-

★ 4.3.4.1 Examination for packaging, packing and marking.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it shall not be palletized and need not be sealed. Shipping containers fully prepared for delivery that have not been palletized shall be examined for defects of closure. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defects |
|---|---|
| Marking (exterior and interior) | Omitted; incorrect; illegible; of improper size, location, sequence or method of application. |
| Materials | Any component missing. |
| | Any component damaged. |
| Workmanship | Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling. |
| | Bulged or distorted container. |
| Content | Number per container is more or less than specified. |
| | Number per interior package is more or less than required. 1/ |

1/ For this defect, 2 interior packages shall be examined from each container in the sample.

* 4.3.4.2 Examination for palletization.- An examination shall be made to determine that the palletization requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

| Examine | Defects |
|---|---|
| Finished dimensions | Length, width or height exceeds specified maximum requirement. |
| Palletization | Not as specified. |
| | Pallet pattern not as specified. |
| | Interlocking of loads not as specified. |
| | Load not bonded with required straps as specified. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

| Examine | Defects |
|---|---|
| Weight | Exceeds maximum load limits. |
| Marking | Omitted; incorrect; illegible; of improper size, location, sequence or method of application. |

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each field pack, with the instruction sheet (see 3.2.11) neatly folded and placed inside, shall be laid out flat with the keepers closed, waterproof throat in place, gussets tucked inside, and the flap folded over in a closed position. The securing straps shall be placed under the flap. Five packs shall then be neatly stacked one on top of another, alternated handle for handle, with flaps facing downward. The top pack shall be inverted so that the flap faces upward. The stacked packs shall be securely cross-tied with cotton tape or twine to form a compact bundle.

5.1.2 Level C.- Field packs shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

★ 5.2.1 Level A.- Sixty field packs, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Level A packages shall be packed flat, two in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25 inches in length, 19 inches in width, and 19 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636.

★ 5.2.2 Level B.- Sixty field packs, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or ST, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-F-320. Level A packages shall be packed flat two in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25 inches in length, 19 inches in width, and 19 inches in depth. Approximate



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

* 5.2.3 Level C.- Field packs, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), field packs, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

* 5.4 Marking.- In addition to any special marking required by the contract or order, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The field pack is intended to be carried on the soldier's back, secured by suspenders and belt. It is designed to carry essential items, such as food, toilet articles, etc., as a part of the combat load.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article.- Whether a preproduction sample is required (see 3.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) When palletization is not required (see 5.3).

6.3 For access to samples, address the procuring office issuing the invitation for bids.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

6.4 Marginal identification.- The outside margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and their relationship to the last previous issue.

Custodians:

Army - GL

Air Force - 82

Review activities:

Army - MD

Air Force - 82


Preparing activity:

Army - GL

Project No. 8465-0441




Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

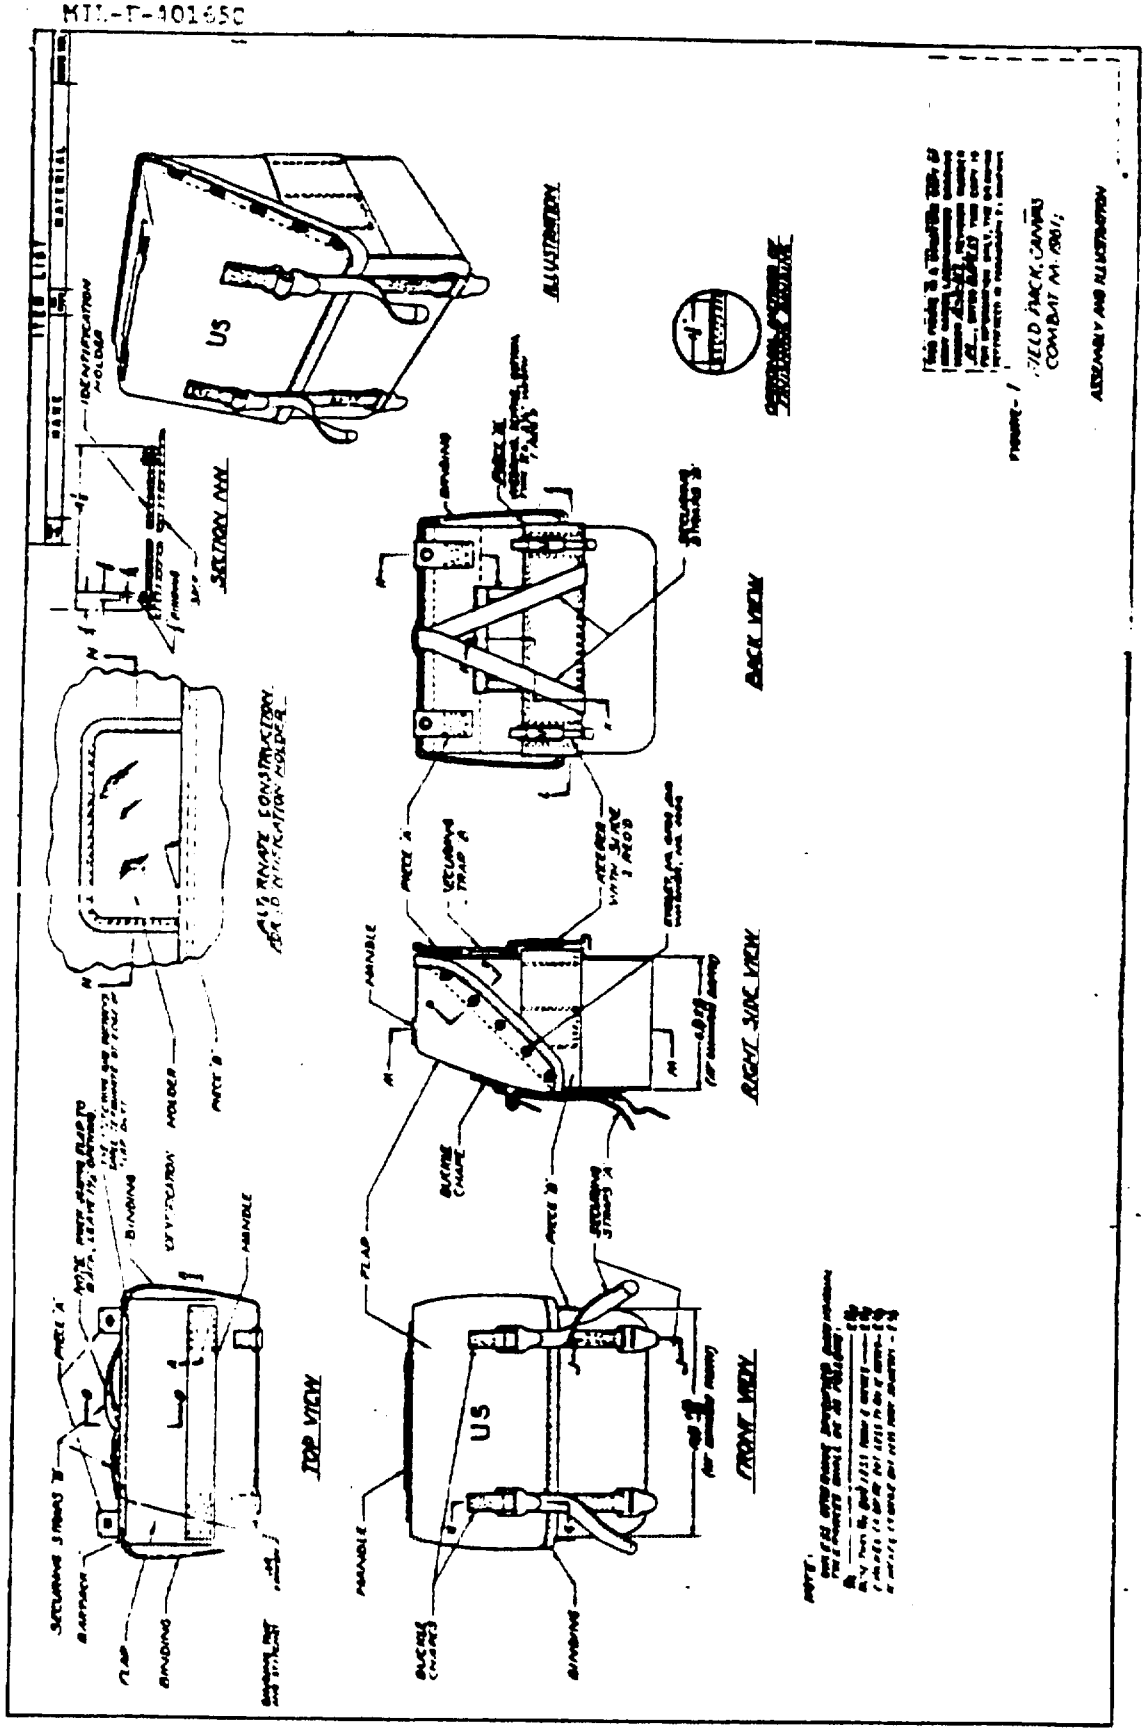





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

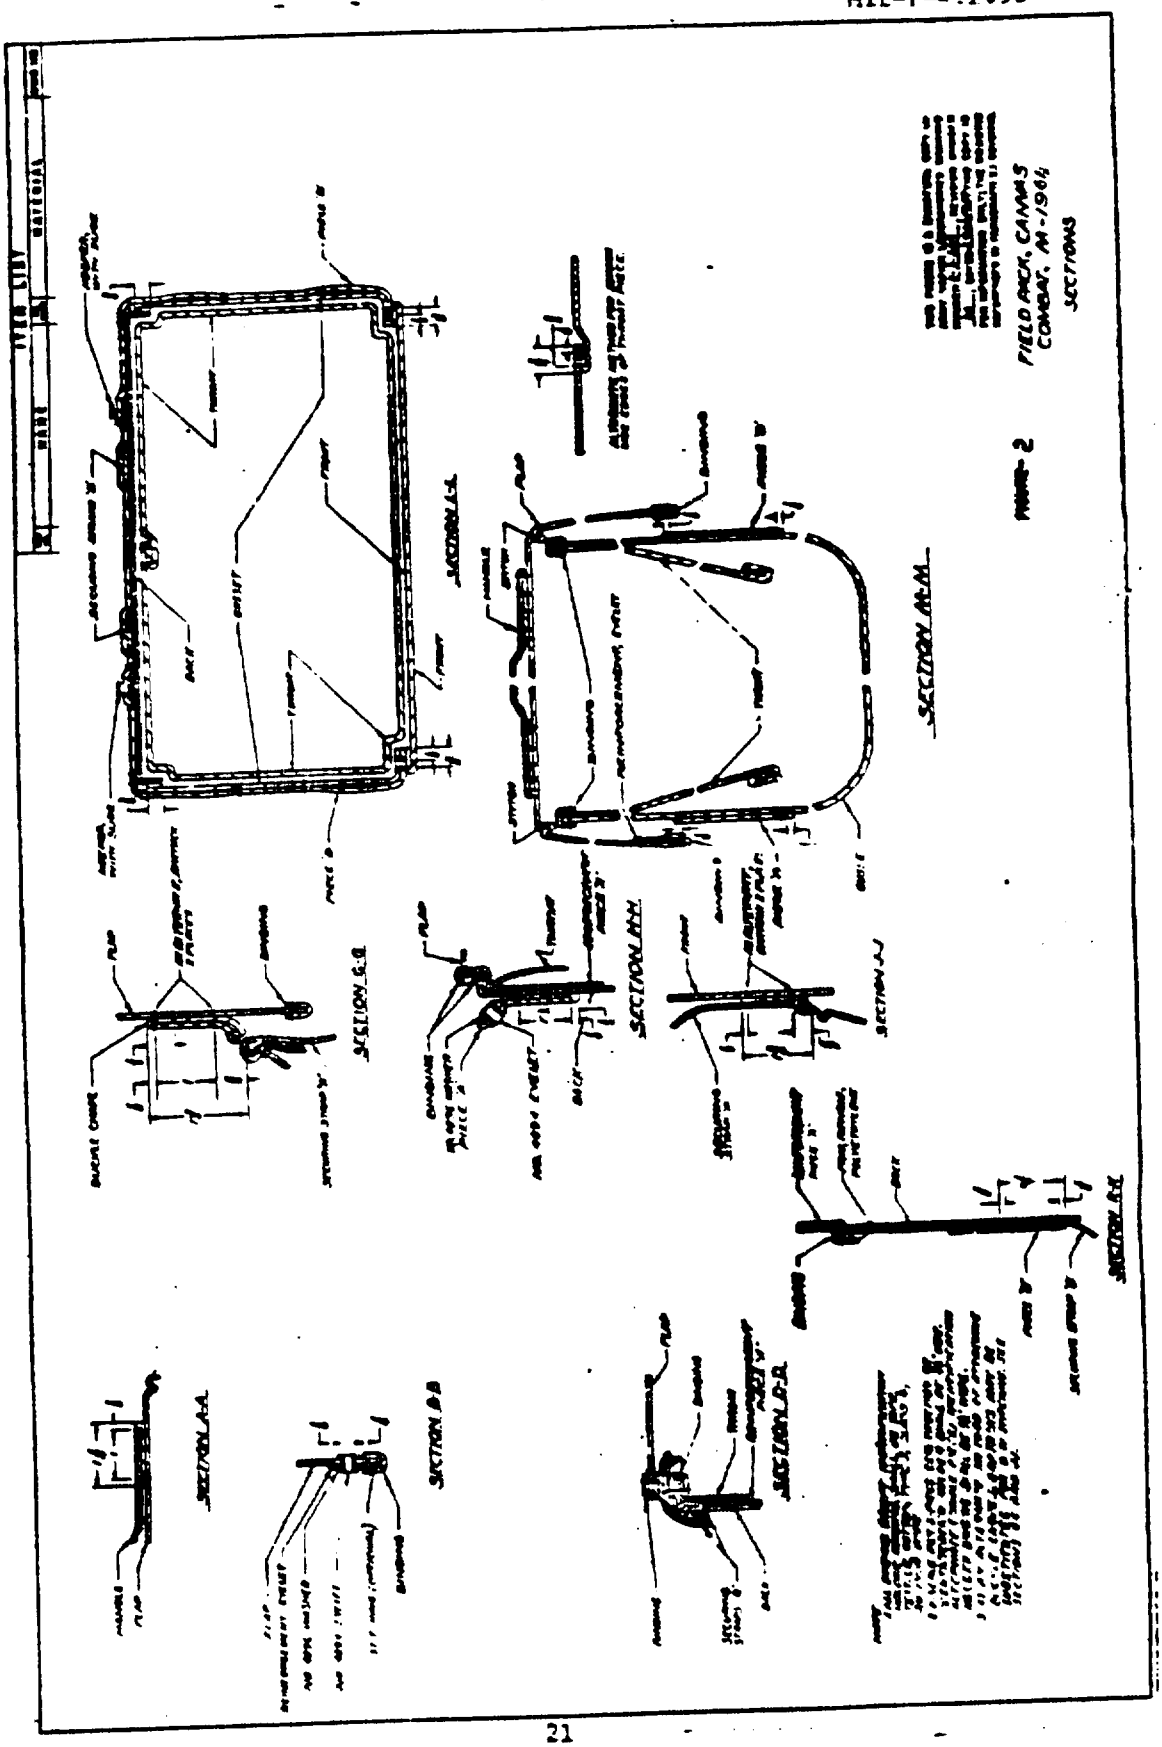




Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

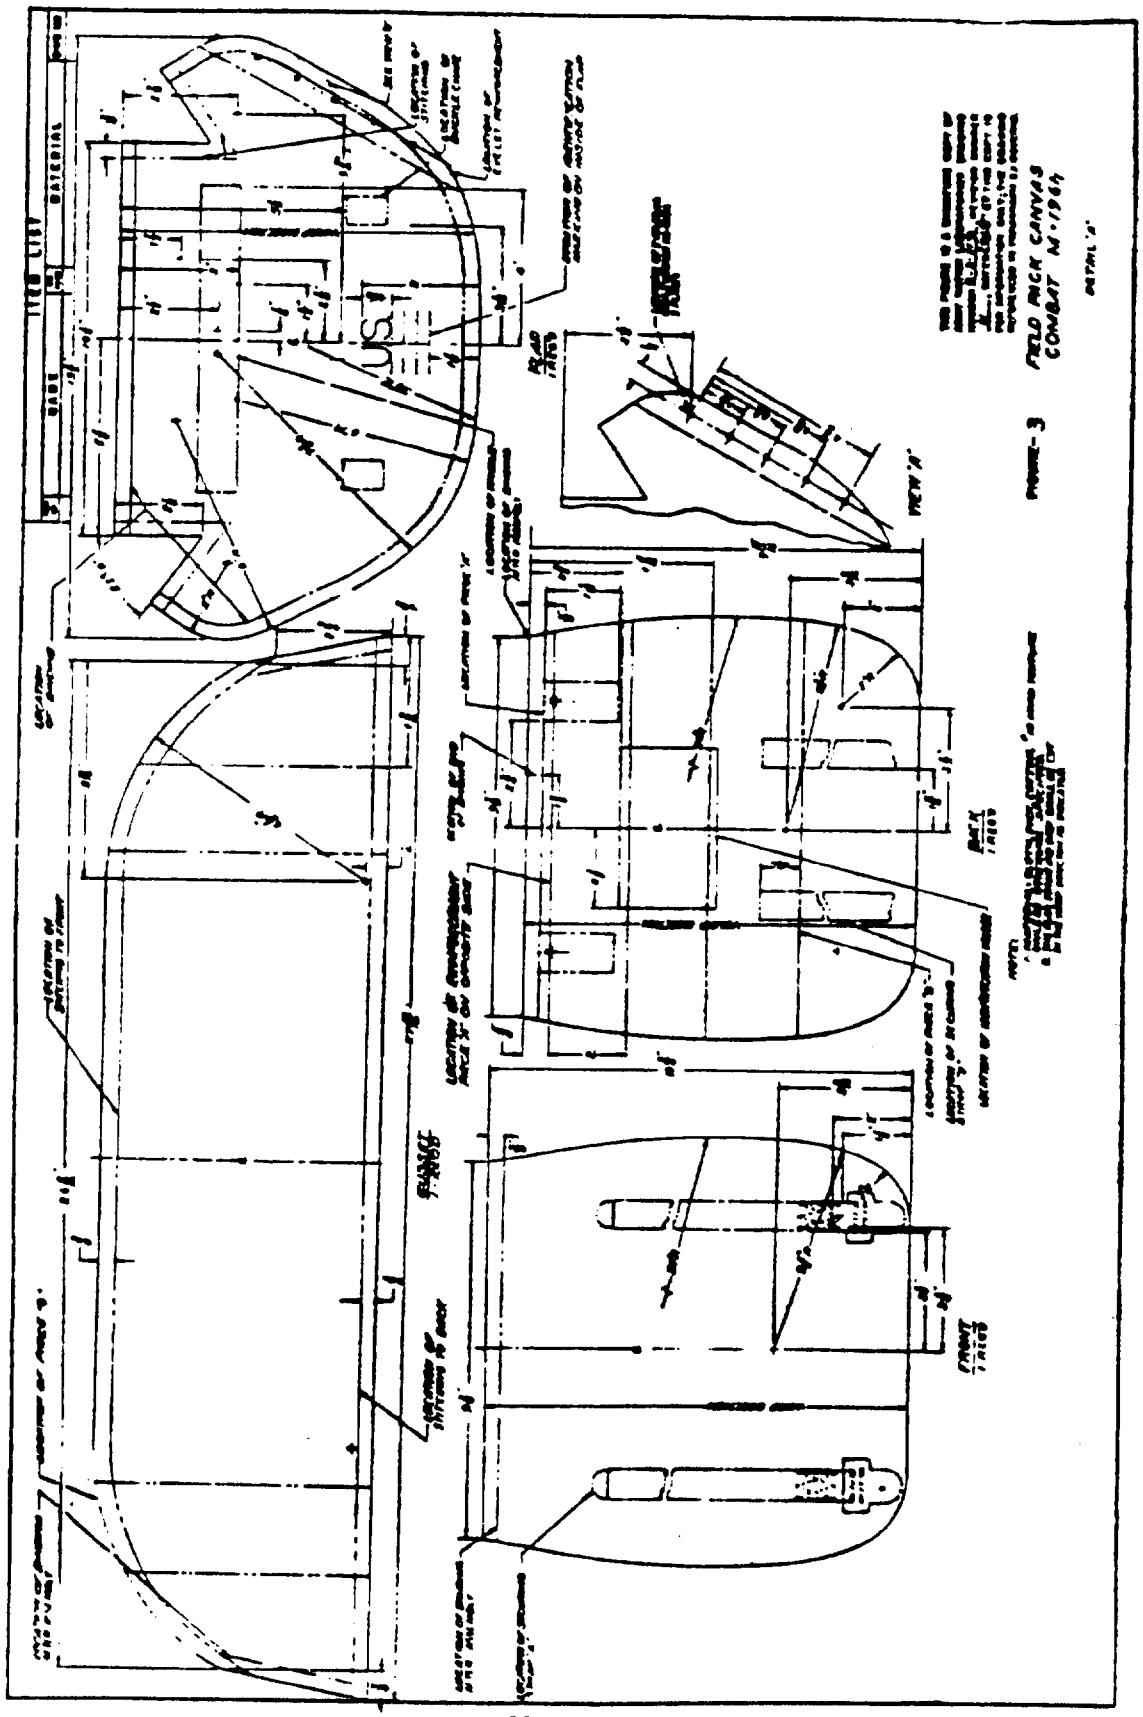



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

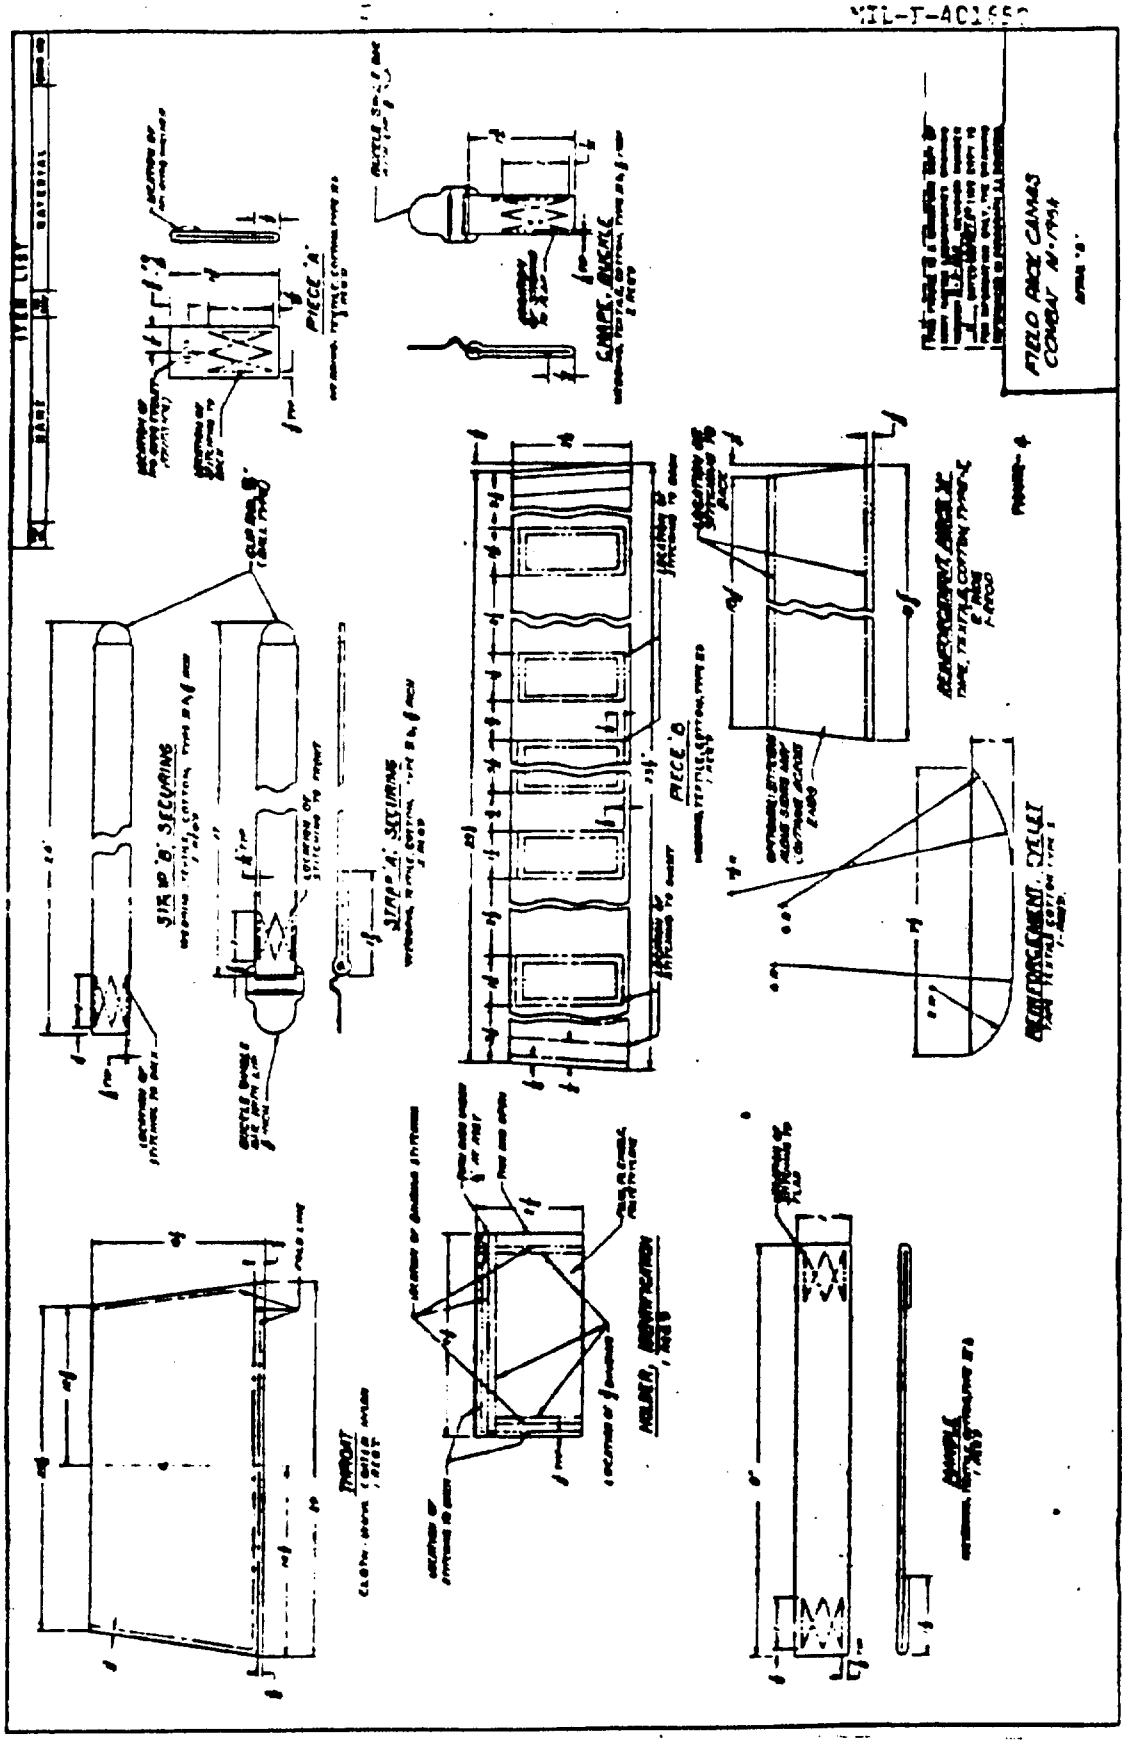



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Mass. 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:22Z
Check the source to verify that this is the current version before use.