MIL-L-40635E

5 June 1974

SUPERSEDING
MIL-L-40635D
6 August 1971
(see 6.7)

MILITARY SPECIFICATION

LAUNDRY UNITS, TRAILER MOUNTED, AND LAUNDRY UNITS SKID MOUNTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two types of 120 pound per hour capacity field laundry units (see 6.1).

1.2 Classification. The laundry units covered by this specification shall be of the following types, as specified (see 6.2):

Type I units	-	Trailer Mounted Using the M532 Single Trailer System.
Type II units	-	Skid Mounted Consisting of a Washer-Extractor and a Drying Tumbler.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

O-E-910	-	Extinguisher, Fire, Carbon Dioxide (Hand and Wheeled Types)
T-C-571	-	Cord, Cotton; General and Special Purpose, Sash and Venetian Blind

FSC 3510

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

V-T-285	-	Thread, Polyester
HH-I-553	-	Insulation Tape, Electrical (Rubber, Natural and Synthetic)
NN-P-530	-	Plywood, Flat, Panel
QQ-A-200/8	-	Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded, 6061
QQ-A-200/9	-	Aluminum Alloy Bars, Rods and Shapes, Tube and Wire, Extruded, 6063
QQ-A-250/2	-	Aluminum Alloy 3003, Plate and Sheet
QQ-A-250/4	-	Aluminum Alloy 2024, Plate and Sheet
QQ-A-250/11	-	Aluminum Alloy, 6061, Plate and Sheet
QQ-A-250/12	-	Aluminum Alloy 7075, Plate and Sheet
QQ-A-596	-	Aluminum Alloy Permanent and Semi-Permanent Mold Castings
QQ-I-652	-	Iron Castings, Gray
QQ-S-571	-	Solder, Tin Alloy, Lead Tin Alloy and Lead Alloy
QQ-S-763	-	Steel Bars, Shapes, and Forgings, Corrosion-Resisting
QQ-S-766	-	Steel Plate, Sheet, and Strip - Corrosion-Resisting
QQ-S-781	-	Strapping, Steel, Flat and Seals
TT-E-485	-	Enamel, Semigloss, Rust-Inhibiting
TT-E-529	-	Enamel, Alkyd, Semi-Gloss
TT-P-664	-	Primer, Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting
TT-P-1757	-	Primer Coating, Zinc Chromate, Low-Moisture Sensitivity
WW-T-799	-	Tube, Copper, Seamless (For Use With Solder-Type or Flared-Tube Fittings)
ZZ-H-451	-	Hose, Fire, Woven-Jacketed, Rubber or Cambric Lined, with Couplings.
ZZ-H-601	-	Hose and Hose Assemblies, Rubber (Wrapped or Braided) Water Service.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied Yarns, Army and Numbered
CCC-C-428	-	Cloth, Cotton, Duck; Fire, Water, Weather, and Mildew-Resistant
MMM-A-260	-	Adhesive, Water-Resistant, (For Sealing Waterproofed Paper)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-1055	-	Barrier Material, Waterproofed, Flexible
PPP-C-650	-	Crate, Wood, Open and Covered
PPP-T-75	-	Tape, Preservation and Sealing

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-104	-	Crate, Wood, Lumber and Plywood Sheathed, Nailed and Bolted
MIL-P-116	-	Preservation, Methods of
MIL-B-121	-	Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-T-152	-	Treatment, Moisture and Fungus Resistant of Communications, Electronic and Associated Electrical Equipment
MIL-C-496	-	Clip, End, Strap
MIL-P-514	-	Plate, Identification, Instruction and Marking Blank
MIL-W-530	-	Webbing, Textile, Cotton, General Purpose, Natural or in Colors
MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-R-1670	-	Rope, Tent-Lay
MIL-V-13811	-	Varnish, Waterproofing, Electrical Ignition
MIL-P-15328	-	Primer (Wash) Pretreatment, Blue, (Formula 117B for Metals)
MIL-G-16491	-	Grommet, Metallic
MIL-G-18709	-	Grease, Ball and Roller Bearing (Navy)
MIL-L-40069	-	Leather, Cattlehide, Chrome Tanned, Cold Climate
MIL-T-40624	-	Tarpaulin, Laundry, Trailer Mounted, Single Trailer Type, M532
MIL-P-46093	-	Primer Coating, Synthetic (For Brake Drums)
MIL-G-52732	-	Generator Set, Gasoline Engine Driven, 0.5 thru 10 Kw, 60 Hertz, 400 Hertz and 28 Volt D.C., Type I (Tactical), Class 2 (Utility)
MIL-G-52732/11	-	Generator Set, Gasoline Engine Driven, 10 Kw, 60 Hertz, Type I, Class 2

STANDARDS

FEDERAL

FED-STD-66	-	Steel: Chemical Composition and Hardenability
FED-STD-595	-	Colors
FED-STD-751	-	Stitches, Seams, and Stitching

MILITARY

MIL-STD-12	-	Abbreviations for Use on Drawings and in Technical-Type Publications

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-130	-	Identification Marking of U. S. Military Property
MIL-STD-195	-	Marking of Connections for Electrical Assemblies
MIL-STD-281	-	Automobile, Trucks, Truck Tractors, Trailers, and Trailer Dollies, Preservation and Packing of
MIL-STD-461	-	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	-	Electromagnetic Interference Characteristics, Measurement Of
MIL-STD-642	-	Identification Marking of Combat and Tactical Transport Vehicles
MS 9048	-	Pin, Spring, Steel, Cadmium Plated
MS 15003	-	Fitting, Lubrication, Hydraulic, Surface Check, 1/8 Pipe Thread, Steel
MS 15795	-	Washer, Flat, Metal, Round, General Purpose (In/Mm)
MS 16995	-	Screw, Cap, Socket, Head-Hexagon, CRS, UNC-3A
MS 16997	-	Screw, Cap, Socket, Head-Hexagon, Alloy Steel, Cadmium Plated, UNC-3A
MS 20613	-	Rivet, Solid, Universal Head, Steel, Carbon and CRS
MS 20913	-	Plug, Square Head Pipe Thread
MS 21044	-	Nut, Self-Locking, Hexagon, 250°F, 125 Ksi Ft and 60 Ksi Ft
MS 21083	-	Nut, Self-Locking, Hexagon, Non-metallic Insert, Low Height, 250°F
MS 24621	-	Screw, Tapping, Thread Forming, Type B Pan Head, Cross Recess
MS 24665	-	Pin, Cotter
MS 24692	-	Pin, Tapered, Plain
MS 27022	-	Coupling, Half, Quick Disconnect, Cam Locking Type, Male, Ext. Pipe Thd
MS 27026	-	Coupling, Half, Quick Disconnect, Cam Locking Type, Female, Ext. Pipe Thd
MS 27183	-	Washer, Flat, Round, Steel, Cadmium Plate, General Purpose
MS 35190	-	Screw, Machine, 82 Degree Flat Countersunk, Head, Cross Recess, Cadmium Plate, UNC-2
MS 35206	-	Screw, Machine, Pan Head, Cross Recess, Cadmium Plated, UNC-2A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

MS 35207	-	Screw, Machine, Pan Head, Cross Recess, Cadmium Plated, UNF-2A
MS 35215	-	Screw, Machine, Pan Head, Cross Recess, Brass, Black Oxide, UNF-2A
MS 35223	-	Screw, Machine, Pan Head, Slotted, Steel, Cadmium Plated, NC-2A and UNC-2A
MS 35307	-	Screw, Cap, Hexagon, CRES, Passivated, UNC-2A
MS 35333	-	Washer, Lock, Flat, Internal Tooth (In/Mm)
MS 35335	-	Washer, Lock, Flat, External Tooth (In/Mm)
MS 35338	-	Washer, Lock-Spring, Helical, Regular (Medium) Series
MS 35649	-	Nut, Plain, Hexagon, Machine Screw, UNC-2B
MS 35650	-	Nut, Plain, Hexagon, Machine Screw, UNF-2B
MS 35691	-	Nut, Plain, Hexagon, (Jam), UNC-2B and UNF-2B
MS 35692	-	Nut, Slotted, Hexagon, UNC-2B and UNF-2B
MS 35810	-	Pin, Straight, Headed (Clevis Pin), Steel, Cadmium or Zinc Plated
MS 35822	-	Hinge, Continuous (Piano) .040 Thick, .091 Pin Dia.
MS 35842	-	Clamp, Hose, Low Pressure, Type f
MS 51848	-	Washer, Lock-Helical Spring, Hi-Collar
MS 51922	-	Nut, Self-Locking, Hexagon Prevailing Torque, General Purpose, 250°F, UNC-2B and UNF-2B
MS 51927	-	Buckle, Tongueless, 1-Bar
MS 51936	-	Washer, Flat (Burr)
MS 51943	-	Nut, Self-Locking, Hexagon Prevailing Torque, For Critical Installation, 250°F, UNC-3B and UNF-3B
MS 51955	-	Setscrew, Square Head, Cup Point, Carbon Steel, Cadmium Plate, UNC-2A
MS 51957	-	Screw, Machine, Pan Head, Cross-Recessed, CRES, Pass. UNC-2A
MS 51963	-	Setscrew, Hexagon Socket, Cup Point, Alloy Steel, Cadmium Plate, UNC-3A, Plain and Self-Locking
MS 51967	-	Nut, Plain, Hexagon, Carbon Steel, Cadmium Plate, UNF-2B
MS 51971	-	Nut, Plain, Hexagon, CRES, 300 Series, Passivated, UNC-2B
MS 51973	-	Setscrew, Hexagon Socket, Cone Point, Alloy Steel, Cadmium Plate, UNC-3A
MS 51976	-	Setscrew, Hexagon Socket, Half-Dog Point, Alloy Steel, Cadmium Plate, UNF-3A
MS 90725	-	Screw, Cap, Hexagon Head (Finished Hex Bolt) Steel, Grade 5, Cadmium Plate, UNC-2A
MS 90726	-	Screw, Cap, Hexagon Head (Finished Hex Bolt) Steel, Grade 5, Cadmium Plate, UNF-2A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY NATICK LABORATORIES

Type I

6-2-1690 - Laundry, Trailer Mounted, Single Trailer Type, M532, Drawing List

Type II

6-1-2990 - Laundry, Skid-Mounted, Cold Water, (BARE BASE), Drawing List

(Miniature copies of Drawings 6-2-1690 and 6-1-2990 identified as figures 1 and 2, respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Electrical Manufacturer's Association (NEMA)

Publication No. MG1 - Motors and Generators.

(Application for copies should be addressed to the National Electrical Manufacturer's Association, 155 East 44th Street, New York, NY 10017.)

American Welding Society Code

Standard Qualification Procedure of the American Welding Society.

(Application for copies should be addressed to the American Welding Society, 345 East 47th Street, New York, NY 10017.)

American Society of Mechanical Engineers Code (ASME)

Welding Qualifications of the American Society of Mechanical Engineers. Boiler and Pressure Vessel Code, Section IV - Low Pressure Heating Boilers.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the currentversion before use.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

American Society for Testing and Materials (ASTM)

A386-71 - Zinc Coating (Hot Dip) on Assembled Steel Products.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

National Fire Protection Association (NFPA)

Standard No. 70 - National Electrical Code.

(Application for copies should be addressed to the National Fire Protection Association, 60 Batterymarch Street, Boston, MA 02110.)

Department of Transportation Publication

Motor Carrier Safety Regulations

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

Association of American Railroads Publication

Pamphlet No. MD-7 - Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago, IL 60605.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

Hydraulic Institute Standards

(Application for copies of applicable standards should be addressed to the Hydraulic Institute, 122 East 42nd Street, New York, NY 10017.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.5).

3.2 Standard product. The laundry unit delivered under this specification shall be the manufacturer's commercial product, except for any changes necessary to comply with specification requirements. All like items furnished on any one contract, including parts and subassemblies thereof shall be new and interchangeable.

3.3 Codes and standards The laundry unit shall comply with the applicable requirements of NFPA-70, and ASTM A386 and MG-1.

3.3.1 Compliance. Prior to approval of the first article, if one is submitted, or prior to commencing production, the supplier shall submit to the contracting officer or his authorized representative satisfactory evidence that the laundry unit that he proposes to furnish under this specification meet the applicable requirements of NFPA-70, ASTM A386 and MG-1.

3.3.1.1 NFPA. Acceptable evidence of meeting the requirements of NFPA shall be a certificate of compliance certifying that the wiring of the laundry units conforms to NFPA-70.

3.3.1.2 ASTM. Acceptable evidence of meeting Hot Dip requirements of ASTM A386 shall be a certificate of compliance certifying that Hot Dip galvanizing of the drain tanks for the laundry units conforms to ASTM A386.

3.3.1.3 NEMA. Acceptable evidence of meeting the requirements of NEMA shall be a certificate of compliance certifying that the motors and generators conform to MG-1.

3.4 Materials. The materials used shall conform to the applicable referenced specifications, standards, and requirements specified hereinafter. Materials not definitely specified shall be of the quality normally used by the manufacturer provided the completed items comply with all provisions of

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

this specification. All materials shall be new and unused. Abbreviations describing materials on drawings shall be interpreted in accordance with MIL-STD-12.

3.4.1 Alternative components. Components offered as equivalent to components specified hereinafter and on the referenced drawings as specific manufacturer's part number or equal shall be functionally equal, or of equal or better quality, to the manufacturer's identified part number. The incorporation and inclusion of such a component in the design of the specified end product shall not require modification or change to any other specified component, and shall not reduce ease of maintenance to it or any other components, unless such modification or change is specfically approved by the contracting officer. Prior to manufacture of the first article, or if none is required, prior to commencing production, the contractor shall submit for the contracting officer's approval a list identifying each proposed alternative component, together with proof that each listed component complies with the requirements herein. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of first article or production manufacture, as applicable, and does not relieve the contractor of the responsibility that the component perform in accordance with specified requirements when incorporated in the end product.

3.4.1.1 Aluminum alloy. Aluminum alloy bars, rods, shapes, plate, sheet, strip, and castings of the alloy number and temper designation specified on drawings shall conform to the following specifications as applicable: QQ-A-200/8, QQ-A-200/9, QQ-A-250/2, QQ-A-250/4, QQ-A-250/11, QQ-A-250/12, alloy number 319 of QQ-A-596 and class 11 of QQ-A-596.

3.4.2 Steel.

3.4.2.1 Carbon steel. Carbon steel alloys specified on drawings shall conform to the applicable chemical composition of FED-STD-66.

3.4.2.1.1 Fastening devices. Unless otherwise specified on drawings, all carbon steel fastening devices shall be cadmium plated.

3.4.2.2 Corrosion-resisting steel. Corrosion-resisting steel in the class specified on drawings and of the conditions, temper, and finish suitable for the purpose intended shall conform to QQ-S-766 or QQ-S-763, as applicable.

3.4.3 Cast iron. Iron castings shall have mechanical properties equal to or better than class 35 of QQ-I-652.

3.4.4 Tube, copper. Copper tube shall be seamless, in the sizes specified on drawings, and conform to type L, class 2 of WW-T-799.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

3.4.5 Buckles, tongueless, 1-bar, 1-inch. One-inch 1-bar buckles shall be brass conforming to type I, style 2, class 1 of MIL-B-543.

3.4.6 Clips, end, ball type, 1-inch. One-inch ball type end clips shall be brass conforming to type I, class 1 of MIL-C-496.

3.4.7 Extinguisher, fire, 5 lb. capacity (with bracket). The fire extinguisher shall have a quick release type bracket of the vehicle-type, having a base for floor mounting the extinguisher in an upright position and conform to the requirements for type 1, size 5 of O-E-910 (see 3.6.5).

3.4.8 Hose.

3.4.8.1 Hose, fire. Fire hose identified on Drawing 6-1-746 or 6-1-1023 (as applicable), shall be polyester-fiber jacket, hose conforming to type II, class B, size 1-1/2 of ZZ-H-451.

3.4.8.2 Hose, suction, and drain. The suction hose identified on Drawing 6-1-746 or 6-1-1023 (as applicable), and the drain hose identified on Drawing 6-2-2207 (for type I), 6-1-1010 (for type II), shall be non-collapsible, manufactured from synthetic-rubber (hose only), conforming to type II of ZZ-H-451.

3.4.8.3 Hose, rubber, 1-inch, I.D. The 1-inch rubber hose used on the water heater and for water supply lines to the washer-extractor shall conform to grade I, class 1 of ZZ-H-601.

3.4.9 Covers, cloth ducts and cover components. Covers for the type I laundry units shall be Government furnished unless otherwise specified (see 3.4.17 and 6.2). Covers and cover components for the type II laundry units, shall be as follows:

3.4.9.1 Cloth. The cloth for the canvas covers shall conform to type I, number 6, hard texture of CCC-C-419. The finished cloth shall be dyed olive drab No. 7 and shall conform to type I, class 1 of CCC-C-428.

3.4.9.2 Exhaust duct cloth. The cloth used for the 12 inch exhaust duct shall be 9.85 ounces per square yard conforming to type III of CCC-C-419. Color and treatment of the finished cloth shall conform to type I, class 1 of CCC-C-428.

3.4.9.3 Webbing, cotton. The webbing shall be olive drab, shade No. 7 and shall conform to type IIa, class 4, 1 inch width or type III, class 4, 1 inch width of MIL-W-530.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the currentversion before use.

3.4.9.4 Tie ropes. The line used for the tie ropes shall conform to type I, class 2, 3/8 inch diameter of MIL-R-1670.

3.4.9.5 Grommets, metallic. The grommets shall conform to type III, class 3, size 4 of MIL-G-16491.

3.4.9.6 Cord, cotton, braided. The cord shall conform to type I, class 3, of size 8 of T-C-571.

3.4.9.7 Leather. The leather used on the type II canvas covers shall conform to MIL-L-40069.

3.4.9.8 Covers, canvas. The canvas covers for the type II washer extractor and drying tumbler shall be as shown on Drawing Nos. 2-2-272,2-2-273, 2-2-274 and 2-2-275.

3.4.10 Thread, polyester. The thread shall conform to type I, class 1, sub-class B, dyed shade S-1 (Cable No. 66022) of V-T-285. The dyed thread shall show fastness to weathering equal to or better than the standard shade sample (see 6.3). If no standard shade sample is available, the thread shall show good fastness to weathering. Thread sizes shall be as follows:

For type 301 stitching	-	Size FF for needle and bobbin
For type 401 stitching	-	Size FF for needle
	-	Size F for looper

3.4.11 Primer, coating. The primer coating shall conform to composition G of TT-P-1757.

3.4.12 Enamel, synthetic, semigloss. The enamel shall be semigloss conforming to the requirements of TT-E-529. The color shall be olive drab corresponding to No. 24087 of FED-STD-595.

3.4.12.1 Enamel, semigloss, rust-inhibiting. For Marine corps procurement (see 6.2), the enamel shall be semigloss, rust-inhibiting conforming to TT-E-485. The color shall match Marine Corps Green No. 23 (see 6.3.1).

3.4.13 Adhesive for bonding felt to steel. The adhesive used for bonding felt to steel inside the cylinder storage box shall be a neoprene base solvent cement (see 3.6.11).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

3.4.14 Timers, electric. The electric timers identified on Drawing 6-2-1919 and on Drawing 6-2-2337 for the type I units and Drawings 6-1-1008 and 6-2-2337 for the type II units shall be equipped with a dial, calibrated with graduations of one minute or less for 13 to zero minutes with an "off" position. The timer on the dryer shall be connected to an alarm so that when the indicator is set at any position from 13 to zero it will run automatically until the indicator reaches zero, and when the indicator reaches zero it shall cause the alarm to signal and remain in that position until it has been turned to the "off" position. The dial retaining rims of the timers shall be constructed of either corrosion-resisting metal or cadmium plated steel. The timers shall be constructed so that they will not be energized when in the "off" position (see 4.4.2.2.9 and 4.4.2.2.10).

3.4.15 Controller, temperature. The temperature controller identified on Drawing No. 6-2-1907 shall be Model No. 21103 Thermoswitch manufactured by Fenwal Incorporated or equal with the following modifications:

(a) Non-calibrated dial (with graduations from 1 to 7) and knob.
(b) Temperature at number 4 set at 150 degrees Fahrenheit.
(c) Moisture-resistant electrical connector for 1/2 inch conduit.

3.4.16 Motors, electric.

3.4.16.1 Washer motors. The washer motors identified on Drawing No. 6-2-2981 shall be a 40° C. temperature rise squirrel cage induction motor rated at 1-horsepower, 850 rpm for operation on 208-230 volt, 60 hertz, 3-phase electric system and conform to the requirements of National Electrical Manufacturer's Association Publication No. MG-1, as applicable, with the following additional requirements: The motor shall conform to the characteristic curves and other requirements specified on Drawing 6-2-2209 when tested as specified in 4.4.2.2.1. The motor shall be drip proof with encapsulated windings and with frame size P-213H. The stator shall be constructed with 8 poles, 36 coils and 36 slots, divided into three groups, connected either wye or delta. Bearings shall be ball bearings of the permanently lubricated type or shall have adequate and accessible means for lubrication (see 6.4).

3.4.16.2 Extractor motors. The extractor motors identified on Drawing 6-2-2981 shall be a 50° C. temperature rise squirrel cage induction motor rated at 5-1/2-horsepower, 1650 rpm for operation on 208-230 volt, 60 hertz, 3-phase electric service and conform to the requirements of National Electrical Manufacturer's Association Publication No. MG-1, as applicable, with the following

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

additional requirements: The motor shall conform to the characteristic curves and other requirements specified on Drawing 6-2-2208 when tested as specified in 4.4.2.2.1. The stator shall be constructed with 4 poles, 36 coils and 36 slots, divided into three groups connected either wye or delta. The motor shall be drip proof with encapsulated windings and with frame size P-213H. The motor shall have a time thermal overload protection incorporated in the windings with separate leads terminating in the motor connection box and identified as K-1 and K-2. Bearings shall be ball bearings of the permanently lubricated type or shall have adequate and accessible means for lubrication (see 6.4).

3.4.17 Government furnished property. Unless otherwise specified (see 6.2), the below listed items for type I units will be Government furnished property:

(a) Chassis assembly. The chassis assembly will be an M536 trailer with supporting leg, welded deck plates, and undrilled platform.

(b) Engine-generator. The engine-generator will be a Model MEP-018A, 10 Kw air-cooled gasoline engine driven alternating current generator in accordance with MIL-G-52732 (see 3.4.18 and 3.6.2).

(c) Cover, canvas. The canvas cover for the single trailer laundry will conform to MIL-C-40624.

(d) Exhaust duct cloth (see 3.4.9.2).

(e) Webbing, textile, cotton (see 3.4.9.3).

(f) Ground rod. The ground rod will be as shown on Drawing No. 6-2-1912.

3.4.18 Engine-generator set for type I units only. The engine-generator set specified in 3.4.17 shall be modified by the supplier in accordance with Drawing 6-2-1912.

3.4.19 Washer-extractor assembly. The washer-extractor assembly, when operating through a complete washer and extractor cycle with garments, shall not fail, and there shall be no evidence of the following when tested as specified in 4.4.2.2.9:

(a) Improper interrelationship of components.
(b) Improper operation of control devices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

(c) Overheated bearings.
(d) Leaks during the washing and extraction cycles.
(e) Structural failures.

3.4.20 Tumbler and air heater assembly. The tumbler and air heater assembly when operated with gasoline through complete tumbler and air heater cycles without garments shall not fail and there shall be no evidence of the following when the equipment is tested as specified in 4.4.2.2.10:

(a) Improper interrelationship of components.
(b) Improper sequence and operation of safety or operational control devices.
(c) Overheated bearings.
(d) Structural failures.
(e) With the thermostat set at 250° F, the assembly shall function so that the drying air temperature is maintained within plus or minus 5 degrees of the thermostat setting.

3.5 Performance.

3.5.1 Endurance. The completely assembled laundry equipment shall launder wool garments when tested as specified in 4.5.1. There shall be no damage to any components throughout the test and all electrical and mechanical components shall function properly.

3.5.2 Wash and dry of cotton garments. Using cotton garments as laundry, the equipment shall wash and dry the laundry, to within 5 percent of its dry weight, when tested as specified in 4.5.2. Cotton garments shall be defined as "dry" when normal dry weight is increased by no more than 7 percent.

3.5.3 Operational. The laundry equipment furnished under this specification shall operate satisfactorily without evidence of overheating of bearings and malfunctioning of the air compressor system, water pump; and the heater for type I unit, washer extractor and control panel, and drying tumbler when tested as specified in 4.5.3. The full operating air pressure shall be from 75 to 90 pounds per square inch gage (psig). The burner ignition spark shall be 3/16 inch wide $\pm$ 1/32 inch; the compressed length of the compression spring shall be not less than 4 inches with belts loose; and the wash cylinder brake shall stop the cylinder from full extraction in approximately 30 seconds after extract phase.

3.5.4 Road and terrain. The type I unit shall satisfactorily traverse the test course, shall show no damage to the components, and shall show that the components remain securely fastened with no evidence of looseness when subjecte to the road and terrain tests specified in 4.5.4 and 4.5.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

3.6 Construction. The construction of all components and assemblies of the type I and type II laundry units shall conform to the requirements herein and on drawings listed on drawling list in 2.1, except the plywood baseboard shown on Drawing 6-1-746 (type I) will not be required. Adaptation, modification, and assembly of Government furnished property as specified on referenced drawings shall be the responsibility of the supplier. The units shall be complete in every respect with all piping and operating parts securely mounted to withstand the operational requirements for type I and II and road and terrain requirements (as required), for type I specified in 3.5.3 and 3.5.4.

* 3.6.1 Welders. The welders performaing the welding on the washer-extractor shall be certified welders and have passed the qualification test as prescribed by either the "Standard Qualification Procedures of the American Welding Society" or "Welding Qualification of the American Society of Mechanical Engineers" code. The supplier shall furnish the Government with a list of names of his welders who are certified and have passed the test of either referenced codes and he shall certify that the welding of this equipment was performed by welders on the list.

3.6.2 Wiring. Wiring specified herein and all wiring not delineated on the applicable detail drawings shall be done in accordance with NFPA Standard No. 70, National Electrical Code. All wires or wiring shall be identified in accordance with the applicable wiring diagrams and marked in accordance with MIL-STD-195. Unless otherwise specified on the detail drawings, all wiring connections shall be soldered, taped with rubber tape, or have staked connections. The solder shall conform to type R of QQ-S-571 and the tape shall conform to HH-I-553. The polarity of the wiring connections in the installation of the equipment shall be such that the electric motors operate in the proper direction when tested as specified in 4.4.2.2.2 and 4.4.2.2.3.

3.6.3 Pump, water. The water pump shall be centrifugal, single stage, self-priming and shall have a capacity of 18 to 20 gallons per minute (gpm) with 65 to 70 feet total head, required net positive suction head of not more than 4 feet when operating at 3450 rpm when tested as specified in 4.4.2.2.4. When tested as specified in 4.4.2.2.4, the pump shall have characteristic curves including total head, net positive suction head, horsepower and efficiency equivalent to the curves as shown on Drawing 6-1-743. The suction connection of the pump shall be on the end of the case. The case shall be cast aluminum. The weight of the pump excluding the motor shall not exceed 32 pounds. The pump for type I units shall be driven by an electric motor, General Electric Model No. 5K43 GG3266 Frame No. 56J or equal. The pump for type II units shall be driven by an electric motor, General Electric Model No. 5K43 HG1230 Frame No. 56J or equal. The motors for the type I and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

type II units shall be end mounted, drip proof with encapsulated windings fan cooled, 3/4 hp, 3450 rpm, 208 volts, 60 hertz, 3-phase.

3.6.4 Heater, water for type I units.

3.6.4.1 Fire box and outside water vessels. The fire box and outside water vessel shall be fabricated as shown on applicable drawings. After fabrication and prior to painting, each fire box assembly and outside vessel assembly shall show no leaks when individually tested as specified in 4.4.2.2.5 with a hydrostatic pressure of 75 psig.

* 3.6.4.2 Water heater assembly. The hot water heater shall be fabricated and assembled as shown on the applicable and subassembly drawings. The water heater shall be capable of maintaining a 70 degrees Fahrenheit (F) water temperature differential between the inlet and outlet water connections of the heater assembly, when water is supplied to the heater at a minimum rate of 16 gallons per minute at the boiler inlet. A water pressure relief valve shall be provided and shall comply with the American Society of Mechanical Engineers Code (ASME) low pressure heating boilers, section IV. The fuel pump shall be capable of supplying fuel at 100 psig pressure with bypass valve closed and the burner shall operate satisfactorily at a fuel pressure of 100 psig without visual evidence of smoke (see 4.4.2.2.6). At the completion of fire test procedure the fuel pressure shall be reduced to 80 psig pressure (see 4.5.3.2 (g)).

3.6.5 Brackets, fire extinguisher. The bracket specified in 3.4.7 shall be mounted in the location shown on Drawing 6-2-2007 for the type I units, and as shown on Drawing 6-1-1000 for the type II units.

3.6.6 Hoses, fire, drain, and suction. The fire, drain, and suction hoses specified in 3.4.8.1 and 3.4.8.2 shall be connected to the couplings as shown on applicable drawings and shall not leak when tested as specified in 4.4.2.2.7 with an internal air pressure of 15 psig for a period of five minutes.

3.6.7 Stitches, seams and stitching. All stitching for the 12-inch exhaust duct specified in 3.6.9 shall conform to type 301 or 401 of FED-STD-751 with 5 to 7 stitches per inch. Thread tension shall be maintained so that there will be no loose stitching. All thread ends shall be trimmed.

3.6.7.1 The addition of any lubricant to the polyester sewing thread prior to or during the sewing operation is prohibited.

3.6.7.2 Thread breaks. Thread breaks in stitching shall be overstitched not less than one inch at each break on type 301 stitching and not less than 1-1/2-inches at each break on type 401 stitching.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

3.6.7.3 Stitching ends. Stitching at the ends on type 301 stitching shall be backstitched or backtacked not less than one inch except where ends are turned under in a hem or held down by other stitching.

3.6.8 Setting of end clips. The webbing shall be inserted the full depth of the clips. The webbing shall lie flat at the point of entrance and the clips shall be securely attached without cutting the webbing.

3.6.9 Duct, exhaust, 12-inch. The 12-inch flexible duct, detailed on Drawings 5-13-2090 thru 5-13-2094, for the type I and type II units shall be furnished by the supplier and shall be attached to the exhaust outlet without the use of tools and shall fit without perceptible leakage.

3.6.10 Lubrication. The washer-extractor main cylinder bearing shall be lubricated with two-pounds of general purpose grease conforming to MIL-G-18709. All bearings, shafts and other moving parts requiring lubrication shall be properly lubricated. Except as otherwise specified above, the lubricant used shall be of the type and grade recommended by the part manufacturer for all moving parts not requiring grease.

3.6.11 Application of felt to metal. Lining of the interior surfaces of the cylinder storage cabinet with felt shall be done with adhesive specified in 3.4.13 and shall withstand the bonding test specified in 4.4.2.2.8 without separation of the glue line itself.

3.6.12 Moisture and fungus-resistant treatment. Unless otherwise specified (see 6.2), electrical components of equipment covered by this specification shall be moisture and fungus-resistant treated with materials conforming to and applied as required by MIL-T-152.

3.6.13 Electromagnetic compatibility. When specified (see 6.2), laundry units procured under this specification shall conform to class IIB of MIL-STD-461 (see 4.5.6).

3.6.14 Finish.

3.6.14.1 Drain tanks. After fabrication and prior to installation, the water drain tanks under the type I and type II washer-extractors shall be galvanized by the hot-dip method of ASTM A386 for class B material.

3.6.14.2 Surface preparation. All exposed or exposable metal surfaces, plated or not, with exception of surfaces that would be adversely affected by paint shall be thoroughly cleaned and conditioned for painting by coating with a wash primer conforming to MIL-C-15328.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the current version before use.

3.6.14.3 Priming. Following surface preparation as specified in 3.6.14.2, metal to be painted shall be given one coat of primer specified in 3.4.11. Primer shall be allowed to dry thoroughly before enameling. The primer shall not be applied to rubber, glass surfaces, or over data plates.

3.6.14.4 Enameling. Primed surfaces shall be coated with enamel specified in 3.4.12, or 3.4.12.1 as applicable. Surfaces shall be free from streaks, drops, sags, pin holes, checks, cracks, orange peeling, areas of thin film or no film, or other evidence of poor workmanship.

3.6.14.5 Parts for operation and maintenance. All lubrication fittings, drain plugs or cocks, valve handles, and the positive battery terminals shall be painted red.

3.6.15 Identification marking.

3.6.15.1 Component marking. Each major item of equipment and replacement parts shall be marked for identification in accordance with the requirements of MIL-STD-130. All data plates, shall be aluminum or brass and unless otherwise specified on drawings shall be not less than 1/32-inch thick.

3.6.15.2 Marine Corps marking. For Marine Corps procurements of type I units (see 6.2), in addition to the marking required for the end item, each cabinet shall have stencilled or painted in gothic style lettering, "USMC" 2 inches high and directly under the name "LAUNDRY" 1 inch high, centered on the outside of the two sides and the rear wall. Color shall be semi-gloss yellow No. 23538 of FED-STD-595. For the Marine Corps, data plates and information to be imprinted thereon by the supplier shall be furnished by the procuring activity.

3.6.15.3 Component nameplates. Those components having nameplates shown on drawings, shall have the markings permanently printed on aluminum plates in accordance with type III, class 2 of MIL-P-514. When required, a nameplate of the size and containing the information as specified in invitation for bids, shall be permanently attached to the laundry trailer in the location specified (see 6.2).

3.6.15.4 Lubrication instructions. A complete laundry unit lubrication instruction chart on either a metal plate as specified in 3.6.15.1 or a decalcomania shall be affixed to the type I and type II units in convenient and conspicuous locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

3.6.15.5 Control panel wiring diagrams. The information shown in the index, legend, and schematic on Drawing 6-2-1983 shall be reproduced on a metal plate as specified in 3.6.15.1 approximately 16-by 22-inches and permanently affixed to the inside of the control box covers of the type I and type II units.

3.6.15.6 Marine Corps registration number. For the Marine Corps, (see 6.2) each type I vehicle (trailer) shall have stencilled or painted gothic style lettering, "USMC" and a registration number. Location of markings shall be in accordance with MIL-STD-642. Color shall be semi-gloss yellow No. 23538 of FED-STD-595.

3.7 Workmanship.

3.7.1 Metal fabrication. Metal sheets, shapes, rods, and bars used in the fabrication of the unit shall be free of kinks and unspecified sharp bends. The straightening or forming of materials before fabrication shall be done by methods which will not be harmful to the metal. Shearing shall be done neatly and accurately. Corners shall be square and true. Bends of a major character and embossing shall be made with metal dies or fixtures to provide uniformity of size and shape. All bolts, studs, nuts, and screws shall be drawn tight. All bolt holes shall be accurately drilled and burrs shall be removed.

3.7.2 Riveting. Holes for rivets shall be accurately punched or drilled and any burrs that would prevent proper seating of rivets shall be removed. Rivets, when driven, shall have the head in full contact with the surface of the riveted metal.

3.7.3 Welding. The surfaces of parts to be welded shall be free from oxide, scale, paint, grease, and other foreign matter. Welds shall be continuous, sound, and free from porosity, cracks, incomplete fusion, and deformation of material. All scale and flux deposits (when flux is used) shall be removed from the finished welds.

3.7.4 Textile components. Cloth components of type II units shall be clean and free of holes, cuts, tears or cloth defects such as smashes, weak places, broken or missing yarns. Webbing and tapes shall contain no frayed or scalloped edges and rope components shall be free of cuts or abrasions. Thread tension shall be maintained so there shall be no loose stitching and seam allowances shall be maintained with seams properly sewed so that no runoffs, twists, pleats, puckers or open seams shall result. Care shall be taken to insure that no needle chews occur. All thread ends shall be trimmed. Leather components shall be clean and free of holes, brand marks or deep scratches. Grommets shall be securely clinched without cutting the material.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the currenversion before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 The washer extractor assembly, the tumbler and air heater assemblies and the water heater assemblies of the type I and type II units, as applicable, shall be inspected for conformance to this specification for acceptance by the Government, by the contracting officer or his authorized representative at the component manufacturer's facilities.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, it shall be examined in accordance with 4.4.3.1, specified dimensions, and tested as specified in 4.5.1 through 4.5.6 for type I unit and 4.5.1 through 4.5.3 and 4.5.6 for type II unit. The presence of any visual defect, any dimension not within the specified requirements, or failure to pass the tests shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Component and material inspection. The supplier shall insure that all components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards unless excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.1.1 Canvas covers inspection. The canvas covers specified in 3.4.9 shall be examined for the defects listed in table I to determine compliance with specified requirements in 3.7.4. The lot shall be expressed as the number of canvas covers offered for inspection at one time. The inspection level shall be level II with an acceptable quality level (QAL) of 4.0 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Covers, seams or stitching	Do not fit correctly	X	
	Wrong seam or stitch type	X	
	Thread breaks not backstitched		X
	One or more stitches less than minimum required		X
	One or more stitches in excess of maximum required		X
	Loose stitching		X
	Seam allowances not maintained	X	
	Runoffs, twists, pleats, puckers or open seams	X	
	Needle chews		X
Canvas	Not as specified	X	
	Dirty, holes, cuts, tears	X	
	Smashes, weak places, broken or missing parts	X	
Leather	Not clean, holes, brandmarks, deep scratches	X	
Grommets	Not securely clinched	X	
	Cut through material		X
	Bent out of shape		X

4.4.2 In-process inspection.

4.4.2.1 Process examination. Examination shall be made of the following processes to establish that no deviation is made from indicated requirements. Whenever a deviation is noted, correction shall be made to the affected items and lot in process.

(a) Wiring - The applicable wiring connectors shall be examined for soldering, taping and staking (see 3.6.2).

(b) Polyester thread - The polyester thread shall be examined during sewing to determine that lubricant is not being used (see 3.6.7.1).

(c) Lubrication - Application of lubrication to main cylinder bearing (see 3.6.10).

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

(d) Application of felt to metal - The application of felt to the metal lining of the cylinder storage cabinet shall be examined (see 3.6.11).

(e) Galvanizing - Verify that water drain tank has been galvanized (see 3.6.14.1).

(f) Surface preparation - The surface preparation of all exposed or exposable metal surfaces plated or not shall be examined (see 3.6.14.2).

(g) Priming - The application and drying of the primer shall be examined (see 3.6.14.3).

(h) Metal fabrication - The metal fabrication shall be examined for kinks, sharp bends, square and true corners, and to determine bends and embossing are made by the use of metal dies or fixtures (see 3.7.1).

(i) Riveting - The punching and drilling of rivet holes shall be examined for burrs, and the heads of the driven rivets shall be examined for full contact with metal surfaces (see 3.7.2).

(j) Welding - The surface of parts to be welded shall be examined for oxide, scale, paint, grease or foreign matter. The welds shall be examined for soundness, porosity, cracks, incomplete fusion and deformation of materials. The finish welds shall be examined for the removal of scale and flux deposits (see 3.7.3).

4.4.2.2 Intermediate testing. The components shall be tested for the applicable characteristics specified in table II to determine compliance with specified requirements. Test shall be applicable to all units unless otherwise specified herein. Any nonconformance shall be cause for rejection of the component.

TABLE II. Intermediate tests

Characteristics	Requirement paragraph	Test method
Electric motors	3.4.16	4.4.2.2.1
Washer-extractor assembly and timer	3.4.14 and 3.4.19	4.4.2.2.9
Tumbler and air heater assembly and timer	3.4.14 and 3.4.20	4.4.2.2.10
Engine-generator, power cable and wiring connections	3.6.2	4.4.2.2.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

TABLE II. Intermediate tests (cont'd)

Characteristics	Requirement paragraph	Test method
Water pump and water heater assembly - direction of rotation of motor	3.6.2	4.4.2.2.3
Water pump assembly	3.6.3	4.4.2.2.4
Outside water vessel and firebox, leak test (after welding and prior to painting).	3.6.4.1	4.4.2.2.5
Outside water vessel and firebox, leak test (after completion and installation of water blender system).	3.6.4.1	4.4.2.2.5
Water heater functional test	3.6.4.2	4.4.2.2.6
Suction and drain hose assemblies, leak test	3.6.6	4.4.2.2.7
Bonding of felt	3.6.11	4.4.2.2.8

* 4.4.2.2.1 Washer and extractor motors. The washer and extractor motors shall be connected to load and tested for performance in accordance with the procedures outlined in the NEMA Standards Publication No. MG-1 - Motors and Generators. Inability to meet the requirements of 3.4.16.1 and 3.4.16.2 shall constitute failure of the test.

* 4.4.2.2.2 Engine-generator, power cables and wiring connections. The engine-generators, power cables and wiring connections shall be tested to determine compliance with the polarity requirements of 3.6.2, as applicable. The engine-generator shall be adjusted for correct full load operation. Inability to meet the requirements of 3.6.2 shall constitute failure of the test.

* 4.4.2.2.3 Water pumps and water heaters. The water pumps and water heaters shall be tested to determine compliance with the polarity requirements of 3.6.2.

* 4.4.2.2.4 Water pump assembly. One water pump per procurement, if from the same manufacturer, shall be tested in accordance with applicable sections of the centrifugal pump test code of the Hydraulic Institute for compliance

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the current version before use.

with the requirements of 3.6.3. Characteristic curves including total head, net positive suction head, horsepower and efficiency shall be plotted on the chart from this test while operating under the conditions set forth in 3.6.3. This test shall be performed at the pump manufacturer's plant and certification of this test will be acceptable and representative for the total number of pumps involved. Inability to meet the requirements of 3.6.3 shall constitute failure of the test.

* 4.4.2.2.5 Leak test, outside water vessels and fire box. Cap or plug all but one connection and fill entire vessel with water. The unit shall be hydrostatically tested at a pressure of not less than 75 psig for a period of five minutes to determine compliance with 3.6.4.1. Inability to meet the requirements of 3.6.4.1 shall constitute failure of the test.

4.4.2.2.6 Functional test (water heater). The completely assembled water heater shall be connected to a source of water that will supply a rate of 16 gallons per minute, plus or minus 2 percent, through the boiler. Thermometers shall be located in the inlet and outlet water of the heater. The heater shall be operated for 15 minutes with the burner fuel pressure maintained at 100 psig to determine compliance with 3.6.4.2. This test shall be conducted utilizing a commercial grade of gasoline. At the completion of this test the complete heater assembly shall be examined for water leaks. This examination shall include the removal of the front cover and burner assembly to allow for examination of the firebox. The inlet and outlet water connections shall be closed by valves or plugs prior to water leak examination to maintain a pressure within the heater of at least 55 psig. Valves or plugs as required shall be furnished by the supplier. Inability to meet the requirements of 3.6.4.2 shall constitute failure of this test.

4.4.2.2.7 Drain and suction hose. After assembly of the fittings to the hose (suction, drain, and discharge), a lot sampling of each type hose assembly shall be performed with an AQL of 1.0, level II to determine the fittings and assemblies comply with requirements of 3.6.6 and that the hose does not leak when the fittings and a minimum of 6 inches of hose on either side of the fittings are submerged into water. The hose shall be tested with 15 psig internal air pressure and be submerged for a period of not less than 5 minutes.

4.4.2.2.8 Bonding of felt. Three days after application of the bond, attempts shall be made to peel the felt away by thumb to determine compliance with the requirements of 3.6.11. Inability to meet the requirements of 3.6.11 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

* 4.4.2.2.9 Washer-extractor test. The washer-extractors and their control panels shall be connected to power and shall be operated for two (2) hours with 60 pounds of wool garments without detergents. The operation shall include one (1) completely automatic cycle and one (1) cycle with the controls operated manually. The equipment shall be tested for compliance with the requirements of 3.4.19. The electric timer and alarm shall be checked for compliance with 3.4.14. Inability to meet the requirements of 3.4.14 and 3.4.19 shall constitute failure of this test.

* 4.4.2.2.10 Tumbler and air heater assembly. The tumbler and air heater assembly shall be connected to power and operated for two (2) hours. The test shall be conducted using a commercial grade of gasoline. The equipment shall be tested for compliance with the requirements of 3.4.20. Measurement of the drying air temperature in the tumbler shall be verified using a calibrated glass stem thermometer inserted in the drying air exhaust plenum chamber. The electric timer and alarm shall be checked for compliance with the requirements of 3.4.14. Inability to meet the requirements of 3.4.14 and 3.4.20 shall constitute failure of this test.

4.4.3 End item inspection.

4.4.3.1 Visual and dimensional examination. Each fully assembled end item shall be examined for completeness of assembly, presence and adequacy of components, marking, quality of workmanship, and dimensions to assure that the end item is manufactured in accordance with specified requirements. Whenever a deviation to specification requirements is noted, corrective action shall be made. Failure to make correction shall be cause for rejection of the end item.

* 4.4.3.2 Testing of the end item. Each unit of production shall be tested as specified in Table III. Failure to pass any test shall be cause for rejection of the unit. When a first article is not required, the initial production unit shall be tested as specified in 4.5.1, and when applicable, as specified in 4.5.6. Failure of the initial production unit to pass the tests shall be cause for rejection of the unit and similar units produced.

TABLE III. End item tests and sequence

Test sequence	Requirements paragraph	Test paragraph	Test	Type unit
1	3.5.4 & 3.6	4.5.4, 4.5.4.1 4.5.4.2	15 mi. road & terrain	I only
2	3.5.2	4.5.2	Cotton garment drying test	I and II

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

TABLE III. End item tests and sequence (cont'd)

Test sequence	Requirements paragraph	Test paragraph	Test	Type unit
3	3.5.3 & 3.6	4.5.3	Operational test procedure	I and II
4	3.5.3 & 3.6	4.5.3.1	Air compressor and compressed air system	I and II
5	3.5.3 & 3.6	4.5.3.2	Water pump and water heater	I II (water pump only)
6	3.5.3 & 3.6	4.5.3.3	Washer-extractor and washer-extractor control panel	I and II
7	3.5.3 & 3.6	4.5.3.4	Drying tumbler	I and II

4.4.3.3 Certificate of compliance. The supplier shall furnish a certificate of compliance, certifying that the units being furnished under this specification conform to the applicable standards of NFPA-70, ASTM A386 and MG-1. The Government reserves the right to check test a laundry unit to determine the validity of the certification.

4.4.4 Examination of preparation for delivery. An examination shall be made to determine that preservation, packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be as indicated in table IV. The sample unit shall be one laundry unit fully prepared for delivery. The lot shall be the number of laundry units in the inspection lot. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examination	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Preservation	Preservation improperly applied or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

TABLE IV. Examination of preparation for delivery (cont'd)

Examination	Defect
Materials	Component missing, damaged or otherwise defective.
Workmanship	Inadequate application of components such as loose strapping; components not secured; plywood cap not adequately bolted; bolts missing.

4.4.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with MIL-C-104 or PPP-C-650, examination for defects in closure and anchoring shall be in accordance with the applicable container specification.

4.5 End item tests. The supplier shall furnish the batteries for the tests specified in 4.5.1 and 4.5.2 for the type I unit.

* 4.5.1 Endurance test. The laundry units shall be loaded with 60 pounds of woolens (laundry) in the washer extractor and 30 pounds of woolens in the drying tumbler for each cycle with the tumbler operating at a temperature of approximately 200° F. The washer-extractor and the tumbler shall be operated simultaneously for 160 consecutive hours. The operation shall be at the rate of two completed wash cycles per hour. The equipment shall be examined for compliance with the requirements of 3.5.1. Inability to meet the requirements of 3.5.1 shall constitute failure of this test.

4.5.2 Cotton garment drying test. The washer-extractors of type I and type II units shall be loaded with 60 pounds of dry cotton garments (laundry) and operated automatically under normal conditions for one complete cycle of the cotton formula. The extracted laundry, in 30 pound batches shall then be placed in the drying tumbler. With the tumbler operating at approximately 250° F. for 13 minutes per batch, the equipment shall comply with the requirements of 3.5.2. Inability to meet the requirements of 3.5.2 shall constitute failure of this test. Road tests specified for type I units shall be conducted prior to this test.

4.5.3 Operational test procedure. The type I or type II laundry system shall be operated continuously through three complete cycles within a two hour period with garments (cotton or wool) and with the engine-generator furnishing the necessary power to operate the type I laundry system. If during this test there is a failure, the laundry unit shall be repaired and the complete

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

test repeated. After completion of all operational tests for the type I unit, there shall be a red caution tag wired in a conspicuous place on the generator. The tag shall contain the following instructions: "This generator was operationally tested with the assembled laundry unit. When initially operated, motors shall be checked for correct rotation, electrical grounds shall be tested, fuses and thermal elements checked, lubricate where required and check drain pans for leaks". When testing for operational requirements specified in 3.5.3 and 3.6, determination shall be made to establish that compliance with the requirements of this specification have been met. The test procedures as specified in 4.5.3.1, 4.5.3.2, 4.5.3.3 and 4.5.3.4 cover the type I and II laundry systems, as applicable for verification of the operation of the air compressor, water pump, water heater, washer-extractor, control panel and drying tumbler. Each operation shall be conducted sequentially as shown (see 4.4.3.2). All deficiencies (leaks, poor electrical connections or contacts, loose parts or components), shall be corrected. Inability to meet the requirements of 3.5.3 and 3.6 shall constitute failure of this test.

4.5.3.1 Air compressor and compressed air system.

(a) Close air tank drain valve, start and check for correct direction of rotation indicated by the "arrow" located on the top of the compressor. Observe pressure on pressure gage at the end of the air compressor tank.

(b) At 95 lbs. pressure with the generator stopped, examine all air lines for leaks including all fittings and the air connections inside the washer-extractor control panel, especially the electro-pneumatic valves. Examine the manifold under the washer-extractor control panel for end leakage.

(c) Inspect all items and screws, holding the air compressor to the air compressor mounting bracket and the air compressor mounting bracket to the drying tumbler for correct fit and tightness. When the air compressor is operated without the generator operating, observe for unusual noise level or quietness of operation.

(d) During all operations the air compressor should cause 95 psig to be observed at the tank and should stop after this pressure is reached. The air compressor should start when the needle on the gage indicates 75 psig.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the currentversion before use.

4.5.3.2 Water pump and water heater.

(a) Observe the direction of rotation when the pump is operated from the pump outlet receptacle located on the back end of each trailer. Each pump shall be checked with the cable furnished for the unit, and this pump shipped with the unit.

(b) Inspect all attaching screws, conduits and other components for correct fit and tightness.

(c) Vent the controls on top of the water heater by the red handled valve to which a copper drain line is connected until the water stream emitted from this line is clear and without air bubbles. Repeat this procedure for the copper drain line located below the control column.

(d) With the water pump operating at full pressure examine the water heater and all water line connections for leaks.

(e) Observe that all water vent lines are brought below the deck plate.

(f) Release the locking lever rod inclined to the float of the low water cut-off control and move it completely in and out several times to determine if the float is functioning properly. The rod shall be fully extended outward when operating.

(g) When observed on the fuel pressure gage, the operating pressure should be 80 psig; if over 80 psig, refer to the manual operating instructions for the setting of the fuel pressure.

(h) Observe the spark through the spark observation port glass. The spark should be clear blue and approximately 3/16 wide. If a purple spark is observed, remove the electrode assembly and adjust electrodes in accordance with the manual instructions.

(i) Adjust the fuel valves and operate burner. With the burner operating, adjust shuttle or air intake fan to provide practically smokeless combustion and fasten in position in accordance with manual instructions.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the currentversion before use.

(j) Turn the adjusting knob on the temperature control thermostat on back of heater curved shell until the arrow points to 4. Observe the temperature of the thermostat on top of the water heater. After initial start, the temperature indicator should read approximately 160 F with the No. 4 setting. When the heater flame shuts off adjust upward or downward if necessary.

(k) When the washer-extractor is in the extract cycle observe if the fuel valve solenoid on the water heater closes. The pump fan and spark will continue to run during this cycle but there should be no flame. The heater should not cycle at control temperatures or below. If cycling occurs, examine the heater wires going to the control panel for correctness of installation and inspect controls.

4.5.3.3 Washer-extractor and washer-extractor control panel.

(a) Place a formula cylinder chart drum in position on the control panel in accordance with instructions in the manual.

(b) Inspect electrical "fingers" for contact with the screen where cutoffs are on the record chart.

(c) Inspect the lock on the control drum cycle timer so that the contact bar operates freely.

(d) Inspect the clearance between the left hand stud and right hand drum head. This clearance should be approximately .015 to permit free rotation of the drum head when in operating position.

(e) Inspect the 3 set screws on the friction clutch hub of the drum timer shaft on the left hand side for tightness. These set screws must be securely tightened on the flat side of the motor shaft.

(f) Inspect the cycle timer charts for correctness of formula (cotton or wool).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

(g) Inspect the time delay relay in the panel so that when the brake is operated at the end of the extraction cycle a period of approximately 40 seconds elapses before the washer-extractor drive shifts back into the wash position and the air safety lock on the door is released.

(h) Observe the water level during the wash and rinse cycles. This level should be 7 to 8 inches for low level and 10 to 11 inches for high level when the washer cylinder is loaded. Refer to manual for water level adjustment if necessary to adjust.

(i) With the washer-extractor operating in wash position, the door shall not leak.

(j) Inspect the drain valve for leaks when the drain is operating manually and automatically.

(k) Inspect the formatrol cycle timer "stop finger" and "signal finger" for correct functioning.

(l) Inspect operation of the electrical door safety switch. When the door is open the basket will not rotate.

(m) Operate the washer-extractor through one wash-rinse-extract cycle automatically. Remove the control drum programmer from the panel and then operate the unit manually, through one complete cycle.

NOTE: The drain valve must be open before the washer-extractor will go into extract position when operating manually.

(n) If the washer-extractor drive mechanism fails to function properly, observe the drive slides, which shift the motors, for paint, burr marks and proper adjustment. When the shifting mechanism is operating properly the drive will shift 1/4 inch to the left and come up against a rubber bumper when going into the extract position. Upon finish of the extract cycle, the drive will shift into the wash position after stopping and when the air releases the door lock. When shifting into extract position the belts from the intermediate shaft and the extractor motor should loosen sufficiently to prevent driving the washer motor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

(o) Inspect the drive compression spring for a compressed length of 4 inches under compression. (wash position).

(p) Inspect the drive shifting air cylinder pre-stressing for extension of the cylinder rod to 1/4 inch beyond the cylinder when the drive is in wash position.

(q) Operate the manual timer on top of the control panel and observe for correct operation.

(r) Observe that the pre-extract phase rotations of the washer-extractor is clockwise.

(s) Observe that the air cylinder door lock firmly latches and locks the door during extraction cycle and remains locked until the time delay mechanism shifts the drive to wash position and simultaneously releases the air lock. This operation should be approximately 40 seconds. (time delay relay setting).

(t) Observe the operation of the washer cylinder brake. When fully loaded the brake should stop the cylinder from full extraction speed in approximately 30 seconds after extract phase.

4.5.3.4 Drying tumbler.

(a) Push the "start" button of the control switch on the left hand side of the drying tumbler and observe that the tumbler blower and burner are rotating in the proper direction. This should be done after the fuel lines from a 55-gallon drum are connected to the drying tumbler burner.

(b) Push the "start" button of the lower switch on the left hand side of the drying tumbler. This should open the fuel solenoid valve and start the electrical spark inside the burner. Do not open the "red" fuel valve handle of the shutoff valve at this point.

(c) Check the oil level in the gear reducer on the back of the tumbler for correct level.

(d) When the tumbler is running, open the door; the tumbler should stop rotating and the solenoid fuel valve should close.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

(e) Operate the electrical timer on top of the control switch on the left hand side of the tumblet. When the timer rotates to zero position, the dryer horn should sound.

(f) When the tumbler burner is running, adjust the fuel pressure to 100 psig, then open shut-off valve to burner and the tumbler flame should ignite.

(g) Observe the setting of the thermostat and thermometer on the top and left-and side of the plenum chamber of the drying tumbler. The control thermostat should be set for a differential of plus or minus 5 degrees F. in accordance with operating manual instructions. Observe the thermometer dial. Dial figures should be facing in an upright position.

(h) Inspect for rough edges on the inside of the door frame. This frame must be smooth.

(i) Inspect the alignment of the tumbler cylinder drive motor and gear reducer.

(j) With tumbler in the off position observe adjustment of fan drive belt so that a 3/4 inch up and down free movement is obtained.

4.5.4 15-mile road and terrain. Each completely assembled type I laundry unit mounted on the Government furnished trailer, shall be towed fully loaded over not less than 5 miles of paved roads at speeds up to fifty (50) miles per hour (mph), as road and weather conditions permit (see 4.5.4.1); over not less than 5 miles of graveled roads at speeds averaging thirty-five (35) mph (see 4.5.4.1); and over not less than 5 miles of open terrain and cross-country at speeds averaging 5 mph (see 4.5.4.2). The laundry unit shall comply with the requirements of 3.5.4 and 3.6. At completion of the test, the supplier shall retighten all nuts, bolts, and screws before offering the unit for acceptance by the Government. A canvas cover fabricated in accordance with paragraph 3.4.17 (c) shall cover the trailer mounted laundry during these tests. One cover may be used during the tests and this cover shall not be included with those furnished to the Government with the laundries. Inability to meet the requirements of 3.5.4 and 3.6 shall constitute failure of this test.

4.5.4.1 Paved and graveled roads. The paved and graveled road tests shall each include not less than 20 quick starts and stops on

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

grades of not less than 5 percent or greater than 10 percent. Fifty percent of the starts and stops shall be made on ascending grades and 50 percent on descending grades.

4.5.4.2 Open terrain and cross country. The open terrain and cross country course shall have surface irregularities consisting of mounds, rocks, brush and irregularities normally found in cross country or open terrain. The trailer shall be pulled along this course not less than five (5) miles at speeds up to a maximum of ten (10) mph. The test drive shall include ten (10) abrupt stops, ten (10) abrupt starts, ten (10) sharp left hand turns, and ten (10) sharp right hand turns.

4.5.5 500 mile road test. The completely assembled type I laundry unit, when ready, shall be tested by the Government at a specified location (see 6.2). The test shall consist of the following:

(a) 125 miles over gravel roads at speeds averaging 35 mph.
(b) 125 miles over Belgian block course averaging 10 mph.
(c) 125 miles over hilly cross-country at speeds averaging 10 mph.
(d) 125 miles over level cross-country at speeds averaging 10 mph.

The laundry unit shall then be examined for compliance with 3.5.4. Inability to meet the requirements of 3.5.4 shall constitute failure of this test.

* 4.5.6 Electromagnetic compatibility. When electromagnetic compatibility is required, the first article or initial unit production, as applicable, shall be tested by the supplier in accordance with test methods CE03 and RE02 of MIL-STD-462. The Government reserves the right to witness tests performed by the supplier or an independent testing agency. The supplier shall furnish the contracting officer written certification that the Interference Control Plan, the EMI/EMC Test Plan, the Electromagnetic Test Report and the requirements meet MIL-STD-461.

5. PREPARATION FOR DELIVERY

* 5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Preservation hereinafter specified shall be in accordance with the method and material requirements of MIL-P-116. Varnish hereinafter specified shall conform to MIL-V-13011. Tape hereinafter specified shall conform to PPP-T-75. Surfaces to which tape is applied shall be free of dirt, grease, and any other foreign matter. The tape shall not be applied direct to plastic lenses, gauge windows, etc. Such surfaces shall be protected with kraft paper or fiberboard prior to application of the tape.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the currentversion before use.

5.1.1.1 Drainage of water systems after factory testing. The entire water system of the units including the water heater, water pumps, water hoses, tumbler, washer-extractor, etc., shall be thoroughly drained and parts blown out and dried with dry compressed air. All valves, petcocks, etc., shall be in the open position. A red tag shall be wired in a conspicuous place on the units indicating that the entire water system has been completely drained.

5.1.1.2 Drainage of fuel system after factory testing. The fuel lines, water and tumbler heater, fuel pumps, fuel filter, engine carburator, solenoid fuel valves, and all fuel connections shall be completely drained and thoroughly dried and replaced. The exterior surfaces of all flexible fuel lines shall be coated with varnish.

5.1.1.3 Disassembly.

5.1.1.3.1 Type I. The step assembly shall be removed from the trailer and placed in the drain bin.

5.1.1.3.2 Type II. The four wheels shall be removed from the clothes transfer bin and the transfer bin shall be bolted to the tumbler unit using the four bolts and nuts removed during disassembly of the wheels. The track assembly shall be disassembled from the laundry unit and bolted to the washer assembly.

5.1.1.4 Cleaning. The complete laundry shall be cleaned process C-1 and thoroughly dried prior to application of preservative.

5.1.1.5 Painting. Painted surfaces on which the paint film has become damaged or defective shall be cleaned as specified in 5.1.1.4 and repainted using materials of the same quality and color as those removed.

5.1.1.6 Preservation. All cleaned, uncoated ferrous metal surfaces shall be coated with a preservative. Surfaces that do not contact other surfaces in operation shall be coated with type P-1 preservative, and surfaces that contact other surfaces in operation shall be coated with type P-2, P-6 or P-7 preservative, except those components preserved as specified hereinafter.

5.1.1.6.1 Tumbler. All exposed, uncoated, ferrous metal surfaces of the tumbler, cleaned as specified, shall be coated with type P-6 preservative. The door switch handle and hinge shall be coated with type P-7 preservative. All exposed wiring shall be coated with varnish. The belts shall be removed, uncoated surfaces of the sheaves coated with primer conforming to TT-P-664, thoroughly dried and the belts replaced with tension relieved. The exhaust ports, control box and burner air intake shall be sealed or covered with a combination of barrier material conforming to type I or II, grade A of MIL-B-121 and tape. All openings into and

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the currentversion before use.

around switches, louvers, inlet and outlet fittings, access doors, receptacles, air vent, surfaces of door latch, timer, and thermometer face shall be sealed with tape. The timer shall be secured from movement with tape.

* 5.1.1.6.1.1 Caution tag. A red caution tag giving explicit deprocessing instructions shall be wired in a conspicuous place on the tumbler. These instructions shall include a warning to the effect that all tape and preservatives shall be removed and belt retensioned prior to putting the tumbler in operation.

5.1.1.6.2 Air receiver. The interior of the air receiver shall be drained of any accumulated moisture, thoroughly dried and fogged with type P-10 preservative. The drain outlet shall be closed.

5.1.1.6.3 Washer-extractor assembly (type I) and washer assembly (type II). The cleaned and lubricated uncoated surfaces of nonmoving components of the washer shall be coated with type P-1 preservative. Uncoated, ferrous metal surfaces of the braking mechanism, including braking surfaces of the face of the brake drum, shall be coated with a thin film of primer conforming to MIL-P-46093 or TT-P-664. Care shall be exercised to prevent primer from contacting the brake lining. The brake and shoe shall be coated with type P-6 preservative. The water level gauge shall be completely covered with barrier material as specified in 5.1.1.6.1 and the barrier secured with tape. All inlets and outlets, shell door, soap trough cover, all valve handles in open position, timer, power takeoff, all switches in off position, safety switch can arm, nameplate, temperature gauge face, etc., shall be secured and sealed with tape. The washer-extractor shall be secured by means of the tiedown bar and three supports provided. Uncoated surfaces of sheaves of the type II unit shall be coated with compound conforming to TT-P-664.

5.1.1.6.3.1 Caution tag. A red caution tag giving explicit deprocessing instructions shall be wired in a conspicuous place on the unit. These instructions shall include a warning to the effect that all tape, preservative and coverings shall be removed prior to putting the unit in operation.

5.1.1.6.4 Fire extinguisher. All exposed uncoated ferrous metal surfaces of the fire extinguisher shall be coated with type P-1 preservative and secured in place.

5.1.1.6.5 Washer-extractor control panel assembly (type I unit). All wiring and uncoated surfaces in the control panel subject to corrosion, except electrical contact points, shall be coated with varnish. Varnish shall be applied in such a manner as not to affect the operation of the control panel. The formula control records, mounted on the drums, shall be individually wrapped in barrier material specified in 5.1.1.6.1 and the wrap secured with cotton

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

tape or twine. The wrapped formula control records and drums shall be secured in the cylinder storage bins and the bin door closed and secured with latch provided. The latch shall be secured with tape. All openings into the control panel assembly shall be sealed with tape.

5.1.1.6.6 Washer control panel assembly (type II unit). The formula control records, mounted on the drums, shall be individually wrapped in barrier material specified in 5.1.1.6.1 and the wrap secured with cotton tape or twine. The wrapped formula control records and drums shall be secured in the cylinder storag bins and the bin door closed and secured with latch provided. The latch shall be secured with tape. All openings into the control panel assembly shall be sealed with tape.

5.1.1.6.7 Trailer chassis (type I unit). Each trailer chassis shall be preserved in accordance with the level A requirements of MIL-STD-281.

5.1.1.6.8 Engine-generator assembly (type I unit). Each engine generator assembly, including batteries and electrolyte, shall be preserved in accordance with the level B preservation and packaging requirements of MIL-G-52280, except that the reference to securing the base of the container shall not apply.

5.1.1.7 Packaging.

5.1.1.7.1 Type I unit.

5.1.1.7.1.1 Toolbox. The box shall be closed, the hasp secured with the snap provided, and the lid sealed with tape.

5.1.1.7.1.2 Water supply pump. The water supply pump shall be secured in place as shown on Drawing 6-2-1900.

5.1.1.7.1.3 Electrical cables, hoses, suction strainer, fire extinguisher and canvas cover. Detachable electrical cables and light extension cords, fire hoses, and suction hoses shall be coiled and packaged separately in snug-fitting fiberboard boxes conforming to type CF (variety optional) or SF, class domestic, grade 275, style RSC of PPP-B-636. The packaged components shall then be placed in the drain bin and secured in a manner as to prevent movement of damage while in transit. The canvas cover for the laundry unit shall be completely folded and, together with the suction strainer and fire extinguisher, packaged in fiberboard box specified and the box secured to the trailer in a manner to prevent movement or damage while in transit.

5.1.1.7.1.4 One and one-half, five, and seven-inch exhaust ducts. One and one-half inch exhaust duct shall be placed within the 5-inch exhaust duct and the 5-inch exhaust duct placed within the 7-inch exhaust duct, and the ducts

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the current version before use.

secured in a manner as to prevent movement during transit. All the duct sections shall then be secured to the trailer chassis with the straps provided.

5.1.1.7.1.5 Flexible 12-inch exhaust duct. The flexible 12-inch exhaust duct shall be completely folded and wrapped in 30-pound kraft paper or barrier material specified in 5.1.1.6.1 and the wrap secured with cotton cord, twine or tape. The wrapped duct shall be secured within the tumbler.

5.1.1.7.2 Type II unit.

5.1.1.7.2.1 Water supply pump. The water supply pump shall be secured to the tumbler assembly as shown on Drawing No. 6-1-1000.

5.1.1.7.2.2 Drain pan assembly, 1-1/2 inch diameter suction, fire and drain hoses, ground rod, barrel plug adapter, and transfer bin wheels. The drain pan assembly, 1-1/2 inch diameter suction, fire, and drain hoses, ground rod, barrel plug adapter for fuel lines, and transfer bin wheels shall be placed in the clothes transfer bin. The drain pan shall be positioned as shown on Drawing No. 6-1-1000. The components shall be positioned around the drain pan in a manner to prevent its movement while in transit. The barrel plug adapter and transfer bin wheels shall be individually wrapped in cushioning material and the wrap secured with tape, cord or twine prior to placing in the clothes transfer bin.

5.1.1.7.2.3 Electrical cable, 3-inch diameter drain hose, and suction strainer. The removable electrical cable, 3-inch diameter drain hose, and suction strainer shall be placed within the washer and the door securely closed. Prior to placing within the washer, the suction strainer shall be packaged in a commercial fiberboard box and the box securely closed, and the cable and hose shall be compactly coiled and the coil secured.

5.1.1.7.2.4 Tumbler hose assembly. The tumbler hose assembly shall be placed on the washer assembly as shown on Drawing No. 6-1-1000 and secured with means provided.

5.1.1.7.2.5 Flexible 12-inch exhaust duct. The flexible 12-inch exhaust duct shall be compactly folded and wrapped in 30-pound kraft paper, or barrier material specified in 5.1.1.6.1, and the wrap secured with tape, cord or twine. The wrapped duct shall be secured within the tumbler.

5.1.1.7.2.6 Washer assembly. The washer assembly shall be secured by means of the shipping block and shipping angles as shown on Drawing No. 6-1-1000. The turnbuckles shall be tightened until the washer seats firmly on the shipping blocks.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Units shall be preserved and packaged to afford adequate protection against corrosion, deterioration, and damage during shipment from the supply service to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Type I unit. A close-fitting plywood cap shall be fitted over the laundry unit so that it rests on the trailer deck. The cap shall consist of two sides, two ends, and a top, and shall be constructed in accordance with type I, class 2 of MIL-C-104, except plywood shall conform to group A, type I, grade 3-4, or group B, with exterior glue, of NN-P-530 and lower frame members of the sides and ends shall be nominal 1 by 6 inch. Other frame members shall be those specified in MIL-C-104 for panel members for a net weight of 4000 pounds, except where interference with trailer components require that dimensions of members may be changed. The 1 by 6 inch lower frame members shall be laid on edge on the trailer deck and bridged to provide clearance for the trailer wheels and other projection on the trailer deck. The cap shall be positioned in such a manner as not to interfere with lifting eyes. The cap shall be bolted to the trailer by running the plywood sheathing below the 1 by 6 inch bottom member, drilling holes through the plywood and trailer rail member, and bolting with 3/8 inch diameter zinc or cadmium plated machine bolts, flat and lock washers and nuts. Flat washers shall be located under the bolt head next to plywood, and lock washers shall be located under the nut next to trailer rail member. Four bolts shall be used on each side of the trailer, and two on the back. Plywood shall be cut out to provide clearance for reflecting lights on the trailer.

5.2.1.1.1 Railway shipment. For railway shipment, tire pressure shall be increased 10 pounds over the required running pressure. Loading of vehicles for railway shipment shall be on open-top cars in accordance with Rules Governing the Loading of Department of Defense Materials on Open-Top Cars, Pamphlet MD-7 of the Association of American Railroads.

5.2.1.1.2 Highway haulaway shipment. The units shall be placed on bed or rails of haulaway vehicles so that the load is evenly distributed and secured. Parking brakes shall be locked and the levers wired or blocked in position. Loading of units for haulaway shall be in accordance with the Department of Transportation Motor Carrier Safety Regulations. Tire pressure shall be increased 10 pounds over the required running pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

5.2.1.1.3 Highway towaway shipment. No processing of the trailer units running gear shall be performed prior to highway shipment that would impair necessary operation or safety transit. Towaway rules for shipment by driveaway shall be in accordance with the Department of Transportation Motor Carrier Safety Regulations. Tire pressure shall be the required running pressure. Processing of the trailer units running gear, not accomplished prior to highway shipment, shall be performed at intermediate destination when vehicles are to be placed in storage or shipped overseas.

5.2.1.2 Type II unit.

5.2.1.2.1 Washer assembly. Each washer assembly preserved and packaged as specified in 5.1, shall be packed in a crate conforming to type I, class 1 or 2, style a or b of MIL-C-104. Prior to packing, the washer assembly shall be covered with the cover provided, and the cover securely tied to the base of the washer assembly by means provided. A minimum one inch clearance shall be provided between the washer assembly and the top, sides and ends of the crate. Contents shall be anchored in accordance with the appendix of MIL-C-104.

5.2.1.2.2 Tumbler assembly. Each tumbler assembly, preserved and packaged as specified in 5.1, shall be packed as specified in 5.2.1.2.1.

5.2.2 Level B.

5.2.2.1 Type I unit. Type I laundry units, preserved and packaged as specified in 5.1, shall have all openings into electric motors that will permit entry of liquid water, dirt, or dust sealed with a contrasting color tape. All gauges, meters, instruction dials, sight glasses, and access door glass shall be covered with single-faced corrugated fiberboard or other cushioning material secured with commercial tape. The canvas cover for the laundry unit shall be placed in a heat sealed waterproof bag or wrapped in waterproof barrier material conforming to PPP-B-1055, prior to being packaged in a fiberboard box specified in 5.1.1.7.1.3. All seams of the wrap shall be sealed with a 3/4 inch minimum width continuous seam of water-resistance adhesive conforming to MIL-A-260. The canvas cover shall then be packaged in a fiberboard box specified in 5.1.1.7.1.3, and secured to the laundry unit with at least two lengthwise and two girthwise straps, minimum 3/8 by 0.020 inch conforming to type I, class A or B or QQ-S-781.

5.2.2.2 Type II unit.

5.2.2.2.1 Washer assembly. Each washer assembly, preserved and packaged as specified in 5.1, shall be packed in an open crate conforming to type V,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

style B of PPP-C-650. Prior to packing, the washer assembly shall be covered with the cover provided and the cover securely tied to the base of the washer assembly by means provided. A minimum one inch clearance shall be provided between the washer assembly and the top, sides and ends of the crate. Contents shall be anchored in accordance with the appendix of PPP-C-650.

5.2.2.2.2 Tumbler assembly. Each tumbler assembly, preserved and packaged as specified in 5.1, shall be packed as specified in 5.2.2.2.1.

5.2.3 Level C. Laundry units, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at lowest transportation rate for such supplies. Shipments shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Type I unit. In addition to the caution and deprocessing marking specified herein, interior packages and the laundry unit shall be marked in accordance with MIL-STD-129. Special requirements applicable to unpacked vehicles shall apply for level B and C packs.

5.3.1.1 Humping precautions. A large sign containing the words "DO NOT HUMP" shall be secured in a conspicuous place on each side of railroad cars used to ship laundry units.

5.3.2 Type II units. In addition to the caution and deprocessing marking specified herein, shipping containers shall be marked in accordance with MIL-STD-129. Set marking requirements specified therein shall apply.

6. NOTES

6.1 Intended use.

6.1.1 Trailer mounted, type I. The trailer mounted type I laundry covered by this specification is a complete mobile unit for use in the field by personnel of the Armed Forces to provide laundry service to troop units and hospitals. The unit is designed to take water from streams, rivers, lakes and the like by means of suction and to heat it sufficiently for laundering purposes. The unit has a secondary function of decontaminating personal clothing from chemical warfare and bacteriological warfare agents and radioactive materials.

6.1.2 Skid mounted - type II. The skid mounted type II field laundry unit covered by this specification is a complete mobile unit for use in the field

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

by Military personnel to provide laundry service for troop units and hospitals. The unit is designed to take water from streams, rivers, lakes and the like by means of a suction pump for laundering purposes without heating the water. The unit has a secondary function of decontaminating personnel clothing from chemical warfare and bacteriological warfare agents and radio-active materials.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type required (see 1.2).
(c) When a first article is required (see 3.1, 4.3, and 6.5).
(d) When Marine Corps Green No. 23 enamel is required (see 3.4.12.1).
(e) When cotton duck, webbing, chassis assembly, engine-generator canvas cover, and ground rod is to be furnished by the supplier (see 3.4.17).
(f) Source of delivery and how Government furnished property is to be obtained, when applicable (see 3.4.17).
(g) When moisture and fungus-resistant treatment is not required (see 3.6.12).
(h) When electromagnetic compatibility is required (see 3.6.13 and 4.5.6).
(i) When procurement is for Marine Corps (see 3.6.15.2 and 3.6.15.6).
(j) When a nameplate is required for type I trailer (see 3.6.15.3).
(k) Type I - 500 mi. road test location (see 4.5.5).
(l) Selection of applicable level of packaging and packing (see 5.1 and 5.2).

6.2.1 Contract data requirements. Any data items to be delivered under any contract for items covered by this specification should be specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

6.3 For access to a standard shade sample of thread, address the procuring office issuing the invitation for bids.

6.3.1 Color chips for Marine Corps Green No. 23 may be obtained from Commandant of the Marine Corps (CSY-10) Headquarters, U.S. Marine Corps, Washington, DC 20380.

6.4 Motors manufactured by H. K. Porter Co., Inc., Peerless Electric Division, 1524 West Market St., Warren, OH, under model number P11800

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

for the washer motor and model number P11801 for the extractor motor were tested and found at the time of the test to meet the requirements of 3.4.16.

* 6.5 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Armed Services Procurement Regulations ASPR 7-104.55. The first article should be a preproduction sample, initial production item, or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.6 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.7 Supersession data. This specification includes the requirements of Interim Purchase Description IP/DES-S-62-7 dated 8 December 1967.

Custodians:

Army - GL
Navy - YD
Air Force - 84

Preparing activity:

Army - GL

Project No. 3510-0233

Review activities:

Army - MD
Navy - MC
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

DRAWING NO.	DWG SIZE	DRAWING SUB-TITLE
6-E-1890	E	DRAWING LIST
1900	E	ASSEMBLY
1904	D	DRAIN PAN ASSEMBLY
1907	E	WATER HEATER ASSEMBLY
1908	D	PANEL, FUEL LINE BRKT (FOR RETAINER ASSYS, WATER HEATER
1909	E	SWITCH BOX ASSEMBLIES AND DETAILS
1910	E	DRYER, COMPAIR GENERATOR (RECEIVING TANK ASSY
1911	D	EXH DUCT ADAPTER AND RCVR TANK BRKT ASSYS (DETAILS
1912	E	ENGINE GENERATOR ASSEMBLY
1913	D	STEP ASSEMBLY
1916	D	DRAIN PIN AND CYLINDER STORAGE ASSEMBLY
1917	D	DRAIN PIN ASSEMBLY
1918	E	CYLINDER STORAGE CABINET ASSY
1919	E	CONTROL PANEL ASSEMBLY
1920	D	CONTROL BOX ASSEMBLY
1921	D	CONTROL BOX BODY ASSY AND DETAILS
1922	D	CONTROL BOX COVER DETAILS
1924	D	FORMULA CONTROL ASSEMBLY
1925	D	DRUM AND RECORD LOCK ASSEMBLIES
1926	E	CASE AND FLANGE HEAD ASSEMBLY AND DETAILS
1927	E	FORMULA CONTROL DETAILS
1928	D	COTTON AND WOOL FORMULA RECORD DETAILS
1929	E	WASHER EXTRACTOR ASSEMBLY
1930	E	WASHER EXTRACTOR FRAME ASSEMBLY
1931	D	SOAP CHUTE ASSEMBLY
1932	D	SOAP CHUTE COVER ASSEMBLY
1933	E	WASHER EXTRACTOR FRAME DETAILS
1934	E	WASHER EXTRACTOR FRONT HEAD SHEET ASSEMBLY
1935	E	WASHER EXTRACTOR DOOR ASSEMBLY
1943	E	DRIVE BASE AIR CYLINDER ASSEMBLY
1945	D	WASHER EXTRACTOR BASE ASSEMBLY
1946	D	WASHER EXTRACTOR SPRING BASE ASSEMBLIES
1947	D	DRAIN VALVE AND LEVER ASSEMBLY
1948	D	DRAIN VALVE HAND LEVER AND AIR CYL DUMP VALVE ASSYS
1949	D	DUMP VALVE AIR CYLINDER ASSEMBLY
1950	D	DRAIN VALVE ASSEMBLY
1951	E	DRAIN VALVE DETAILS
1952	D	DRAIN FLANGE DETAILS
1953	D	MAIN BEARING ASSEMBLY
1954	E	MAIN BEARING HOUSING DETAIL
1955	D	MAIN BEARING DETAILS
1956	D	MAIN DRIVE BRAKE ASSEMBLY
1957	D	MAIN DRIVE BRAKE CYLINDER ASSEMBLY
1958	D	OUTER BRAKE LEVER
1959	D	INNER BRAKE LEVER
1960	D	MAIN DRIVE BRAKE DETAILS
1961	D	WATER LEVEL CONTROL ASSEMBLY
1962	D	WATER CONTAINER ASSEMBLY
1963	D	WATER LEVEL SIGHT GAUGE ASSEMBLY
1964	E	WATER LEVEL AIR TUBE AND COVER ASSEMBLIES
1965	D	WATER LEVEL CONTROL SUPPORT ASSEMBLY
1966	E	WASHER EXTRACTOR CYLINDER ASSEMBLY
1967	E	WASHER EXTRACTOR CYLINDER DETAILS
1968	D	WASHER EXTRACTOR FRONT SPRING BRACKET ASSY
1969	D	WASHER EXTRACTOR REAR SPRING BRACKET ASSYS
1970	D	DRAIN DUMP LEVER GUIDE ASSEMBLY
1971	D	FRONT TIE DOWN BAR ASSEMBLY
1974	D	MAIN DRIVE BELT GUARD ASSEMBLY
1976	E	UPPER BELT GUARD DETAILS
1977	D	MAIN DRIVE SHEAVE
1978	D	DUCT RTNR, MAN BRK HOSE ASS'Y, AIR LINE (FROM EXTRACTOR UNIT TO DOOR) ASSYS
1979	D	MISCELLANEOUS WASHER EXTRACTOR DETAILS
1980	D	NOSE GUARD ASSEMBLY
1981	E	WASHER EXTRACTOR SUPPORT ASSEMBLIES
1982	D	AIR LINES ARRANGEMENT
1983	E	CONTROL PANEL WIRING DIAGRAMS
2047	E	PLATFORM MOUNTING HOLE LOCATIONS
2107	E	DRAIN HOSE ASSY AND CONTROL BOX DETAILS
2108	C	CHARACTERISTIC CURVES OF EXTRACTOR MOTOR
2109	C	CHARACTERISTIC CURVES OF WASHER MOTOR
2236	D	TUMBLER HUB CAMSA BRKT, STRUT ASSYS (MISC DETAILS
2301	D	TUMBLER BURNER FUEL LINES ASSEMBLY
2305	D	TUMBLER HEATER (GENERATOR EXH HOSE ASSEMBLIES

DRAWING NO.	DWG SIZE	DRAWING SUB-TITLE
6-E-2304	E	TUMBLER ASSEMBLY
2305	D	TUMBLER SPEED REDUCER DETAILS
2306	D	TUMBLER SPEED REDUCER DETAILS
2307	D	TUMBLER BARREL SPIDER ASSEMBLY
2308	D	TUMBLER DISCHARGE SPOUT AND RETAINER PIN ASSYS
2309	E	TUMBLER BASE PL ASSYS, FRONT (REAR AND DETAILS
2310	E	TUMBLER DETAILS
2311	E	TUMBLER BARREL DETAILS
2312	D	TUMBLER SPROCKET ASSEMBLY
2313	D	TUMBLER TRUNNION DETAILS
2314	D	TUMBLER TRUNNION SHAFT BEARING HOUSING
2315	D	TUMBLER TRUNNION ASSEMBLY
2316	D	TUMBLER SPEED REDUCER HOUSING
2317	E	TUMBLER MOUNTING BRACKET ASSEMBLY
2318	D	TUMBLER MOTOR BASE ASSEMBLY
2319	D	TUMBLER BASE ASSEMBLY
2320	D	TUMBLER WORM HOUSING SUPPORT ASSEMBLY
2321	D	TUMBLER DOOR HANDLE AND SCREW DETAILS
2322	D	TUMBLER EXHAUST BLOWER ASSEMBLY
2323	D	TUMBLER FRONT SHELL RING, INNER (2008 WHEEL BRACKET ASSYS
2324	D	TUMBLER FRONT SHELL ASSEMBLY AND DETAILS
2325	E	TUMBLER DETAILS
2326	E	TUMBLER SHELL ASSEMBLY
2327	D	TUMBLER EXHAUST BLOWER DETAILS
2328	D	TUMBLER BASE ASSEMBLY
2329	E	TUMBLER CYLINDER ASSEMBLY
2330	E	TUMBLER SPEED REDUCER ASSEMBLY
2331	D	TUMBLER COVER BRACKET ASSEMBLY
2332	D	TUMBLER BARREL ASSEMBLY AND DETAILS
2333	D	TUMBLER BARREL DRUM CYLINDER ASSEMBLY
2334	D	TUMBLER DOOR ASSEMBLY
2335	D	TUMBLER MOTOR MOUNT ASSEMBLY
2336	D	TUMBLER BELT GUARD ASSEMBLY
2337	E	TUMBLER ELECTRICAL COMPONENT ASSEMBLY
2338	D	TUMBLER MOUNTING PANEL ASSY AND WIRING DIAGRAM
2339	D	TUMBLER AIR HEATER ASSEMBLY
2340	D	TUMBLER AIR HEATER DETAILS
2341	D	TUMBLER AIR HEATER RETURN BOX ASSY, NO. 4
2342	D	TUMBLER AIR HEATER BOX COVER ASSY, NO. 3
2343	D	TUMBLER AIR HEATER RETURN BOX ASSY, NO. 2
2344	D	TUMBLER AIR HEATER PLATE ASSEMBLY
2345	D	TUMBLER AIR HEATER PLATE DETAILS
2346	D	TUMBLER AIR HEATER RETURN BOX ASSY, NO. 3
2347	D	TUMBLER AIR HEATER RETURN BOX DETAILS, NO. 1
2348	D	TUMBLER AIR HEATER RETURN BOX ASSY, NO. 1
2349	D	TUMBLER AIR HEATER SCREEN ASSEMBLY
2350	D	TUMBLER AIR HEATER REAR FRAME COVERS AND PLATE
2351	D	TUMBLER AIR HEATER FRONT FRAME AND COVER
2352	D	TUMBLER AIR HEATER RETURN BOX ASSY, NO. 2
2353	D	TUMBLER AIR HEATER RETURN BOX DETAILS, NO. 1
2354	D	TUMBLER AIR HEATER BOX COVER ASSYS, NO. 2 AND NO. 4
2355	D	TUMBLER AIR HEATER OUTLET COVER ASSEMBLY
2356	D	TUMBLER AIR HEATER BURNER MOUNTING DETAILS
2357	D	TUMBLER AIR HEATER BURNER MOUNTING ASSEMBLY
2358	E	TUMBLER AIR HEATER MOUNTING PLATE ASSEMBLY
2359	D	TUMBLER AIR HEATER OUTER COVER AND LINER SHEET
2360	D	TUMBLER AIR HEATER INNER COVER DETAIL
2361	D	TUMBLER AIR HEATER HOOD ASSEMBLY
2362	D	TUMBLER AIR HEATER HOOD FRAME ASSEMBLY
2363	E	TUMBLER BURNER ASSEMBLY
2364	D	TUMBLER BURNER AIR SHUTTER ASSEMBLY
2365	D	TUMBLER BURNER ELECTRODE AND NOZZLE ASSY
2366	E	TUMBLER BURNER AIR PLENUM GSKT AND SML SHUT DET
2367	D	TUMBLER BURNER TRANSFORMER BRACKET ASSY
2368	D	TUMBLER BURNER ELECTRODE CBLE (RELAY SHUT DETAILS
2369	D	TUMBLER BURNER ELECTRODE AND NOZ BASE DETAILS
2370	D	TUMBLER BURNER AIR NOZZLE
2371	D	TUMBLER BLOWER ASSEMBLY
2372	D	TUMBLER BLOWER HOUSING (MACHINING DETAIL S)
2373	D	TUMBLER BLOWER HOUSING (CASTING DETAILS)
2374	D	TUMBLER BLOWER MTG PLATE
2375	D	TUMBLER BLOWER AIR INTAKE HOUSING
2376	D	TUMBLER BLOWER SHUTTER ASSEMBLY AND DETAILS
2377	D	ELECTRICAL DISTRIBUTION SYSTEM SCHEMATIC
2378	D	GREASE BLOCK ASSY (MAIN DRIVE DETAILS

DRAWING NO.	DWG SIZE	DRAWING SUB-TITLE
6-E-6973	D	DIAPHRAM VALVE ASSEMBLY
6916	D	TOOL BOX ASSEMBLY
6918	D	TOOL BOX BASE ASSEMBLY
6961	E	MAIN DRIVE ASSEMBLY
6962	D	MAIN DRIVE BASE ASSEMBLY
6963	E	MAIN DRIVE BASE DETAILS
6964	D	MOTOR BASE ASSEMBLY
6965	D	MOTOR HOLD DOWN CLAMP ASSEMBLY
6966	D	NO 1 JACKSHAFT BELT GUARD ASSEMBLY
6967	D	NO 2 JACKSHAFT BELT GUARD ASSEMBLY
6968	D	GREASE LINE ASSEMBLIES, FOR PILLOW BLOCKS
6969	D	MAIN DRIVE GUARD DETAILS
6-1-795	D	BATH UNIT 8-SHOWERHEAD M-1966 1 WATER HTR ASSY
784	B	WATER VESSEL ASSEMBLY
785	B	OUTSIDE VESSEL FRONT SECTION AND BLOWER DUCT
786	D	FIRE BOX
787	D	BLOWER ASSEMBLY
788	D	BLOWER DETAILS
789	D	WATER HEATER DETAILS
790	D	BURNER HEAD ASSEMBLY
791	D	WATER PUMP ASSEMBLY
792	D	SWITCH BOX WATER PUMP
793	D	MISCELLANEOUS COMPONENTS
794	D	SHUTTER ASSEMBLY
795	D	IGNITION CABLE ASSEMBLY

FORT BELVOIR DRAWINGS CODE IDENT 97403

DRAWING NO.	DWG SIZE	DRAWING SUB-TITLE
6-1-2090	D	HEATER, DUCT TYPE, NAT. GAS 150 BTU/H, 18 INCH FLEX DUCT ASSY
2091	D	18 INCH DUCT BODY ASSEMBLY AND DETAILS
2092	D	18 INCH DUCT EXPANDING BAND CORD AND PIN ASSY
2093	D	18 INCH DUCT EXPANDING BAND DETAILS
8084	B	18 INCH DUCT EXPANDING BAND DETAILS


U. S. ARMY NATICK LABORATORIES

LAUNDRY, TRAILER MOUNTED, SINGLE TRAILER TYPE, M-532;

DRAWING LIST

SIZE E | SCALE NONE | 6-E-1892

Source: https://assist.dla.mil -- Downloaded: 20260-21T19:28Z
Check the source to verify that this is the current version before use.

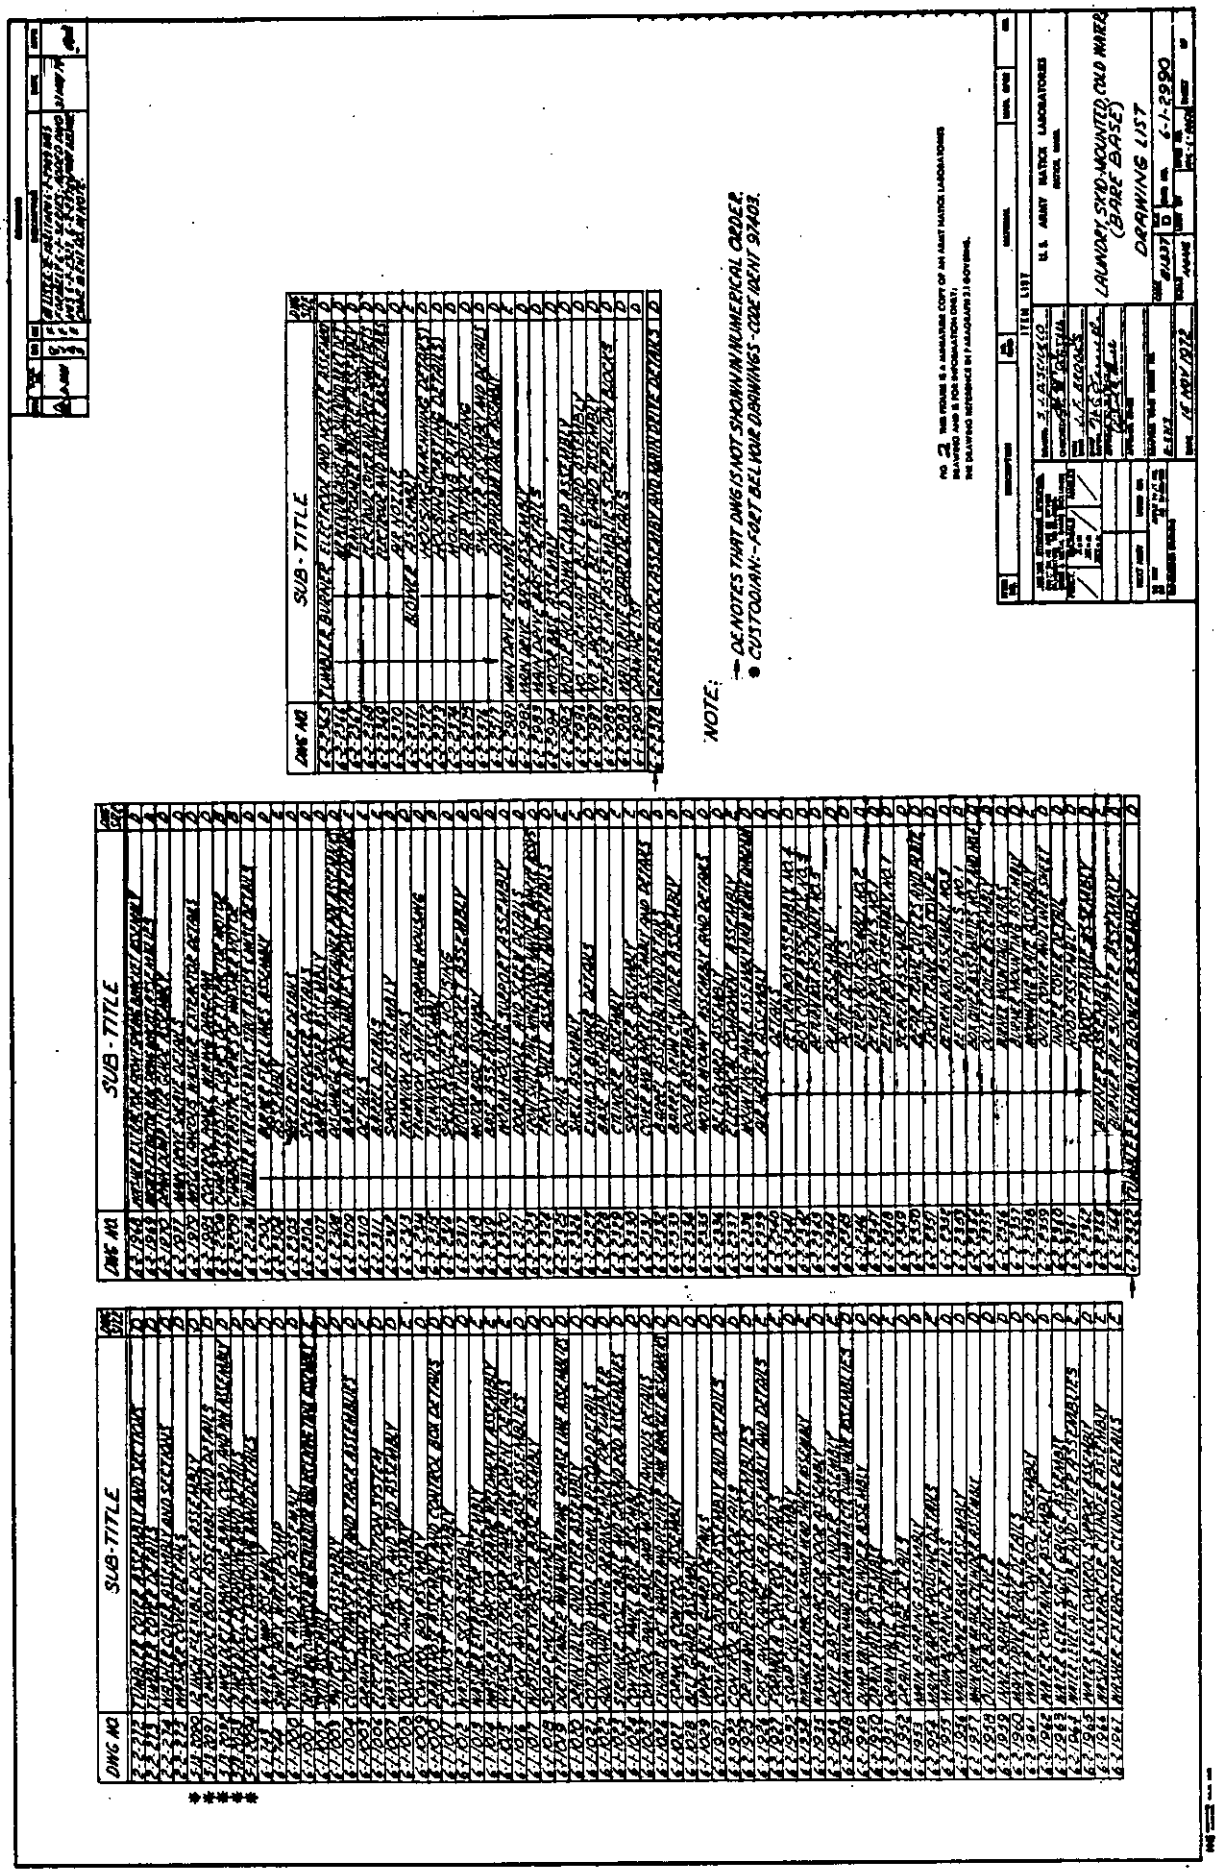

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:28Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FOR..., CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-21T19:28Z
Check the source to verify that this is the current version before use.