MILITARY SPECIFICATION

RACK, MAILBAG, FOLDING TYPE, METAL, 6-BAG CAPACITY

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers one type and size of a folding, six bag capacity, metal mailbag rack.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ–I–666	— Iron Castings, Malleable
QQ–S–698	— Steel, Sheet and Strip, Low Carbon
QQ–S–781	— Steel Strapping, Flat
QQ–T–830	— Tube, Steel, (Carbon, Mechanical; Seamless and Welded)
QQ–Z–325	— Zinc Plating (Electro-Deposited)
PPP–B–636	— Box, Fiberboard
PPP–T–60	— Tape; Pressure- Sensitive Adhesive, Waterproof, for Packaging and Sealing.

MILITARY

MIL–C–132	— Crates, Open, Wood; Maximum Capacity, 2500 Pounds
MIL–Z–17871	— Zinc-Coating (Hot-Dip Galvanizing)

STANDARDS

MILITARY

MIL–STD–105	— Sampling Procedures and Tables for Inspection by Attributes.
MIL–STD–129	— Marking for Shipment and Storage.
MIL–STD–130	— Identification Marking of U. S. Military Property

DRAWING

QUARTERMASTER CORPS

5–13–654	— Rack, Bag, Mail, Folding-Type, Metal, 6-Bag Capacity.

(Miniature copy of Drawing 5–13–654, identified as figure 1, is attached for information purposes only).

(Copies of specifications, standards, and drawing required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 **Preproduction sample.** When specified (see 6.2), before production is commenced, a sample of the assembled mailbag rack shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2 to determine compliance with this specification. The approval of the preproduction sample authorizes the commencement of production,

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production mailbag racks.

3.2 **Materials.** Materials shall conform to the applicable specifications and requirements specified hereinafter. Materials not specified shall be the best quality normally used in commercial practice.

3.2.1 *Steel sheet and strip.* Steel sheet shall be cold rolled or hot rolled, commercial quality, and steel strip shall be hot rolled, commercial quality or cold rolled, dead soft, No. 5 temper conforming to Specification QQ–S–698. Steel sheet and strip shall range from SAE 1009 to 1015.

3.2.2 *Tubing, steel.* Steel tubing shall be round, MT–1010–1015, any type or condition as specified in Specification QQ–T–830.

3.2.3 *Casting, malleable iron.* Malleable iron castings shall conform to grade I of Specification QQ–I–666.

3.3 **Construction.** The construction of the mailbag rack shall be in accordance with Drawing 5–13–654 and as specified herein.

3.3.1 *Welding.* All welding shall be as specified on Drawing 5–13–654. Work to be welded shall be clean and free of oxide, scale, paint, grease or other foreign matter. Welds shall be sound, smooth and free from porosity, cracks, and incomplete fusion. The welded parts shall be free of deformation.

3.3.2 *Riveting.* Rivets shall be neatly and securely set so as to permit the legs to hinge freely without being excessively loose.

3.3.3 *Plates; foot, gussets and ears.* The foot plates, gussets and ears shall be made of sheet or strip steel specified in 3.2.1.

3.3.4 *Frame, top and legs.* The top frame, leg sockets and legs shall be made of steel tubing specified in 3.2.2.

3.3.5 *Hooks.* Mailbag hooks shall be cast of malleable iron specified in 3.2.3.

3.3.6 *Rivets.* Rivets shall be solid steel, commercial, ¼ inch round head, 1½ inches long

3.4 **Finish.** All parts of the assembled rack shall be given either a hot-dip galvanized finish or an electro-plate galvanized finish, at the option of the contractor. The hot-dip method shall conform to Specification MIL–Z–17871, except that thickness of coating shall be not less than 0.0005 inch. The electro-plating method shall conform to type 1, class 2, of Specification QQ–Z–325.

3.5 **Marking.** The marking for identification shall be in accordance with Standard MIL–STD–130 and Drawing 5–13–654. The legend for identification shall be stamped on a corrosion resisting metal tag and the tag permanently attached to a leg of the rack. The marking shall include the following:

1. The letters "U. S." (½ inch high characters).
2. Manufacturer's identification.
3. Stock number.

The latter two markings shall have characters ¼ inch high.

3.6 **Workmanship.** The finished mailbag rack shall be clean, well made and free from any defect which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies conform to prescribed requirements.

4.2 **Preproduction sample inspection.** When a preproduction sample is required, the preproduction sample shall be examined in accordance with the classification of defects in 4.3.1.2 and specified dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in Standard MIL–STD–105, except where otherwise indicated. For sampling purposes, a lot size shall consist of all racks offered for delivery at one time.

4.3.1 *Component and material inspection.* In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification.

4.3.1.1 *End item inspection.*

4.3.1.2 *Visual examination.* Examination of the end item shall be in accordance with the classification of defects and acceptable quality levels (AQL's) set forth below. The lot size shall be expressed in units of racks for the purpose of determining the sample size in accordance with Standard MIL–STD–105. The sample unit for this examination shall be one (1) completely fabricated rack.

Examine	Defect	Classification	
		Major	Minor
Finish (assembly)	Not galvanized as specified	X	
	Not smooth continuous coating		X
	Not tightly adherent (flaking, etc.)		X
	Porous, pitted or corroded area		X
	Uncoated areas (base metal shows)	X	
	Blisters, lumps, dross or drips		X
	Evidence of peeling or flash spots		X
	Foreign material imbedded in finish		X
Construction and workmanship	Departure from design requirements affecting serviceability	X	
	Departure from design requirements not affecting serviceability		X
	Part missing, broken, fractured, or cracked	X	
	Any part warped or bent out of shape affecting serviceability	X	
	Any part warped or bent out of shape not affecting serviceability		X
	Any part misaligned, mispositioned, or in wrong location, affecting serviceability.	X	
	Any part misaligned, mispositioned, or in wrong location, not affecting serviceability.		X
	Sharp edge or projection that may cause injury	X	
(Welding)	Weld missing, completely fractured, not fused	X	
	Crack or partial fracture	X	
	Incomplete or discontinuous	X	
	Bubbles, porosity, granular surface		X
	Burn holes or pits	X	
	Excess flux and splatter not removed		X
(Rivets)	Not securely peened	X	
	Broken, twisted or otherwise malformed		X
	Missing, insufficient number used, not located as specified	X	
Identification marking	Missing, not permanent, illegible, incomplete, incorrect or mispositioned	X	

4.3.1.3 *Dimensional examination.* Inspection shall be made of racks for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect.

4.3.1.4 *Inspection levels and AQL's.* The acceptable quality levels (AQL's), expressed in defects per hundred units, and inspection levels (for sample size), shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:28Z
Check the source to verify that this is the currentversion before use.

	Inspection levels	AQL's Major	AQL's Total
For examination in 4.3.1.2...	II	2.5	6.5
For examination in 4.3.1.3 (1 class)	L–4	..	4.0

4.3.2 *Testing of end item.* Testing shall be performed on three (3) sample units selected from each inspection lot for thickness of galvanized finish, as specified in 3.4, with no evidence of failure.

4.3.3 *Examination of preparation for delivery.* An examination will be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects will be scored as set forth below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be L–4 and the acceptable quality level shall be 4.0 defects per hundred units.

Examine	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damage or otherwise defective.
Workmanship ..	Inadequate application of components such as loose strapping, end protector not positioned properly or folded legs not properly secured to top frame.
Contents	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 **Packaging.** Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Each rack shall be folded to its collapsed position. Eight of the sixteen mailbag hooks on each side shall be immobilized by suitable means adjacent to the leg sockets at each corner. The folded legs shall be secured to the top frame by means of tape, cord, or twine. End protectors, made in accordance with class 2, V3c or V3s of Specification PPP–B–636, shall be positioned over each end of the rack. The protector shall be in the form of a half-slotted, style FOL box. The end protectors shall be snug-fitting and shall have a minimum depth of 12 inches. Closure of the bottom of each end protector shall be effected by having all seams and corners taped with 2-inch minimum width tape conforming to type III, class 1 of Specification PPP–T–60. Tape shall extend over all corners and edges of the box a minimum of 2 inches. Each protector shall be held in place with one strap, 3/8 inch by 0.020 inch, type I, class B of Specification QQ–S–781. The strap shall be placed approximately 2 inches from the open end of the protector.

5.1.2 *Level C.* The racks shall be packaged in accordance with industry's practice.

5.2 **Packing.** Packing shall be level A or C as specified (see 6.2).

5.2.1 *Level A.* Two racks, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style C of Specification MIL–C–132.

5.2.2 *Level C.* The racks, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.** In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Standard MIL–STD–129.

6. NOTES

6.1 **Intended use.** The six bag capacity mailbag rack covered by this specification is intended for use by the Armed Forces Postal services.

6.2 **Ordering data.** Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) When preproduction sample is required (see 3.1).

(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—GL
Navy—S&A
Air Force—MOA

Preparing activity:
Army—GL
Project No. 7110–0055

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.

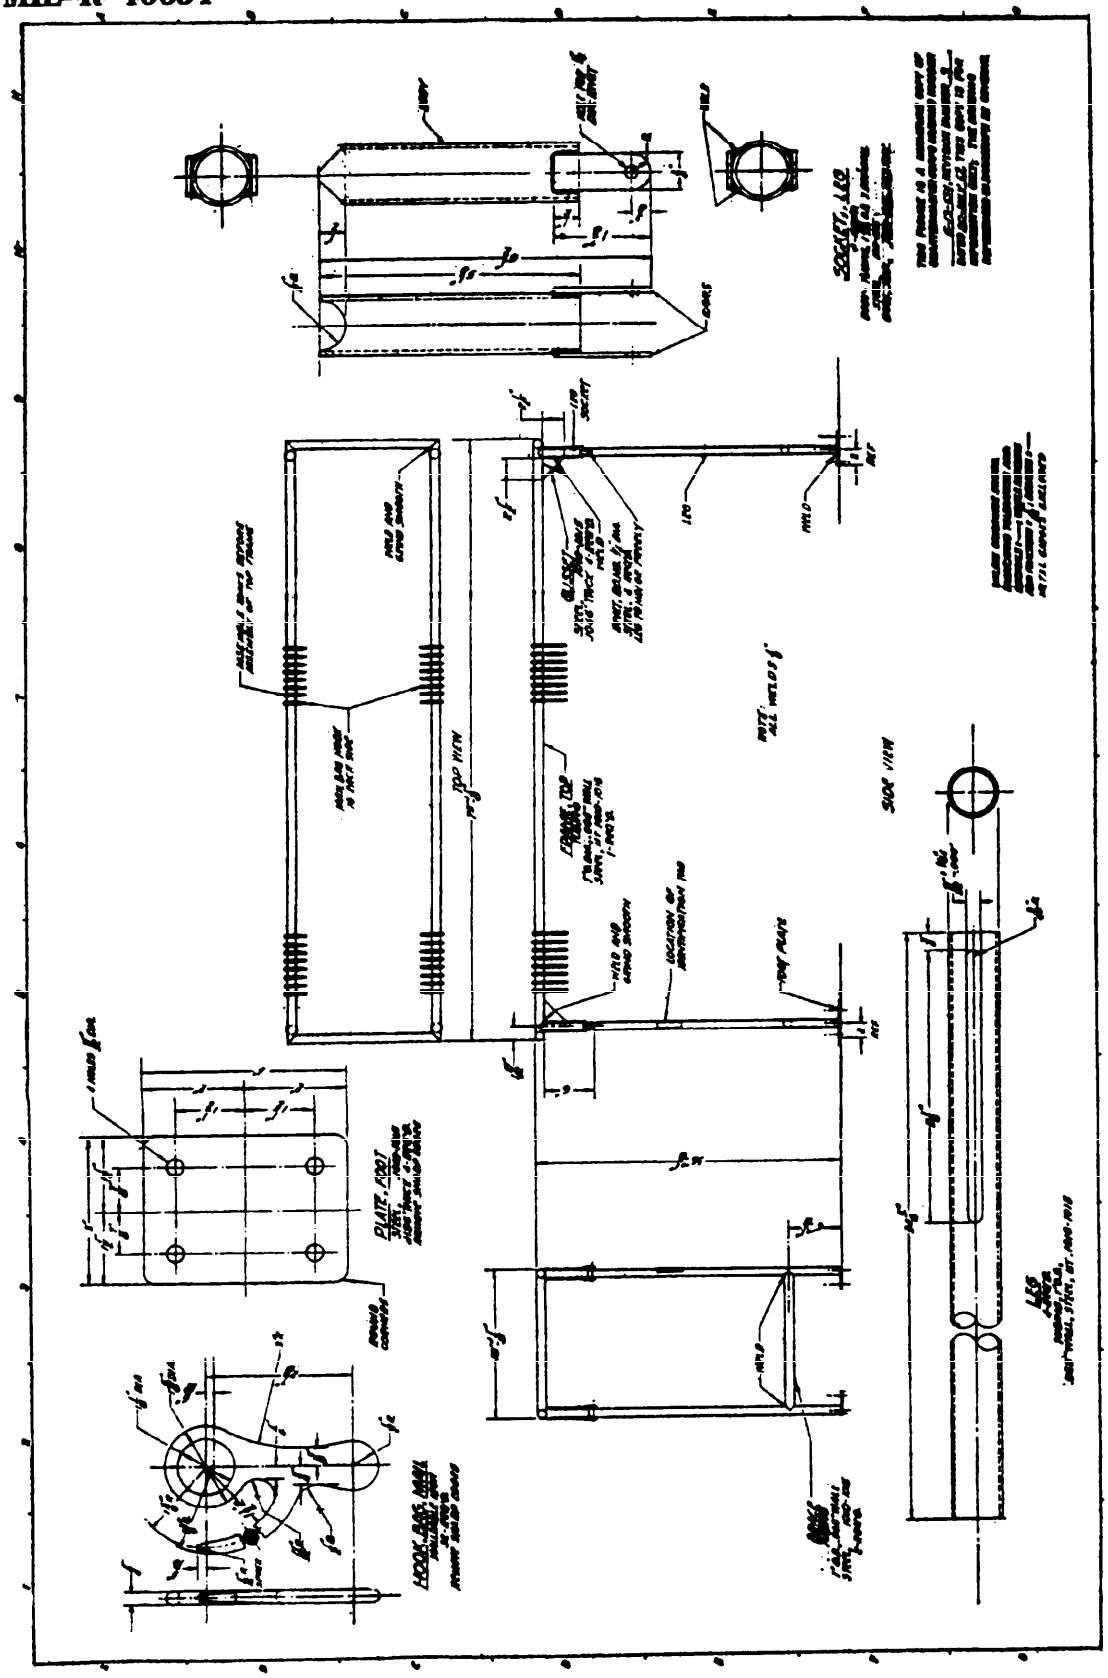


FIGURE 1. *Rack, bag, mail, folding type, metal, 6-bag capacity.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:28Z
Check the source to verify that this is the current version before use.