MIL-T-40624B

31 January 1969

SUPERSEDING
MIL-C-40624A
9 March 1967

MILITARY SPECIFICATION

TARPAULIN, LAUNDRY, TRAILER MOUNTED, SINGLE TRAILER TYPE, M-532

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification provides requirements for a cotton duck cloth tarpaulin for the Single Trailer Mounted Laundry Unit, M-532.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

T-T-871	-	Twine, Cotton, Wrapping.
T-T-911	-	Twine, Jute.
V-T-285	-	Thread, Polyester.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered.
CCC-C-428	-	Cloth, Duck, Cotton, Fire Water, Weather, and Mildew Resistant.
CCC-C-429	-	Cloth, Osnaburg, Cotton.
CCC-C-467	-	Cloth, Burlap, Jute (or Kenaf).
DDD-L-20	-	Label; for Clothing, Equipage and Tentage, (General Use).

MILITARY

MIL-R-1670	-	Rope, Tent-Lay.
MIL-G-16491	-	Grommet, Metallic.
MIL-T-40625	-	Tubing, Bias Sewn (Burlap or Osnaburg) Cloth.

FSC 3510

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

DRAWINGS

ARMY NATICK LABORATORIES

5-4-1094 - Tarpaulin, Laundry, Trailer Mounted, Single Trailer Type, M-532; Assembly and Details.
5-4-1095 - Tarpaulin, Laundry, Trailer Mounted, Single Trailer Type, M-532; Details and Sections.
5-4-1096 - Tarpaulin, Laundry, Trailer Mounted, Single Trailer Type, M-532; Reinforcement Details.

(Figures 1, 2, and 3 are miniature reproductions of Drawing Nos. 5-4-1094, 5-4-1095, 5-4-1096 and are attached for information only.)

PUBLICATIONS

Department of the Army Technical Manual TM 10-269
General Repair for Canvas and Webbing.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the tarpaulin covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials and components.-

3.2.1 Cloth, duck, cotton.- The cotton duck shall conform to type I, no. 6, hard texture of CCC-C-419.

3.2.1.1 Color and treatment.- The finished cloth shall conform to type I, class 1 of CCC-C-428.

3.2.2 Thread polyester.- The thread shall conform to type I, class 1, sub-class B, shade S-1 (Cable no. 66022) of V-T-285. The dyed thread shall show color fastness to weathering equal to or better than the standard shade sample (see 6.3). When no standard shade sample is available, the dyed thread shall show good color fastness to weathering. Thread sizes shall be as follows:

For all stitching except stitching indicated by "Z" on drawings	Size FF for needle and bobbin
For stitching indicated by "Z" on drawings	Size FF for needle, size F for looper

* 3.2.3 Rope, tie.- The rope used for the tie lines shall conform to type I, class 2, 5/16 diameter, of MIL-R-1670.

3.2.4 Grommets, metallic.- The grommets shall conform to type III, class 3, size No. 4 of MIL-G-16491.

* 3.2.5 Clamp, rope.- The rope clamp shall be brass, conforming to Astrup Co., No. 468, or equal.

3.3 Construction.- The construction shall conform to the drawings listed in section 2 and as specified herein.

3.3.1 Stitching, machine.- Stitch types shall conform to Fed. Std. No. 751 as follows:

For all stitching except stitching indicated by "Z" on drawings	Type 301, 5 to 7 stitches per inch
For stitching indicated by "Z" on drawings	Type 401, 5 to 7 stitches per inch. Chain portion of stitching shall not appear on outside of tarpaulin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

* 3.3.1.2 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1-inch at each break on stitch type 301, and not less than 1-1/2 inches on stitch type 401. Thread breaks in type 401 stitching may be overstitched with stitch type 301.

* 3.3.1.3 Stitching ends, type 301.- Stitching at the ends shall be overstitched not less than 1-inch except where ends are turned under in a hem, or are held down by other stitching. Where stitching is performed automatically on stitch patterns such as box, box with cross-stitch, "W" stitching or straight line tacking, at least three or more tying, overlapping or backstitches shall be used to secure the ends.

* 3.3.1.4 Skipped stitches.- Two or more skipped stitches occurring consecutively in stitch type 301 shall be overstitched not less than 1-inch. Any skipped stitch in stitch type 401 shall be overstitched not less than 1-1/2 inches. Skipped stitches in type 401 stitching may be overstitched with stitch type 301.

3.3.1.5 The addition of any lubricant to the polyester thread prior to or during the sewing operation is prohibited.

3.3.2 Setting of grommets.- Holes punched to receive the grommets shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be securely clinched without cutting the material.

* 3.3.3 Splicing of panels.- Splicing of body panels shall be permitted. One splice per panel shall be allowed but splices in adjoining panels shall not be located adjacent to each other. No spliced piece shall be less than one yard in length.

3.3.4 Repairs.- Repairs, whenever necessary and when authorized by the contracting officer, shall be effected in accordance with the Department of the Army Technical Manual TM-10-269 except that hand-sewn or glued patches will not be permitted.

3.4 Marking.- All marking shall conform to DDD-L-20.

* 3.4.1 Special marking.- The words REAR and FRONT, and the letters US shall conform to type IV, class 9 in the size characters and in the locations shown on Drawing 5-4-1095. Class 9 markings shall be clearly legible after subjection to accelerated weathering.

* 3.4.2 Identification marking.- The identification marking shall conform to type IV, class 8 in the location shown on Drawing 5-4-1095.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

* 3.5 Workmanship.- Cloth components shall be free of holes, cuts, tears or cloth defects such as multiple floats or broken or missing yarns. Rope components shall be free of cuts or breaks. Thread tension shall be maintained so that there shall be no loose stitching and seam allowances shall be maintained with seams properly sewed so that no runoffs, twists, pleats, or open seams shall result. Care shall be taken to insure that no needle chews occur. All thread ends shall be trimmed to 1/2-inch or less. Metal components shall be free of burrs, sharp edges or corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects listed in tables I and II.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2 Process inspection.- Inspection shall be made to determine that the following are as specified:

(a) There shall be no lubrication of polyester thread prior to or during sewing operations for compliance with 3.3.1.5.

(b) Holes punched to receive grommets are in accordance with 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

Whenever nonconformance is noted, correction shall be made to the item affected and to the process.

4.3.3 End product.- The lot shall consist of all completely fabricated tarpaulins offered for inspection at one time. The sample unit shall be one completely fabricated tarpaulin. The inspection levels and the acceptable quality levels (AQL's) shall be as specified in 4.3.3.3.

* 4.3.3.1 Visual examination.- The completely fabricated tarpaulin shall be examined for defects in table I.

TABLE I.- Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor
Fabric	Cut, tear or hole:		
	- Greater than 1/4-inch in length or diameter	X	
	- Greater than 1/8-inch but not greater than 1/4-inch in length or diameter		X
	- More than 5 holes 1/8-inch or less in length or diameter		X
	Broken or missing yarn, multiple floats clearly visible at normal inspection distance (approx. 3-feet)		X
Splicing	More than 1 splice per body panel; any two adjacent panels spliced at same location		X
	Spliced piece less than 1 yard in length	X	
Grommets	Improperly set; two or more teeth exposed; clinched loosely, allowing grommet to rotate in hole.		X
	Clinched excessively tight, cutting fabric, or insecurely clinched; i.e., grommet or washer may become disengaged	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor
Rope components	Cut or break	X	
	Eye splice not as specified; free end not finished as specified		X
Seams and stitching	Open seam on stitch type 301:		
	- For more than 1/4-inch cut not more than 1-inch		X
	- For more than 1-inch	X	
	Open seam on stitch type 401:		
	- One row of stitching open for 1-inch or less		X
	- One row of stitching open for more than 1-inch	X	
	- Both rows of stitching open (not necessarily at same location)	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when one or more skipped or run-off stitches occur. On double-stitched seams, a seam shall be classified as open when either one or both sides of a seam are open.		
	Raw edges caught in stitching:		
	- More than 1-inch but not more than 3-inches		X
	- More than 3-inches	X	
	NOTE: Raw edges not caught in stitching shall be classified as open seams.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Classification Minor
Seams and stitching (cont'd)	Thread breaks:		
	- Overstitched less than 1-inch on stitch type 301; less than 1-1/2 inches on stitch type 401		X
	NOTE: Thread breaks not overstitched shall be classified as open seams.		
	Skipped stitches:		
	- Overstitched less than 1-1/2 inches on stitch type 401		X
	- Overstitched less than 1-inch on stitch type 301 (when 2 or more skipped stitches occur consecutively)		X
	NOTE: Skipped stitches not overstitched shall be classified as open seams.		
	Needle chews resulting in cut or tear larger than 1/4-inch in length, or hole larger than 1/4-inch in diameter	X	
	One or more required rows of stitching omitted	X	
Seam type	Wrong seam type	X	
Stitch type	Wrong stitch type	X	
Stitch tension	Loose, resulting in a loosely exposed top or bottom (bobbin or looper) thread for more than 6 inches		X
	Tight as evidenced by puckering of seam for more than 6 inches		X
Stitches per inch	One stitch less than minimum specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Classification Minor
Seams and stitching (cont'd)	Two or more stitches less than minimum specified	X	
Stitches per inch (cont'd)	One or more stitches in excess of maximum specified		X
NOTE:	Variation in the number of stitches per inch, caused by the operator's speeding up the machine and pulling the fabric in order to sew over heavy seams or heavy places or in turning corners shall be classified as follows: a. Within the major defect classification - minor defect b. Within the minor defect classification - no defect		
Stitching gage	Not as specified		X
Stitching ends	Overstitched less than 1 inch on stitch type 301 (except where ends are held down by other stitching, turned under in a hem or when stitching is performed automatically).		X
	Secured with less than 3 tying overlapping or backstitches when automatic stitching is performed		X
Stitching indicated by "Z" on drawings	Chain portion of stitching is on outside of tarpaulin		X
	One or more required rows of stitching omitted	X	
	Seams pleated or puckered		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Classification Minor
Mends, darns or patches	Not authorized by the contracting officer or not in accordance with Department of the Army Technical Manual TM10-269 (see 3.3.4)	X	
Hems	Twisted or pleated		X
	Constructed with a partial turnunder when double turnunder is required	X	
Components and assembly	Any component not fabricated of applicable referenced material	X	
Markings; special and identification	Omitted, incorrect, illegible or misplaced		X
Cleanness	Grease or oil stains; thread ends not trimmed to 1/2 inch or less		X

4.3.3.2 Dimensional examination.- The completely fabricated tarpaulin shall be examined for defects in table II.

TABLE II.- Classification of defects for dimensional characteristics

Examine	Defect	Classification Major	Classification Minor
Overall dimensions	Smaller than specified dimensions less applicable minus tolerance indicated on drawings	X	
	Larger than specified dimensions and applicable plus tolerance indicated on drawings		X
Reinforcements	Finished dimensions of reinforcements less than specified by more than 1/2-inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects for dimensional characteristics (cont'd)

Examine	Defect	Classification Major	Minor
Tie ropes	Not within specified tolerance		X
Hems	Smaller than specified width:		
	- By more than 1/4-inch but not more than 1/2-inch		X
	- By more than 1/2-inch	X	
Grommets	Set off center of hems by more than 3/8-inch		X

4.3.3.3 Inspection levels and AQL's.- The inspection level and AQL's, expressed in terms of defects per hundred units, shall be as follows:

Examination	Inspection levels		AQL's
For defects applicable to table I	II	6.5	Major
		25.0	Total; major and minor defects combined
For defects applicable to table II	S-3	10.0	Major
		25.0	Total; major and minor defects combined

* 4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table III. The sample unit shall be one completely wrapped tarpaulin, fully prepared for delivery. The lot shall be the number of completely wrapped tarpaulins offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

TABLE III.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of cloth wrapping, loose stitching.

* 4.3.5 Examination of palletization.- An examination shall be made to determine that the palletization is in compliance with the requirements of section 5 of this specification. Defects shall be scored as specified in table IV. The sample unit shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

TABLE IV.- Examination of palletization

Examination	Defect
Finished dimensions	Length, width, or height exceeding specified maximum requirements.
Palletization	Not as specified. Container pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each tarpaulin shall be laid out flat with the inside facing up and the two side walls folded in toward the center to measure approximately 21 x 2 feet. The length shall be reduced by multiple folds to achieve a folded tarpaulin approximating 40 x 24 inches. The identification label shall be exposed and the resultant bundle shall be cross tied with cotton cord or rope.

5.1.2 Level C.- Each tarpaulin shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A or C as specified (see 6.2).

5.2.1 Level A.- One tarpaulin packaged as specified in 5.1, shall be wrapped and sewn in cotton osnaburg cloth conforming to class 2 of CCC-C-429; or burlap cloth conforming to class 3 of CCC-C-467. The wrapping shall be securely handsewn with type I or II, 16-ply cotton twine conforming to T-T-871, or type I, size No. 2 jute twine conforming to T-T-911, with approximately one stitch to the inch and every third stitch overhand knotted alternatively, the bottom and side may be machine-sewn. A minimum of five inches of wrapping material shall be gathered together on each of the four corners and securely hand-sewn into ears for handles. In lieu of the sewn wrapping indicated above, bias-sewn tubing conforming to MIL-T-40625 may be used. One end of the tubing may be machine-sewn. The formation of handles shall be effected by hand sewing in conformance with method as described above. Wherever machine sewing is used, the thread type, stitch type and the number of stitches per inch shall conform to the requirements specified in MIL-T-40625. However, the polyester thread used in manufacturing the end items may be used for effecting the machine-sewn closure of the wrapping or tubing.

5.2.2 Level C.- Tarpaulins, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Palletization.- Unless otherwise specified (see 6.2), tarpaulins packed as specified shall be palletized in accordance with load type II of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, any pallet pattern may be used provided approval is obtained from the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, shipments shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The tarpaulin made in accordance with this specification is intended to be used as a means of protection for the single trailer mounted laundry unit, type M-532 (MIL-L-40635) and its related equipment.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) First article.- When preproduction sample is not required (see 3.1).
(c) Stock number.
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When palletization is not required (see 5.3).

6.3 For access to a standard shade sample of thread, address the procuring office issuing the invitation for bids.

6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL

Navy - YD

Air Force - 84

Review activities:

Navy - YD

Air Force - 84, 85

User activity:


Navy - MC

Preparing activity:


Army - GL

Project No. 3510-0101


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

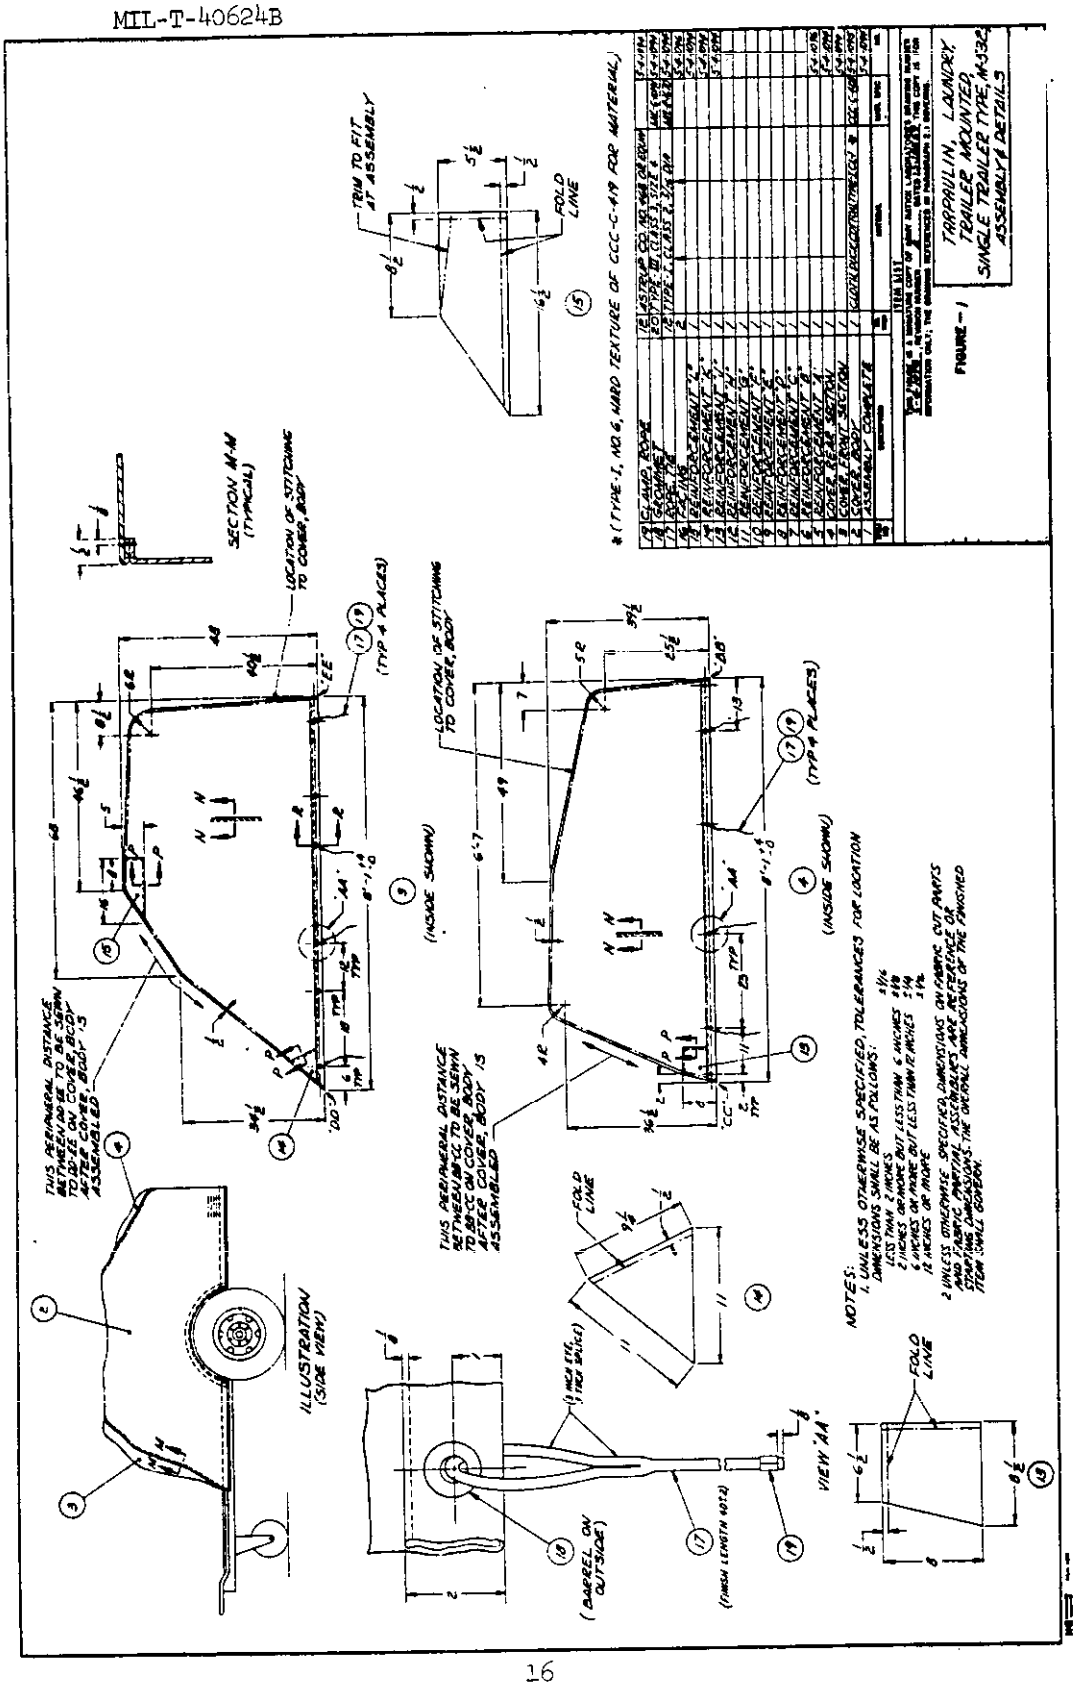

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

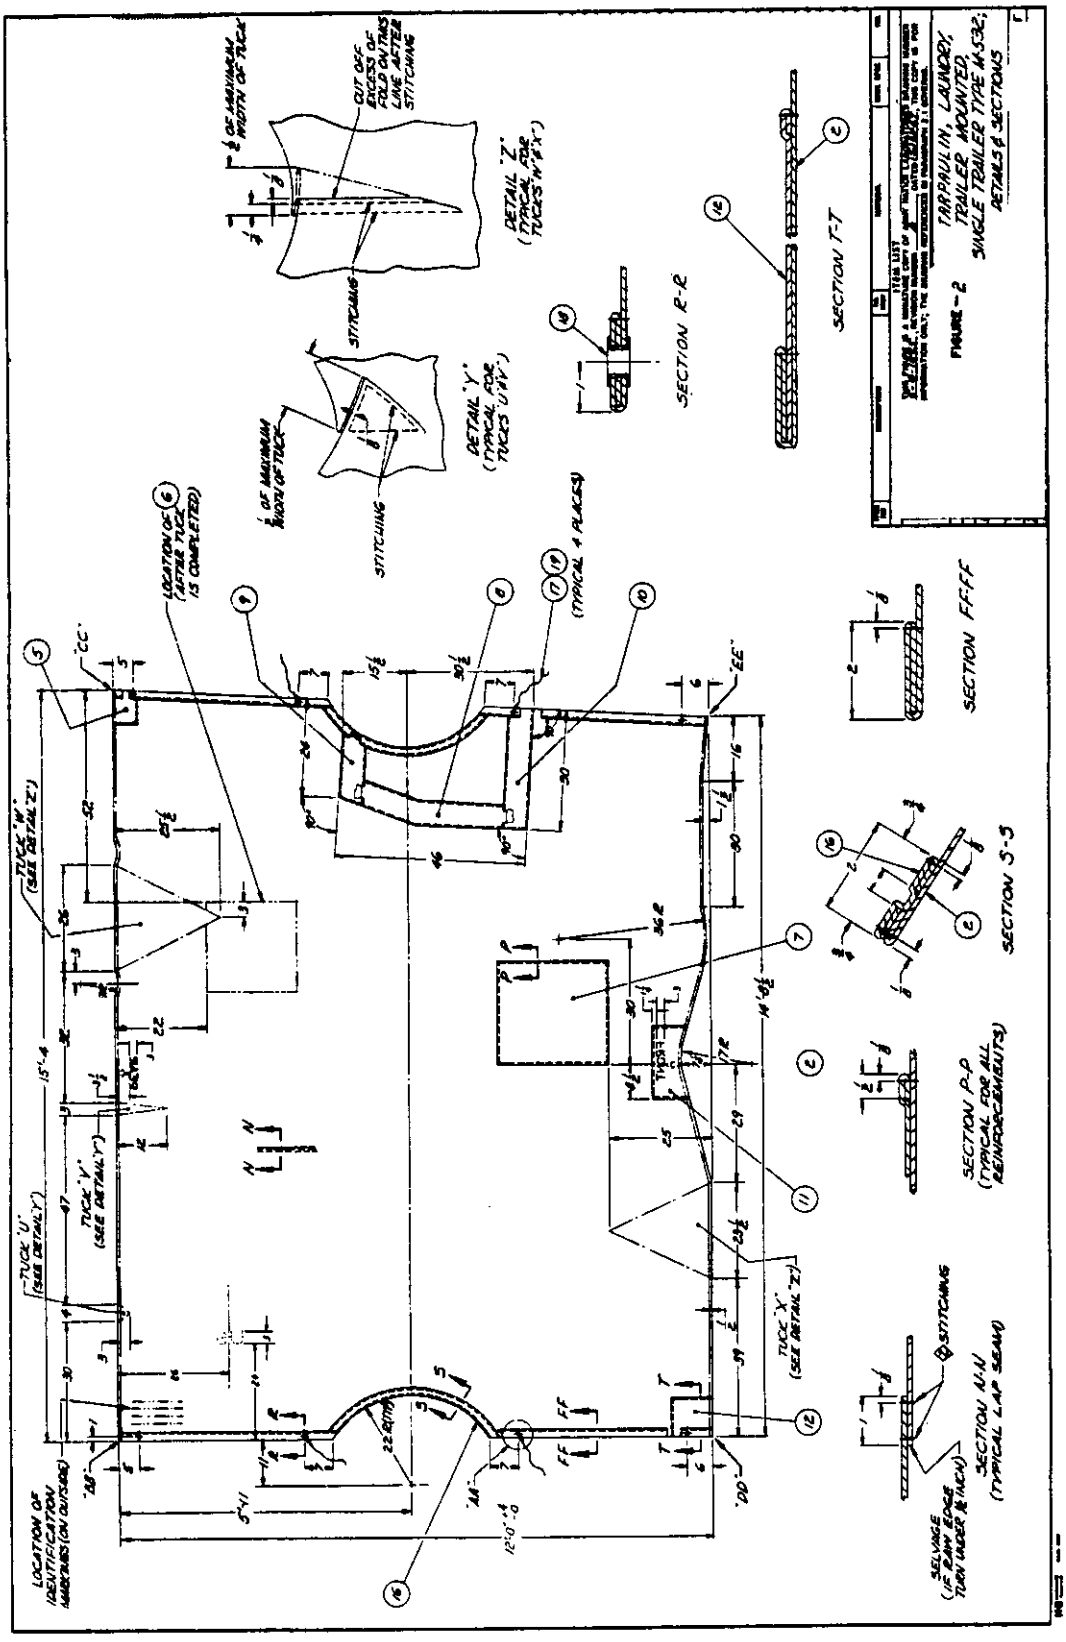

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

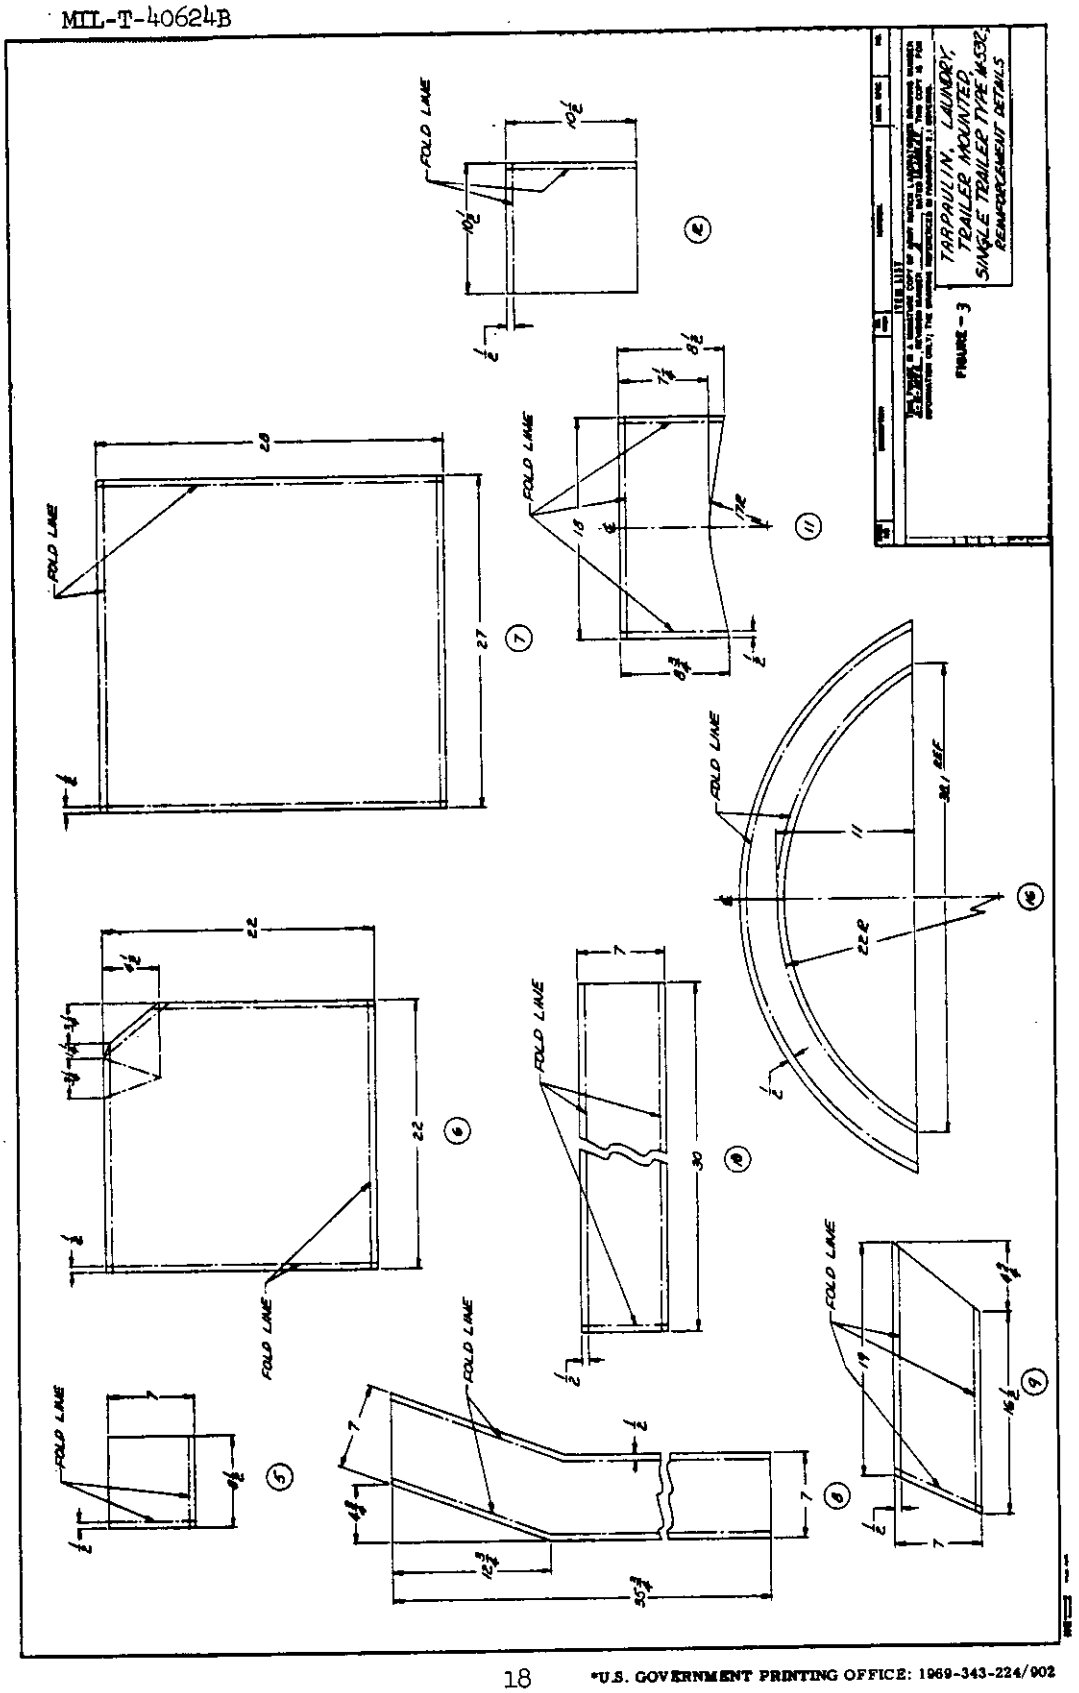

*U.S. GOVERNMENT PRINTING OFFICE: 1969-343-224/902

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

"to det: this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION Tarpaulin, Laundry, Trailer Mounted, Single Trailer Type, M-532
MIL-T-40624B

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:26Z
Check the source to verify that this is the current version before use.