[METRIC]

A-A-160E
July 24, 1997
SUPERSEDING
A-A-160D
December 12, 1989

COMMERCIAL ITEM DESCRIPTION

SACK, SHIPPING, PAPER (CUSHIONED)

This commercial item description has been approved by the General Services Administration.

1. SCOPE. This description covers cushioned paper sacks for shipping items weighing not more than 4.535 kg (10 pounds). The paper sacks shall be of the following types, as specified:

Type I - Regular
Type II - Self seal

2. SALIENT CHARACTERISTICS.

2.1. Construction. The walls of the sack shall consist of 2 layers of kraft paper with a cushioning medium of macerated paper inserted between the layers. The outer layer of kraft paper shall be water resistant. The fabricated sacks shall pass the water resistance test and the impact resistance test. The edge of the inside seam may be located anywhere along the back of the sack. Unless otherwise specified, sack opening shall be on the short side.

2.1.1. Sealing flap (Type II). The open end of the sack shall be provided with an adhesive sealing flap extending the entire width of the sack. The flap may be squared or tapered at the edges. The sealing flap shall have a strip of pressure sensitive adhesive, protected by a liner. The liner and pressure sensitive adhesive shall extend across the width of the flap to within 12.7 mm (1/2") of the edge on each side. Alternatively, the liner may extend up to 12.7 mm (1/2") over the edge of the flap on each side.


2.1.2. Tear strip. Unless otherwise specified, an easy opening tear strip shall be incorporated into the back of the sack, or on the closure flap extending across the width of the flap.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document, should be sent to: General Services Administration, Federal Supply Service, 26 Federal Plaza, New York N.Y. 10278 ATTN: Engineering Branch (2FYEE).

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.

2.1.3. Marking. Unless otherwise specified, each shipping sack shall be marked with the following: "**FROM**" in characters not less than 4.8 mm (3/16") high shall be printed in the upper left hand corner of the shipping sack. Immediately after "**FROM**", three horizontal lines shall be printed. Each line shall be 114 mm ± 3.2 mm (4-1/2" ± 1/8") long. Lines shall be spaced not less than 12.7 mm (1/2") apart. Approximately centered on the front of the sack, in characters not less than 4.8 mm (3/16") high, "**TO**" shall be printed. Immediately after "**TO**", four horizontal lines, spaced not less than 12.7 mm (1/2") apart shall be printed. The first three lines shall be 114 mm ± 3.2 mm (4-1/2" ± 1/8") long and the fourth line shall be 76.2 mm ± 3.2 mm (3" ± 1/8") long with a 6.4 mm ± 0.06 mm (1/4" ± 1/16") gap beginning 50.8 mm ± 0.06 mm (2" ± 1/16") from the left edge. A hyphen shall be printed in the gap. After the gap, the line shall continue an additional 19.1 mm ± 0.06 mm (3/4" ± 1/16"). Finally, at the end of the fourth line, "**(ZIP+4)**", shall be printed in characters not less than 4.8 mm (3/16") high. See below illustration for reference.

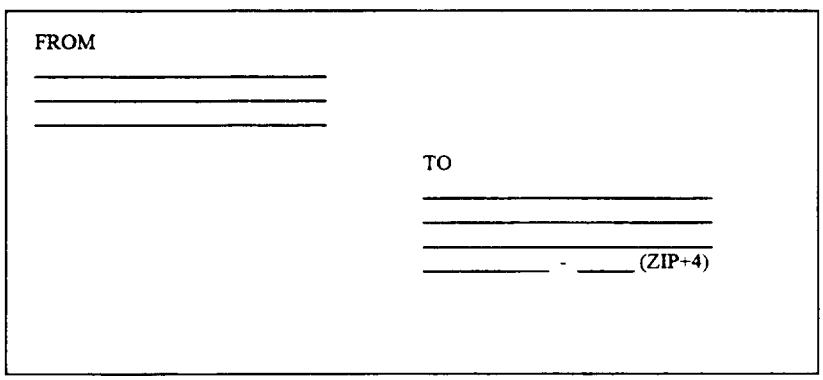

2.1.4. Special marking. Unless otherwise specified, each sack shall be marked with the logo and statement listed below, or similar statement indicating a specific PCRM content. The text color, location and size of the statement shall be in accordance with normal commercial practice.



CUSHIONING MEDIUM - 100% PCM BY WEIGHT
KRAFT PAPER - 5% PCM BY WEIGHT MINIMUM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.

2.2. Dimensions. Dimensions of the sacks shall be outside measurements, exclusive of the flap, expressed as width by length. Dimensions shall be as specified in Table I below, with a tolerance of ± 6.4mm (± 1/4"), unless otherwise specified.

TABLE I

Commercial size	Nominal size
000	10 x 20 cm (4" x 8")
00	12 x 25 cm (5" x 10")
0	15 x 25 cm (6" x 10")
1	18 x 30 cm (7-1/4" x 12")
2	21 x 30 cm (8-1/2" x 12")
3	21 x 36 cm (8-1/2" x 14-1/2")
4	24 x 36 cm (9-1/2" x 14-1/2")
4A	31 x 36 cm (12-1/2" x 14-1/2")
5	26 x 40 cm (10-1/2" x 16")
5B	29 x 44 cm (11-1/2" x 17-1/2")
6	31 x 48 cm (12-1/2" x 19")
7	36 x 50 cm (14-1/4" x 20")

2.3. Workmanship. Sacks shall be uniformly constructed and free from holes, tears, cuts, splits, or other defects which might impair their usefulness.

3. REGULATORY REQUIREMENTS.

3.1. Certification. The contractor shall certify that the cushioning medium used in the manufacture of this item contains 100% Post Consumer Materials (PCM), and that the kraft paper used in the manufacture of this item contains a minimum of 5% Post Consumer Material (PCM), in accordance with Title 40 of the Code of Federal Regulations Part 247, Comprehensive Guideline for Procurement of Products Containing Recovered Materials; Final Rule. The Government reserves the right to require proof of such conformance prior to first delivery, and thereafter as may be otherwise provided for under the provisions of the contract.

4. QUALITY ASSURANCE.

4.1. Product conformance. The product provided shall meet the salient characteristics of this commercial item description, conform to producer's own drawings, specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.

4.2. Water resistance test. Two drops of water shall be placed on the outside of the sack and covered with a watchglass. The water shall remain on the outside of the sack without being absorbed for not less than 10 minutes.

4.3. Impact resistance test. Determine the cubic capacity of the sack by multiplying the three factors F1, F2, and F3, together:

Cubic capacity = F1 x F2 x F3
F1 = specified length
F2 = 90% of specified width
F3 = 10% of specified width

Fill a graduated cylinder or similar volumetric device to 75% of the cubic capacity of the sack with dry, unpopped, popcorn. Transfer the popcorn to the sack and seal the open end of the sack. Drop each sack six times from a height of 91 cm (36") onto a hard surface such as uncarpeted concrete. The sack shall be dropped once on each face and once on each side. If any popcorn spills from the sack, the sack does not pass the impact resistance test.

5. PACKAGING, PACKING AND MARKING. Packing, packing and marking shall be as specified in the contract or purchase order.

6. REFERENCED DOCUMENTS. The issue of the referenced documents in effect on the date of the solicitation for offers or request for proposals shall be used to determine conformance with the requirements of this Commercial Item Description.

6.1. CFR, Title 40, Code of Federal Regulations, Protection of the Environment, Part 247. Copies may be purchased with a VISA, Master Card or prepaid check through: Government Printing Office, Washington DC; Phone 202-783-3238. When ordering ask for: Title 40, Parts 190-250; Stock Number: 869-013-00-146-0.

7. NOTES.

7.1. Ordering data. Purchasers shall specify the following in the contract or purchase order:

7.1.1. Type required.
7.1.2. Dimensions, expressed as width by length,
7.1.3. Packaging, packing and marking required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.

7.2. List of NSNs:

8105-00-281-1167
8105-00-281-1168
8105-00-281-1169
8105-00-281-1436
8105-00-290-0340
8105-00-290-0342
8105-00-290-0343
8105-00-498-6619
8105-01-385-7246
8105-01-385-7396
8105-01-385-7584
8105-01-386-2209
8105-01-386-2217

MILITARY INTERESTS:

No official DOD interest in this Commercial Item Description has been registered.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:05Z
Check the source to verify that this is the current version before use.