[METRIC]
A-A-2001
December 11, 1995
SUPERSEDING
W-L-305D
May 12, 1976

COMMERCIAL ITEM DESCRIPTION

LIGHT SET, GENERAL ILLUMINATION (EMERGENCY OR AUXILIARY)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. SCOPE

1.1 Scope. This CID covers emergency and auxiliary light sets powered by either a 6 or 12-volt rechargeable battery. The light sets are not intended for use in hazardous locations as defined in article 500 of NFPA 70. The light sets shall be designed to operate on a single phase power source of either 120 or 277 volts ac, 60 Hz, as specified (see 7.2).

2. CLASSIFICATION

2.1 Classification. Light sets furnished under this specification shall be of the following types and classes, as specified (see 7.2).

Type I - Emergency light set.
Type II - Auxiliary light set.
  Class A - Single-headed unit.
  Class B - Double-headed unit.

3. SALIENT CHARACTERISTICS

3.1 Standard Commercial Product. The light set shall be the manufacturer's standard commercial product except for any changes necessary for compliance with this CID.

3.2 UL conformance. The light set shall meet the applicable requirements of UL 924. Evidence of conformance with UL standards shall be a UL label or listing mark, or a certified test report (based on tests conducted within the past two years) from an independent testing laboratory acceptable to the Government, indicating the light set has passed all applicable tests.

3.3 General. Each light set shall consist of a rechargeable sealed maintenance-free battery, an indicator light, a battery charger, lamp(s) (fluorescent or incandescent), and a plastic or steel enclosure. The design shall be simple in construction, shall permit easy accessibility to component parts for cleaning, inspection, adjustment, or replacement, and shall provide reliable operation. Similar component parts and assemblies of identical model number cleaners shall be fully interchangeable. Interchangeability shall not require alteration or modification.

3.4 Battery. The battery shall be 6 or 12-volt rechargeable sealed maintenance-free type. The battery shall operate the lamp(s) for a minimum of 90 minutes after power is interrupted. The contractor shall provide evidence indicating that batteries of the same design and construction have been operating satisfactorily for 8 years. The battery shall have a life expectancy of 10 years.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 6230

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

3.5 Battery Charger. The battery charger shall be contained within the enclosure of the unit and shall maintain the battery in a full state of charge under normal power supply conditions. After a power interruption, the battery charger shall recharge the battery within 12 hours after a continuous discharge of 90 minutes through the lamp load. The battery charger shall employ a solid state silicon or selenium rectifier and shall be of the multi-rate type. The battery charger shall operate without manual intervention, commence recharging the battery immediately after power restoration, and continue charging until the battery has been fully charged.

3.6 Lamp heads. The lamp head(s) shall be on top of the enclosure and shall be adjustable in the horizontal and vertical planes. The lamp head(s) shall rotate a minimum of 270° in the horizontal plane and a minimum of ± 15° in the vertical plane. The light output from each lamp head shall be a minimum of 200 lumens when tested at the nominal dc voltage rating of the unit.

3.7 Indicator light. An indicator light, mounted on the outside of the unit, shall illuminate when the unit is receiving alternating current from the normal power supply. The indicator light shall be clearly labeled on the exterior of the unit as "AC ON," "AC POWER ON," or "AC POWER ON Indicator Light."

3.8 Test switch. A momentary test switch to simulate a power failure shall be mounted on the unit.

3.9 Low voltage disconnect. When the voltage discharges to 3.5 volts for a 6-volt battery and 7.0 volts for a 12-volt battery, an automatic low voltage disconnect shall break the circuit.

3.10 Workmanship. The light set shall be constructed, assembled, and finished in a manner to assure good quality equipment of a neat general appearance and free from imperfections which may affect durability, serviceability, and appearance.

3.11 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Referenced Documents. The documents referenced in this CID shall be the issues in effect on the date of issuance of the invitation for bids or request for proposals unless otherwise specified. The documents form a part of this CID

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

to the extent specified. In the event of a conflict between this CID and the documents referenced herein, this CID shall take precedence.

National Fire Protection Association:

NFPA 70 - National Electrical Code.

Application for copies of NFPA standards should be addressed to the National Fire Protection Association, One Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

Underwriters Laboratories Inc., Standards:

UL 924 - Safety Emergency Lighting and Power Equipment.


Application for copies of UL standards should be addressed to Underwriters Laboratories Inc., Publication Stock, 333 Pfingsten Road, Northbrook, IL 60062.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number, and date of this CID.
b. Voltage (see 1.1).
c. Type and class (see 2.1).
d. Preservation, packing, and marking desired.

7.3 Part Numbering. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID A-A-2001.

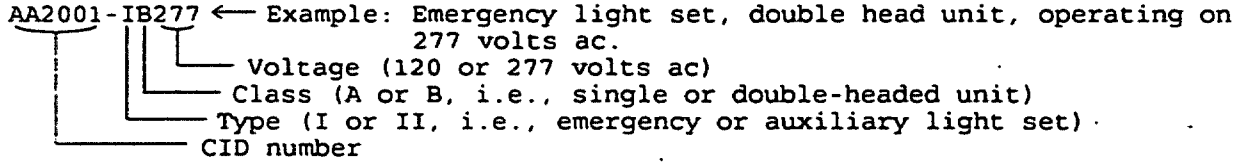

7.4 National Stock Numbers (NSNs). The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

NSN	Type	Class	Voltage
6230-00-283-3232	I	A	120
6230-00-283-3237	I	B	120
6230-01-217-7185	I	B	277
6230-00-137-6394	II	B	120

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

Preparing Activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.