[INCH-POUND]
A-A-2670A
March 20, 1995
SUPERSEDING
A-A-2670
May 4, 1990

COMMERCIAL ITEM DESCRIPTION

STAPLE, TACKER

The General Services Administration has authorized the use of this commercial item description, for all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This commercial item description covers tacker staples of the preformed type, cemented together in strip form for use in manually-operated compression type tackers conforming with Federal Specification GGG-T-20.

1.2 Classification. Tacker staples shall be of the following types and sizes.

Type I - Medium duty.

Size 3 - Leg length	3/16 inch	(0.47 cm)
Size 4 - Leg length	1/4 inch	(0.64 cm)
Size 5 - Leg length	5/16 inch	(0.79 cm)

Type II - Heavy duty.

Size 4 - Leg length	1/4 inch	(0.64 cm)
Size 5 - Leg length	5/16 inch	(0.79 cm)
Size 6 - Leg length	3/8 inch	(0.95 cm)
Size 7 - Leg length	1/2 inch	(1.27 cm)

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 5315


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

2. SALIENT CHARACTERISTICS

2.1 Type I staples. Type I, medium duty staples shall be in accordance with the dimensions shown in figure 1. The staples shall be preformed to a U-shape, conforming to figure 1. The staples shall be cemented together in strip form, each strip consisting of a minimum of 137 staples and a maximum strip length of 4.48 inches (11.38 cm).

The number of staples per strip in each box (see 5.1) shall average 140. The cement shall be applied smoothly and shall be set in such a manner that the surfaces of the strips shall be free from tackiness. The cemented staple strip shall easily slide through the tacker (see 2.3). The staple points or ends shall be of such design that the staples will meet the test in section 4. The steel wire shall be so tempered as to provide penetration of the staple to a firm seat without buckling or fracturing. The leg length(s) of the staples shall be in accordance with the sizes(s) specified. The staples shall be tinned, galvanized, or made equally corrosion resistant.


Figure 1. Type I, medium duty staple(s).

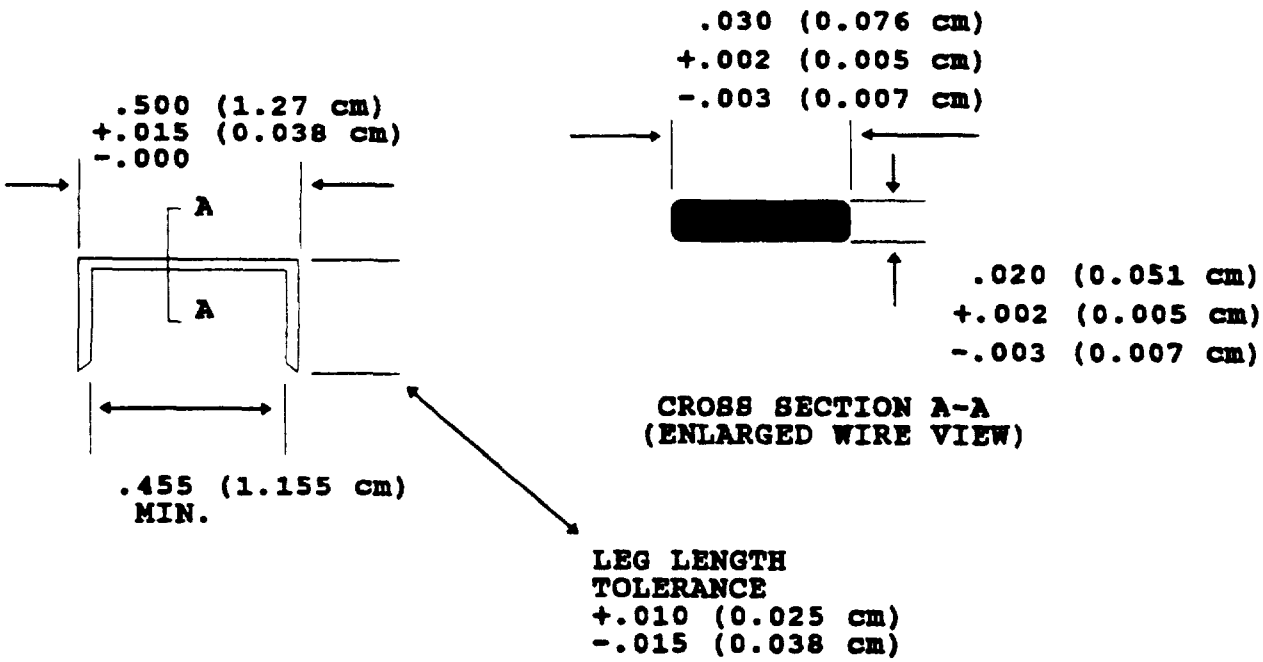

2.2 Type II staples. Type II, heavy duty staples shall be in accordance with paragraph 3.1, except that the staples shall be in accordance with the dimensions shown in figure 2, and shall be cemented together in strips consisting of a minimum of 82 staples and a maximum strip length of 4.37 inches (11.1 cm). The number of staples per strip in each box (see 5.2) shall average 84.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

Figure 2. Type II, heavy duty staple(s).

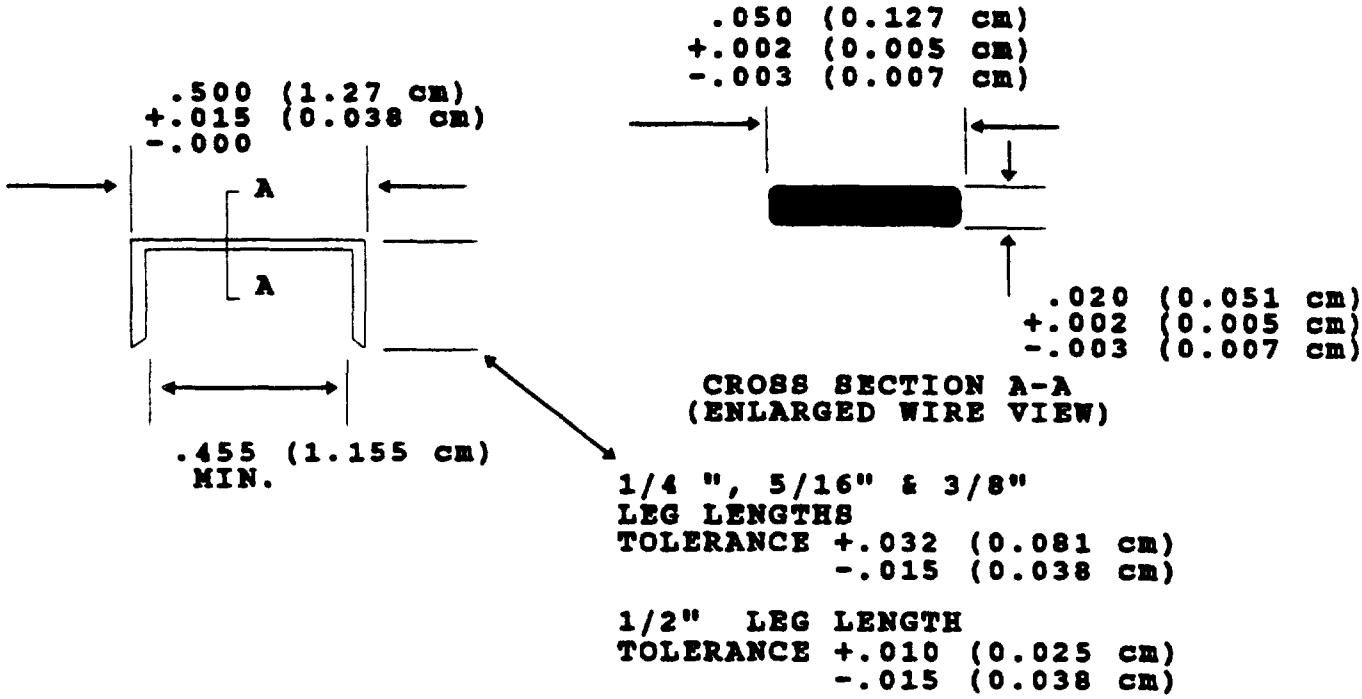

2.3 Workmanship. The tacker staples shall function smoothly in tackers conforming with Federal Specification GGG-T-20. The staples shall be clean, well formed and free from defects that affect appearance or serviceability.

2.4 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parentheses are for information purposes only.

2.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

2.6 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

3. REGULATORY REQUIREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.

3.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description, and that the product conforms to the producer's own drawings specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.6 Testing.

4.6.1 Performance test. Each sample strip of staples selected in accordance with paragraph 4.5 shall be loaded into an appropriate tacker for the type I or II staple being tested. One-hundred type I or fifty type II staples, as applicable from each strip shall be driven into a clear piece of finished Douglas fir lumber to full penetration. The sample strip shall be considered nonconforming if 98 percent of the staples in the strip do not dispense smoothly and achieve full penetration or any staple buckles, fractures or exhibits any other defect.

5. PACKAGING

5.1 Type I. Thirty-six (36) strips of staples shall be packaged in a close-fitting box of the type normally used for this product. Each box shall contain a minimum of 5,040 staples. The box shall be secured to prevent accidental opening during shipment, handling, storage and redistribution.

5.2 Type II. Sixty (60) strips of staples shall be packaged in a close-fitting box of the type normally used for this product. Each box shall contain a minimum of 5,040 staples. The box shall be secured to prevent accidental opening during shipment, handling, storage and redistribution.

5.3 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of documents

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.


6.1.1 Federal specifications and standards are available from the General Services Administration Business Service Bureau, Specification Section (3FPB-W), Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. Type and size of staples.
c. Packing, palletization, labeling, and marking desired.

6.3 Part Numbering. Tacker staples conforming with this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the specification number, type and size. An example of the part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part numbers are not required to be placed on the product or container.

EXAMPLE:

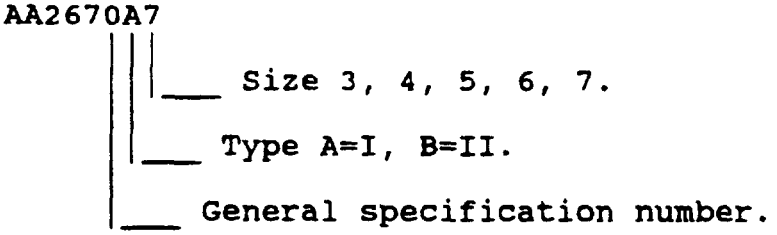

MILITARY INTERESTS:

Custodian:

Air Force - 82

Review Activity:

Army - GL
Air Force - 99

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:25Z
Check the source to verify that this is the current version before use.