INCH-POUND

A-A-2971A
February 5, 2002
SUPERSEDING
A-A-2971
June 7, 1996

COMMERCIAL ITEM DESCRIPTION

PLIERS, SLIP JOINT (LINE CLAMP)

The General Services Administration has authorized the use of this Commercial Item Description by all federal agencies.

1. SCOPE. This Commercial Item Description covers one type of line clamp slip joint pliers used for installing line clamps.

2. CLASSIFICATION. Not applicable.

3. SALIENT CHARACTERISTICS.

3.1 Design. The pliers shall simultaneously hold a number 10 bolt, compress single and multiple line clamps, and automatically retain them in a closed position, leaving both hands free to apply the clamp nut or additional clamps. The pliers shall be provided with a three-hole slip joint adjustment capable of a 3/4-inch adjustment. The pliers shall be properly proportioned in all parts so as to be strong, durable and easy to operate.

3.2 Material. The pliers shall be made of steel and either investment cast or forged. The joint and retaining pawl shall be steel.

3.3 Jaws. The jaws shall operate through the maximum open/close travel of the tool in a smooth and uniform manner.

3.3.1 Lower jaw. The lower jaw shall be slotted to allow clearance for contain a mechanism to retain a number 10 bolt. The lower jaw shall contain a retaining pawl for holding the line clamp in a closed position.

3.3.2 Upper jaw. The upper jaw shall be slotted to allow sufficient clearance for operation.

3.4 Joint. The pliers shall be joined in a permanent manner through the use of a bolt and nut and shall not loosen or require adjustment. There shall be uniform smooth movement through the respective number of adjustment positions with a minimal amount of side play.

3.5 Retaining Pawl. The retaining pawl shall be securely attached to the lower jaw and be capable of holding the clamp in the closed position.

3.6 Handles. The handles shall be shaped to afford a comfortable handgrip and shall be free from rough edges and corners. Inner handle surfaces shall be well rounded or beveled so as to prevent injury to the hand. The outer handgrip surfaces of the handles shall be knurled, impressed or scored to minimize hand slippage.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore, 6FEE, 1500 Bannister Rd., Bldg# 6, Kansas City, Missouri. 64131.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.7 Dimensions. The pliers shall be in accordance with the dimensions of figure 1. The jaw thickness of the pliers shall be 1/2 inch plus or minus 1/16 inch. The specified dimensions shall be taken with the pliers in the first working position, as shown. Unless otherwise specified limits on dimensions are: fractional dimensions, plus or minus 1/2 inch, angular dimensions, plus or minus 5 degrees.

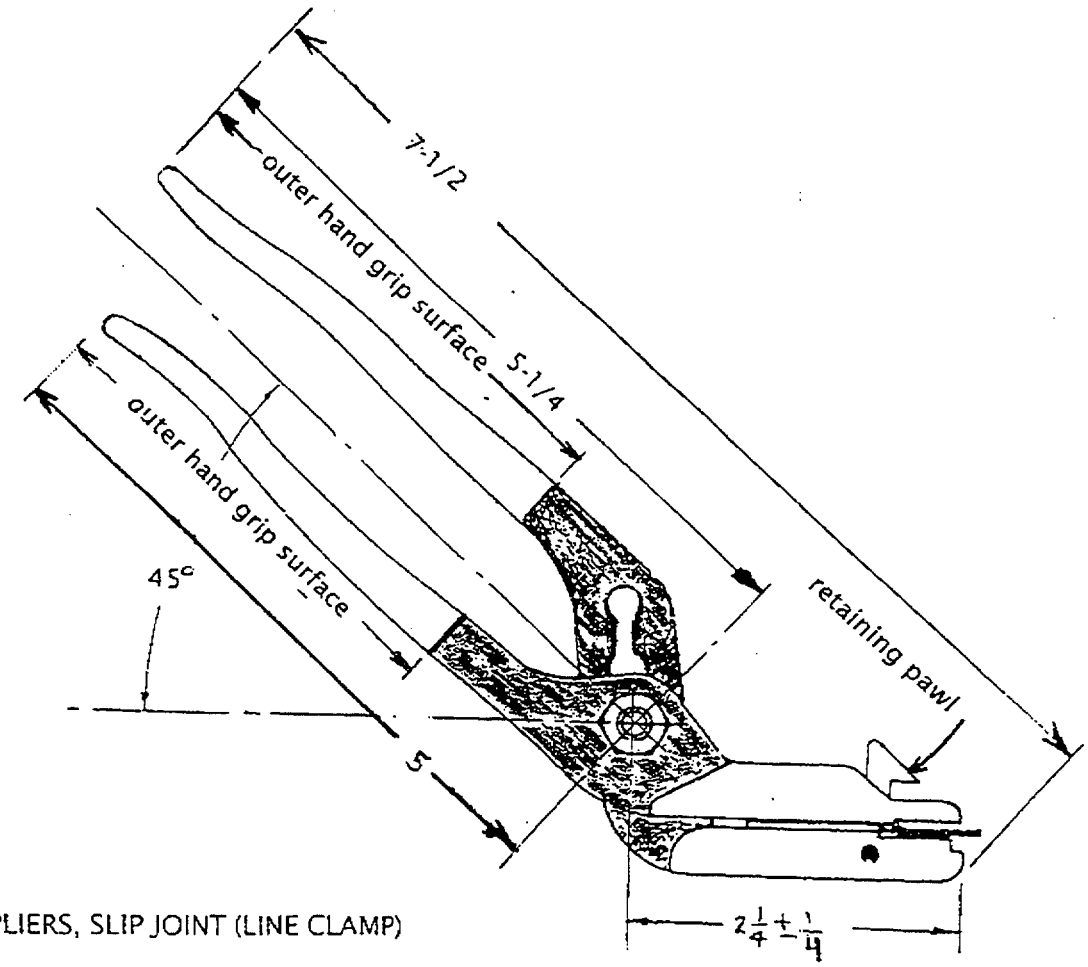


Figure 1. PLIERS, SLIP JOINT (LINE CLAMP)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

3.10. Coating. Excluding the joint and retaining pawl, the pliers shall be nickel chromium plated. The joint and pawl shall be black oxide coated.

3.11 Instructions. The pliers shall be furnished with an instruction sheet. The instruction sheet shall contain written step-by-step instructions and illustrations showing how to assemble and fasten line clamps.

3.12 Identification marking. The pliers shall be marked with the manufacture's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

3.13 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Coating, plating, and finishes shall be smooth adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety or appearance.

4. REGULATORY REQUIREMENTS.

4.1 Recovered Materials. The manufacturer is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the Contracting Officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Product conformance. The product provided to the Government shall conform to the contractually specified requirements. For product characteristics and requirements that are not contractually specified, the provided product shall conform to the supplier's own drawings, standards, specifications and quality assurance practices for the highest quality product commercially offered by the supplier. If the supplier does not commercially offer the product, the best commercial practices shall apply. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the supplier is responsible for the performance of all inspection requirements and may use any commercial facilities (including the suppliers own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Packaging requirements for preservation, packing, and marking of packages shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

7. NOTES. This section contains information of a general or explanatory nature that is not mandatory.

7.1 Addresses for obtaining copies of reference documents.

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20401-9371

GSA Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

7.2 National Stock Numbers (NSNs). The following NSN correspond to the item specified in this CID. This NSN may not be indicative of all possible NSNs associated with this CID.

NSN 5120-00-770-9362

7.3 Ordering data. Purchasers should select the preferred options permitted herein and shall include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) When applicable, the appropriate NSN.

7.4 Key words. Pliers, Slip Joint, Line Clamp

MILITARY INTERESTS:

None: DoD has no registered interest in revisions or notices to this Commercial Item Description until further notice.

Preparing Activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.