[METRIC]
A-A-3098
June 2, 1995
SUPERSEDING
A-A-3098
May 3, 1987

COMMERCIAL ITEM DESCRIPTION

BAG, PAPER, MERCHANDISE

This Commercial Item Description has been approved by the General Services Administration/Federal Supply Service.

1. Scope. This description covers merchandise bags used primarily for the packaging of millinery and notions.

2. Classification. The bags shall be of the following types.

Type I - Flat
Type II - Square

3. Salient characteristics.

3.1. Construction. Bags shall be fabricated from unbleached kraft paper in accordance with the requirements specified in Table I. Bags shall be made with the lip, bottom, and center seam or bottom fold formed to the rear. The length of the lip shall not be included in the dimensions of the bag (See Fig. 1).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document, should be sent to: General Services Administration, Federal Supply Service, 26 Federal Plaza, New York N.Y. 10278 ATTN: Engineering Branch (2FYEE).

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

Table I, Standard dimensions and basis weight

Dimensions: cm (inches) Tolerance: ± 6.4 mm (± 1/4 inch)			Basis weight of paper g/m^2 (lbs, 24x36-500)	
Bag No.	Type I A X B	Type II A X B X C	Type I	Type II
4	10 X 16 (4 X 6-1/4)	- -	49 (30)	-
5	13 X 19 (5 X 7-1/2)	- -	49 (30)	-
6	16 X 24 (6-1/4 X 9-1/4)	- -	49 (30)	-
6L	16 X 41 (6-1/4 X 16)	- -	49 (30)	-
6XL	16 X 91 (6-1/4 X 36)	- -	49 (30)	-
7	19 X 27 (7-1/2 X 10-1/2)	- -	49 (30)	-
8	22 X 28 (8-1/2 X 11)	- -	49 (30)	-
9	23 X 31 (9 X 12)	- -	49 (30)	-
10	25 X 33 (10 X 13)	22 X 33 X 5 (8 X 13 X 2)	49 (30)	49, 65 or 81 (30, 40 or 50)
12	31 X 38 (12 X 15)	25 X 38 X 5 (10 X 15 X 2)	49 (30)	49, 65 or 81 (30, 40 or 50)
13	33 X 46 (13 X 18)	28 X 46 X 5 (11 X 18 X 2)	49 (30)	49, 65 or 81 (30, 40 or 50)
15	38 X 46 (15 X 18)	31 X 46 X 8 (12 X 18 X 3)	49 (30)	49, 65 or 81 (30, 40 or 50)
17	43 X 53 (17 X 21)	36 X 53 X 8 (14 X 21 X 3)	49 (30)	49, 65 or 81 (30, 40 or 50)
21	53 X 61 (21 X 24)	43 X 61 X 10 (17 X 24 X 4)	49 (30)	49, 65 or 81 (30, 40 or 50)

Note: See Fig.1 for bag measurements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

3.2. Physical requirements. Bags shall meet or exceed the physical requirements as specified in Table II:

Table II, Physical requirements

Basis Weigth ± 5% g/m^2 (lbs)	Average Bursting Strength, points, minimum	Average Tearing Resistance grams, MD, minimum
49 (30)	17	42
65 (40)	24	67
81 (50)	31	92
Tappi T-410	Tappi T-403	Tappi T-414

3.3. Workmanship. Bags shall be uniformly constructed. Bottom and center seams or bottom fold shall be securely sealed. The bags shall be free from defects which detract from their appearance or which may impair their serviceability.

4. Regulatory requirements. The contractor shall certify that the product offered shall include a minimum of 5% post-consumer recovered material, in accordance with Paragraph 23.403 of the Federal Acquisition Regulation (FAR). The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. Quality assurance:

4.1. Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2. Suppliers are encouraged to use quality control (QC) techniques that exhibit control over their processes, e.g. (Statistical Process Control SPC techniques), as defined in American National Standards Institute (ANSI) Z1.1, Z1.2 and Z1.3/American Society for Quality Control (ASQC) 8.1, B.2 and B.3 that systematically reduce excess variations. Objective evidence shall be available that demonstrates overall measurement adequacy

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

techniques and controls. These techniques shall ensure quality levels equal to, or greater than, those cited in applicable technical document, or, herein.

End item inspection/testing may be used by the offeror or the Government representative, as a means to determine the effectiveness of the in process quality controls. In process controls shall not be substituted for end item performance testing.

For those characteristics for which there are no such controls, or for end item performance test, lot by lot sampling for inspection/test shall be required. Sampling shall be in accordance with (ANSI)/(ASQC) Z1.4. An inspection lot shall consist of all bags manufactured by the same process from the same components at the same time. The sample unit shall be one bag. The inspection level shall be S-2 with an AQL of 4.0 % defective for construction and workmanship. The inspection level shall be S-1 with an AQL of 2.5 % defective for physical requirements.

The supplier must provide objective evidence (tests and inspection records) that the presented material meets the requirements of the sampling plan as indicated above.

6. PACKAGING.

Packaging, packing and marking shall be as specified in the contract or purchase order.

7. NOTES.

7.1. Referenced documents: The issues of the referenced documents in effect on the date of the solicitation for offers or request for proposals shall be used to determine conformance with the requirements of this Commercial Item Description.

7.1.1. Federal Regulations.

Federal Acquisition Regulation. Paragraph 23.403

Copies of the U.S. Code may be obtained through the Congressional Sales Office, U.S. Government Printing Office, Washington D.C., 20402.

7.1.2. Other publications.

ANSI/ASQC Z1.4 - American National Standards Institute (ANSI)/ American Society for Quality Control (ASQC), Sampling Procedures and Tables for Inspection by Attributes.

Available from: American Society for Quality Control, P.O. Box 3005, 611 E. Wisconsin Avenue, Milwaukee, WI 53201-4606.

Source: https://assist.dla.mil Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.


TAPPI test methods are available from the Technical Association of the Pulp and Paper Industry, Technology Park, P.O. Box 105113, Atlanta, GA 30348.

7.2. Ordering data. Purchasers shall specify the following in the contract or purchase order:

(1). Title, number, and date of this Commercial Item Description.
(2). Type and bag number (size) required.
(3). Packaging, packing, and marking.
(4). Dimensions as shown below:

Fig. 1

Bag style and method of measuring

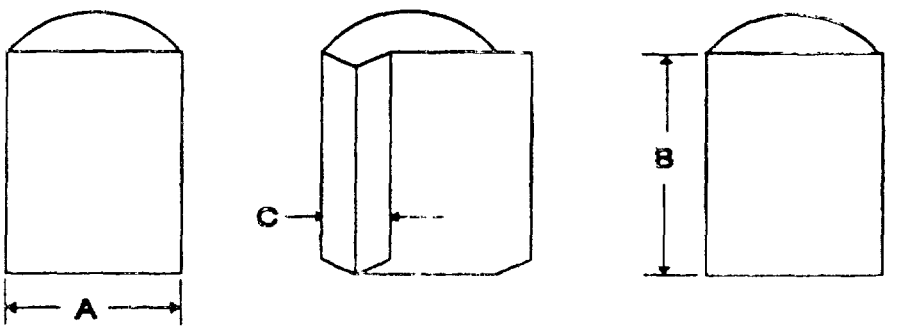

Face width (A): Measure along the front face of the folded bag.
Bag length (B): Measure along center of the bag face from the bottom of the top edge.
Bag gusset (C): Measure across flattened area of the bag.

MILITARY INTERESTS:

None registered.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.