[Metric-SI]
AA-C-00400F (GSA-FSS)
December 20, 1991
SUPERSEDING
Int. Fed. Spec.
AA-C-00400E (GSA-FSS)
November 16, 1989

INTERIM FEDERAL SPECIFICATION
CHAIRS, ROTARY AND STRAIGHT, WOOD OFFICE
(UNITIZED FURNITURE STYLE)

This Interim Federal Specification was developed by the Engineering Division, Federal Supply Service, National Furniture Center, 3FNEW-CO, Washington, D.C. 20406 based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers wood office chairs designed to be used with the Unitized Wood Office Furniture. All measurements are in SI (metric) units.

1.2 Classification.

1.2.1 Types, classes and styles. The chairs covered by this specification shall be of the following types, classes, and styles (see 6.1). Dimensions are overall and in millimeters (mm).

Type I - Straight (leg) chairs.

Class 1 - With arms.
Class 1A - With arms, closed back conference chair.
Class 2 - Without arms.

Type II - Rotary Chairs.

Class 1 - With arms, wood "star" base with casters (except jury base chair).

Style A - Tilting with fixed seat and back, "star" base.
Style B - Tilting with fixed seat and back, jury base.
Style C - Posture, executive, 890 mm high, fixed seat with tilting back.
Style D - Posture, executive, 945 mm high, fixed seat with tilting back.
Style E - High back, tilting with fixed seat and back.

Class 2 - Without arms, wood "star" base with casters.

Style A - Posture, secretarial, fixed seat with tilting back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents of the issues in effect on the date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

Federal Standards:

Fed. Test Method Std. No. 191 - Textile Test Methods.

(Federal Specifications and Federal Test Methods are available, for bidding purposes, from General Services Administration, Business Service Centers in Boston; New York; Philadelphia; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; Los Angeles; San Francisco; and Seattle, WA.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Military Standards are available for bidding purposes from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Ave., Philadelphia, PA 19111-5094.

U.S.D.A. Handbook:

Agriculture Handbook No. 72 - Wood Handbook

(Copies are available from Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

2.2 Commercial Standards and Publications.

American National Standards Institute Publications:

ANSI/HPMA HP-1983 - Standard for Hardwood and Decorative Plywood
ANSI X5.1-1985 - General Purpose Office Chairs - Tests
ANSI/NFPA 260-1989- Cigarette Ignition Resistance of Components of Upholstered Furniture

(ANSI standards are available from American National Standards Institute, Inc. 1430 Broadway, New York, NY 10018.)

American Society for Testing and Materials Standards:

D 905 - Standard Method of Test for Strength Properties of Adhesives in Shear by Compression Loading.
D 1233 - Twine made from Bast and Leaf Fibers.
D 1682 - Breaking Load and Elongation of Textile Fibers.
D 3597 - Woven Upholstered Fabrics - Plain, Tufted or Flocked.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

D 3770 - Standard Specification for Flexible Cellular Materials - High Resilience Polyurethane Foam (HR).
D 3776 - Mass per Unit Area (Weight) of Woven Fabrics.

(ASTM Standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Upholstered Furniture Action Council Standard:

U.F.A.C. - Component Test Methods - 1983

(U.F.A.C. Standards are available from U.F.A.C. Box 2436, High Point, NC 27261.)

State of California Technical Information Bulletin:

Bulletin 117-1980 - Requirements, Test Procedures and Apparatus for Testing the Flame Retardance of Resilient Filling Materials Used in Upholstered Furniture.

(State of California Technical Bulletin is available from California Department of Consumer Affairs, Bureau of Home Furnishings, 3485 Orange Grove Ave., North Highlands, CA 95660-5595.)

3. REQUIREMENTS

3.1 Materials. The following paragraphs describe minimum requirements for materials used in construction and assembly.

Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

3.1.1 Wood.

3.1.1.1 Varieties. The wood used in the construction of the exposed components shall be Cherry or Walnut. Only one wood species must be used for exposed parts on any one chair. The wood used in the construction of the unexposed components shall meet the following requirements from Wood Handbook No. 72, Tables 4-2 and 4-4. Use these tables as a guide for selecting an acceptable wood species. Actual lumber purchased does not need to be tested except to ensure it is the species ordered.

Specific gravity	Modulus of rupture	Side Hardness
.52 min. at 12% moisture content (M.C.) or green	75 788 kPa min. at 12% M.C.	1870 N min. at 12% M.C.

3.1.1.2 Characteristics. The solid wood used for exposed parts shall be bright, well sanded, and free from brashness,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

discolorations, worm holes, honeycomb, splits, and shake. The wood for steambent parts shall be selected from long straight grained uniform stock. The wood used for unexposed parts may contain small defects, such as pin knots, sapwood, or mineral streaks provided the strength of the part is not affected. Steambent parts can be repaired if outside grain breaks during bending, provided the joint is tight and the repair is neatly accomplished with wood matching for color and grain.

3.1.1.3 Plywood. All plywood shall be 5 ply, a minimum of 13 mm thick, and constructed in accordance with the requirements of ANSI HP-1983 and as specified herein. Minimum Type II bond required. Crossbanding shall be not less than grade 2. Face and back veneers shall be not less than 0.8 mm thick. Exposed faces of plywood chair backs shall have B grade (b) veneer (species as specified in 3.1.1.1), either plain sliced or flat cut and matched for color and grain to present a uniform appearance. Minimum Sound grade veneer shall be used on unexposed faces of backs. Chair backs shall be curved to conform to curved back support rail.

3.1.1.4 Laminated plywood/band sawed parts. Alternatively where unexposed, steambent wood parts are specified, bandsawed solid wood or laminated wood parts may be substituted. Alternatively where unexposed, bandsawed wood parts are specified, laminated wood parts may be substituted. Substitute parts shall be the same dimension as the original parts.

The grain direction of all plies in laminated wood parts shall be parallel. Veneer plies shall be full length, 3 mm thick maximum, beech, birch, cherry, walnut, or maple. Adhesive, see 3.1.3.

3.1.1.5 Wood seasoning. All wood shall be thoroughly air-seasoned and then uniformly kiln-dried without honeycomb or case hardening to a moisture content of 5 percent. At the time of assembly, moisture content shall not exceed 7 percent. Parts which require steambending shall be air-seasoned before bending, and uniformly kiln-dried to a moisture content of 5 percent after bending is completed. Kiln-dried parts shall be allowed to temper approximately 2 weeks in a sheltered area to equalize moisture before milling. Steambent parts shall remain in forms or shackles until drying is completed.

3.1.2 Dowels. Dowels shall be of beech, birch, hickory, or maple and have a maximum 5% moisture content at time of assembly. They shall be spirally or longitudinally grooved. Unless otherwise specified herein, dowels shall have a minimum diameter of 9 mm and the length shall be not less than 4 times the diameter.

3.1.3 Adhesive. Block shear strength: 19 300 kPa minimum. See test procedure paragraph 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2. Upholstery materials and flammability requirements. All upholstery cover materials, welts, interior fabrics, fillings, and paddings shall meet NFPA-260 Class 1 construction, or UFAC Class 1 flammability requirements. All polyurethane foam shall meet California Technical Bulletin 117, Section A, Part I and Section D, Part II.

3.2.1 Upholstery fabric. The upholstery fabric shall be 100% flat nylon, dyed, plain weave, not less than 474 g/m^2 exclusive of back coating, complying with all requirements of ASTM D 3597 with the following exceptions. Flammability requirement: See par. 3.2.

Exception to ASTM D 3597:

A. In section 7.6, delete Note 6 entirely;
B. Delete sections 7.6.2, 7.6.3 and 7.6.4 entirely;
C. In Table 1, change requirements of:
   Breaking strength (load) to 1111 N, min. for warp and filling;
   Tongue tear strength to 89 N, min for warp and filling;
   Resistance to yarn slippage to 178 N, min for warp and filling;
D. In Table 1, Surface abrasion shall pass heavy-duty requirements.

The color shall conform to GSA Standard Sample colors FSS-F-06011 thru FSS-F-06020. See 6.2.

GSA Standard Samples are available from GSA-FSS, Furniture Center, Engineering Division, Washington DC 20406.

3.2.2 Filler materials. Resilient materials that provide a comfortable, durable chair that conforms to the final appearance shown in figures. Flammability requirement: See par. 3.2.

3.2.3 Sheet fabric. Any of the following materials are acceptable over foundation springs. Flammability requirement: See par. 3.2.

Polyethylene, spunbonded - 39 g/m^2 minimum (Test procedure: 4.4.3).
Polypropylene, spunbonded - 64 g/m^2 (minus 2.7 g/m^2) minimum (Test procedure: 4.4.3).
Polypropylene, woven - 102 g/m^2 minimum (Test procedure: 4.4.3).

3.2.4 Polyurethane foam.

Seat: Slab or moulded, high resilience type, polyurethane foam with a minimum 35 kg/m^3 polyurethane polymer density. Foam over spring seat: 156 N (±18 N) Indentation Force Deflection (IFD) (25 percent deflection) required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Foam over wood seat pan: Minimum 178 N IFD (25 percent deflection required.
Back: Slab or moulded, conventional or high resilience type polyurethane foam with a minimum 24 kg/m^3 polyurethane polymer density. 120 N(±13 N) IFD (25 percent deflection) required.

All foam shall have a minimum recovery ratio of 70% when tested as specified in 4.4.5 and meet flame retardant requirements in 3.2. Flame retardant additives are permitted. Minimum 25 mm thick layers of foam may be securely bonded together to make a thicker pad. Buff edges/corners when necessary to achieve specified final appearance and provide a smooth fitting cover.

3.2.5 Sewing and quilting twine. Minimum breaking strength 49 N. when tested as specified in 4.4.3.

3.2.6 Welts. Flammability requirement: See par. 3.2.

3.2.6.1 Seam welts. Welts shall be of fabric (3.2.1) uniformly drawn over a suitable 4 mm minimum core.

3.2.6.2 Bumper welts. Fabric (3.2.1) uniformly drawn over a resilient 8 mm minimum core.

3.2.6.3 Double bumper welt. Consists of a double welt of fabric (3.2.1) over a hard cord core. It shall be stapled to the chair in between the welts. The staples shall not be visible in between the welts. The double welt shall not be over 14 mm wide and shall be sewn with no cut stitches.

3.2.7 Spring system. Any coil or sinuous wire steel spring system is acceptable provided it gives a moderately firm, resilient, comfortable seat and back which does not bottom out and meets all applicable test requirements. Acceptability of ride, firmness, and comfort will be determined during bid sample evaluation. Squeaks or other noise is not acceptable. When springs are hand-tied, twine must be knotted to springs.

3.3 Hardware.

3.3.1 Glides. Glides shall be of the rubber cushioned, stainless steel, nail type, with maximum diameter permitted by the leg.

3.3.2 Casters. Casters shall be dual wheel, hard carpet, hooded type with black wheels and a bronze or oxidized copper hood.
Wheel diameter: 51 mm min. on Type II, Class 2, Style A Secretarial chair
57 mm min. on all other chairs.

3.3.3 Rotary mechanisms. All Type II rotary chairs shall have a suitable metal rotary mechanism with pure nylon or metal inserts having four contact points to the underside frame of the seat, a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

spring tension adjustment for back tilt and a minimum 51 mm height adjustment range. Mechanism shall also have a positive stop to prevent the seat from going over backwards should there by any failure of the tilt mechanism.

All posture chairs shall have in addition to the above requirements a positive adjustment for height of back independent of the seat and an adjustment for pitch of the back.

The material used shall be free from rough surfaces, rust, and other defects which may affect the safety of the user, the durability, serviceability, or appearance of the finish mechanisms. Adjustment for tilting shall be by means of a suitable hand wheel conveniently located at the front of the chair swivel and tilt mechanism. Adjustment for raising shall be by means of a suitable hand wheel located concentrically on the pivotal axis of the chair and shall be self-locking and permit swiveling. All rotary mechanisms shall have a positive stop in uppermost position to prevent seat from accidentally disengaging from base. Securely attach rotary mechanism to chair frame or seat pan as applicable.

3.3.4. Scuff plates. Rotary chairs shall have moulded high impact plastic, black or dark brown scuff plates. Design shall be as shown in the figures. Plates shall be securely attached.

3.4 Construction. Construct chair frames of solid hardwood (exposed, unexposed as applicable, see 3.1.1.1). Chairs are required to meet test requirements in 4.5. All straight chairs shall be furnished with glides (3.3.1) and all "star" base chairs with casters (3.3.2), and scuff plates (3.3.4).

3.4.1 Design. The design of the chairs shall be contemporary, either straight (leg) rotary type, with "star" base or jury base as specified (see 1.2.1 and 6.2). They shall have upholstered seats and backs with exposed wood frames and shall conform to the designs shown in Figures 1 through 10.

3.4.2 Tolerances. Overall width, depth, height: ± 13 mm .

Dimensions of any wood part - plus 3 mm, minus 1.5 mm.

Angular measurements - plus or minus 1 degree.

3.4.3 Joining and assembly. Joining and assembly of all component parts shall be in strict accordance with the figures and the details specified herein. All joints shall be carefully fitted, thoroughly glued, and attached with dowels, or screws and bolts. All exposed corners and edges shall be rounded to an approximate 3 mm radius. Corner blocks as wide as practicable shall be carefully fitted, and securely glued and screwed. Steambent arms shall be of one continuous piece of wood. The standard posts of all posture and secretarial chairs shall be attached to the back plate of the rotary mechanism by means of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

one M6 (1/4") bolt (with dark finish), and minimum one No. 12 screw. All exposed screws and boltheads, with the exception of oval head screws for fastening attached backs, shall be countersunk and concealed by carefully matched, flush wood plugs. Grain of plugs shall run in the same direction as piece into which it is fitted.

3.4.4 Bases.

3.4.4.1 "Star" Bases. The bases of all rotary chairs shall be shaped as shown in the figures and shall consist of four legs which shall be received in a steel hub known as a "dovetail hub" by a continuous dovetail extending the full length of the hub. The dovetail shall be tapered in design so that when the wooden legs are inserted in the hub, they shall fall in part way of their own weight but shall be forced in by pressure the balance of the way. Base assemblies shall be reinforced on the bottom by a steel butterfly plate which shall be attached to the legs by means of eight 38 mm no. 12 screws (two screws to each base leg). Top shall likewise be fastened by four of the same screws (one screw to each base leg). Part rounded wood filler blocks shall be recessed into the legs to conceal the hub and shall be glued on one side only. Top of base legs shall be parallel to the floor 6 mm (± 3 mm) from outside edge of the hub flange.

3.4.4.2 Jury Base. The base and chair rotating and tilting mechanism for the jury base chair shall be Collier-Keyworth Model No. 515 or equal. Self-centering device attached to base shall return chair to starting position. The total height of the base and chair control mechanism shall be approximately 355 mm. All surfaces shall be thoroughly cleaned of grease or foreign matter and receive a prime coat and not less than one coat of baked enamel, color, (without graining) to match the color of wood, as specified in purchase order.

3.4.5 Attached chair back. Back consists of curved plywood (3.1.1.3) with exposed wood veneer on back face, 25 mm thick polyurethane foam (3.2.4), filler material (3.2.2), and flat nylon (3.2.1) upholstery cover. Double bumper welt (3.2.6.3) required around the perimeter of the back.

3.4.6 Type I, Class 1, straight arm chair.

3.4.6.1 Chair frame . See figure 1.

3.4.6.2 Back . The attached back (3.4.5) shall be mounted to the back extension and steambent rim by three, M6 (1/4-20) oval head bolts and tee nuts. Firm density rubber or black plastic washers, a minimum of 3 mm by 16 mm, shall separate the back from rim.

The plywood back shall be 430 x 225 mm before upholstering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.6.3 Upholstered seat. The seat shall be of plywood, (3.1.1.3) and formed to a 685 mm radius bend with the back line of the seat sawn and shaped to a 380 mm radius. Vent holes required. Radius edges and corners of seat panel. The plywood seat shall be upholstered with a minimum of 51 mm polyurethane foam (3.2.4), bonded to seat pan. The polyurethane foam shall be covered with a filler material (3.2.2) extending over the sides of the foam at least 25 mm on all sides and shall cushion edges of seat pan. Seat top and boxing shall be of fabric (3.2.1). Welt (3.2.6.1) required at top and bottom edges of boxing. Cover bottom of seat with cambric. Final upholstered seat shall have an outline similar to the plywood form.

3.4.7 Type I, Class 1A, closed back conference chair with arms.

3.4.7.1 Chair frame. See figures 2, 3, and 4.

3.4.7.2 Back frame. See figure 2.

3.4.7.3 Upholstered seat. Seat consists of the following:

Seat pan - Min. 5 ply plywood (3.1.1.3). Vent holes required. dia. vent holes required.

Layer 1 - Minimum 76 mm of polyurethane foam (3.2.4) bonded to seat pan.

Layer 2 - One layer of filler material (3.2.2). Cut filler material so it extends one over each edge of polyurethane.

Layer 3 - Upholstery cover. Seat top and boxing are fabric (3.2.1). Seam welts (3.2.6.1) required between boxing and top fabric and around bottom edge of boxing. Securely sew cover together and securely attach cover to bottom of seat pan. Cover bottom of seat pan with cambric.

3.4.7.4 Back upholstery. Fill inside back with min. 25 mm of polyurethane foam (3.2.4) and filler materials (3.2.2) over a durable foundation to provide a comfortable, resilient back which conforms to figures. Cover outside of back with filler materials (3.2.2) to fill cavity and cushion all frame members. Cover inside and outside back with fabric (3.2.1). Seam welt (3.2.6.1) required as shown in figures.

3.4.8 Type I, Class 2, straight, armless chair.

3.4.8.1 Chair frame. See figure 5.

3.4.8.2 Back. The attached back (3.4.5) shall be mounted with three No. 12 oval head screws, one through each post and one through the top rail. Hard, dark brown or black rubber or plastic washers, a minimum of 6 mm long by 16 mm diameter shall separate the back from the chair frame at the mounting points. The plywood back shall be 405 x 190 mm before upholstering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.8.3 Upholstered seat. Same upholstery and construction as 3.4.6.3 except for size.

3.4.9 Type II, Class 1, Style A & B. Rotary arm chair, tilting with fixed seat and back.
Style A, Wood "star" base.
Style B, Jury base.

3.4.9.1 Exposed chair frame (Style A & B).
See figure 6.

3.4.9.2 Interior seat frame (Style A & B). Consists of a 57 mm x 57 mm W front rail and 33 mm x 57 mm W side and back rails. Steambend or bandsaw back rail to a 380 mm radius. Double dowel frame together. Glue and screw a 27 mm x 35 mm W x 225 mm L trimmer rail, radiused on back edge, to back rail for mounting chair tilt mechanism. Trimmer rail may be deleted if mechanism is mounted directly to the back rail. Radius all outer edges and corners of frame. Corner blocks required (3.4.3). Some modification to frame is permitted to accommodate various spring systems provided no frame rails are eliminated and rail dimensions are not reduced. When sinuous springs are used, frame dimensions must be sufficient for frame to resist spring tension without deflection.

3.4.9.3 Upholstered seat (Style A & B).
Spring system - 3.2.7.
Edge roll - Machine made, 19 mm minimum, resilient product. Securely attach to four sides of seat frame.

Cover springs with a wire reinforced sheet fabric (3.2.3), minimum 51 mm of polyurethane foam (3.2.4) and resilient filler material (3.2.2). Cushion all frame members.
Cover seat top and boxing with fabric (3.2.1). Roll-over (waterfall) front edge required. Welt (3.2.6.1) required as shown in figure 7. Cover bottom with cambric. Final appearance shall conform to figure 7.

3.4.9.4 Back (Style A & B). Attached back (3.4.5) shall be mounted to the back extension and steambent rim by three M6 (1/4 - 20) oval head bolts and tee nuts. Firm density rubber or black plastic (min. 3 x 16 mm) washers, shall separate back from rim.

Plywood back, 430 x 225 mm before upholstering.

3.4.9.5 Rotary mechanism (Style A & B). See 3.3.3.

3.4.9.6 "Star" base (Style A). See 3.4.4.1.

3.4.9.7 Jury base (Style B). See 3.4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.10 Type II, Class 1, Style C. rotary posture chair (890 mm) with arms.

3.4.10.1 Arm and stump assembly. See Figure 7.

3.4.10.2 Interior Seat Frame. Same construction as 3.4.9.2 except back rail has an 457 mm radius.

3.4.10.3 Upholstered seat. Same construction as 3.4.9.3.

3.4.10.4 Back frame. Consists of the following components:

Exposed lower back post, 27 mm thick. Shape as shown in figure. Double dowel (11 mm dia.) and screw to inside face of top unexposed back post, minimum 100 mm overlap.
Top unexposed back post, 35 mm thick, tapering from 64 mm W at the bottom to 32 mm W at the top. Bandsaw post to curve as shown in figure. Shape and bevel cut inside face of post to provide a comfortable back.
Top back rail, 22 mm thick. Steambend to a 610 mm radius. Cut curve on top edge, 76 mm W in the middle and 57 mm W at ends. Double dowel rail to top back posts.
Bottom upholstery back rail, 44 mm thick (top to bottom). Bandsaw to a 610 mm radius. 64 mm W at back posts to 57 mm W (front to back) at center of back. Notch rail around lower back post. Double dowel to back posts.
Exposed bottom back rail. 22 mm thick (front to back) x 52 mm W. Steambent, bandsawed, or laminated or member (exposed wood face veneers, all plies same direction) with 915 mm radius required. Cut 13 mm radius on bottom back edge. Double dowel to back posts. Securely glue a 11 x 35 mm W exposed wood trim rail to top edge. Cut rear edge of trim rail to conform to radius of bottom back rail.

Securely attach back plate of chair control to back posts with dark finished carriage bolt and screw.

3.4.10.5 Back upholstery. Same foundation, padding, filler materials, and upholstery cover requirements as 3.4.7.4. Increase thickness of padding/filler materials if necessary to achieve final appearance shown in figure 7.

3.4.10.6 Rotary mechanism. See 3.3.3.

3.4.10.7 "Star" base. See 3.4.4.1.

3.4.11 Type II, Class 1, Style D, rotary posture chair (945 mm H), with arms. Design and dimensions must comply with figure 8.

3.4.11.1 Arm and stump assembly. See figure 8.

3.4.11.2 Interior seat frame. Consists of the following:
Front rail - 44 x 59 mm W. Full width cleat required for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

attaching upholstery.
Side rails - 27 x 59 mm W.
Back rail - 35 x 59 mm W steambent to a 610 mm radius.

Double dowel (11 mm dia.) frame together. Shape a 25 to 32 mm radius on front corners to seat frame. Corner blocks (3.4.3) required. Some modification to frame is permitted to accommodate various spring systems provided no frame rails are eliminated and rail dimensions are not reduced. When sinuous springs are used, frame dimensions must be sufficient for frame to resist spring tension without deflection.

3.4.11.3 Upholstered seat.
Spring system - 3.2.7.
Edge roll - Machine made, 19 mm minimum resilient product. Securely attach to four sides of seat frame.
Cover springs with a wire reinforced sheet fabric (3.2.3), minimum 51 mm of polyurethane foam (3.2.4) and resilient filler material.
Cover seat top and upper and lower boxing with fabric (3.2.1). Upholster seat to appear as a separate attached cushion. See figure 8. "Water fall" (rolled) front and back edges are required.
Apply seam welts (3.2.6.1) around cushion side boxing.
Apply bumper welt (3.2.6.2) around front perimeter of bottom edge of frame boxing.
Cover bottom of frame with cambric.

3.4.11.4 Back frame. Consists of the following components:
Exposed lower back post, 30 mm thick. Shape as shown in figure. Double dowel (11 mm dia.) and screw to inside face of top unexposed back post, minimum 100 mm overlap.
Top unexposed back post, 21 mm thick at bottom, tapering to 35 mm thick at the top. 44 mm W at the bottom tapering to 32 mm W at the top. Bandsaw post to curve as shown in figure. Shape and bevel cut inside face of post to provide a comfortable back.
Top back rail, 22 mm thick. Steambend to a 915 mm radius. Cut curve on top edge, 76 mm W in the middle and 70 mm W at ends. Triple dowel rail to top back posts.
Button anchor rail is required.
Bottom upholstery back rail, 44 mm thick (front to back) x 51 mm W. Bandsaw to a 915 mm radius. Double dowel to back posts.
Exposed bottom back rail, 22 mm thick (front to back) x 64 mm W. Steambent, bandsawed or laminated member (walnut face veneers, all plies same direction) with 915 mm radius bend required. Cut 13 mm radius on bottom back edge. Double dowel to back posts. Securely glue a 11 x 41 mm W exposed wood trim rail to top edge. Cut rear edge off trim rail to conform to radius of bottom back rail.
Some modification to frame is permitted to accommodate various spring systems provided no frame rails are eliminated and rail dimensions are not reduced. When sinuous springs are used, frame dimensions must be sufficient for frame to resist spring tension without deflection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.11.5 Back upholstery.
Spring system - 3.2.7 required on inside back.
Cover springs with sheet fabric (3.2.3), minimum 25 mm of polyurethane foam (3.2.4), and resilient filler material (3.2.2). Cover outside of back with filler materials (3.2.2) over a suitable foundation. Cushion all frame members. Cover inside and outside back with fabric (3.2.1). Button tufting and seam welts (3.2.6.1) required as shown in figure 8.

3.4.11.6 Rotary mechanism. See 3.3.3. Attach back plate of mechanism to each back post with M6 (1/4-20) bolt and two No. 12 screws.

3.4.11.7 "Star" base. See 3.4.4.1.

3.4.12 Type II, Class 1, Style E, rotary high back chair, tilting with fixed seat and back. Design and dimensions must comply with figure 9.

3.4.12.1 Arm and stump assembly. See figure 9.

3.4.12.2 Interior chair frame.
Seat frame.
Front rail - 44 x 59 mm W. Cleat or rabbet permitted for attaching upholstery.
Side rails - 27 x 59 mm W.
Double dowel (11 mm dia.) frame together.
Shape a 25 to 32 mm radius on front corners of seat frame.
Corner blocks (3.4.3) required.

Back frame.
Back uprights, 27 mm thick x 76 mm W at bottom, tapered to 35 mm W at top.
Top back rail, 22 x 57 mm W. Steambend to a 915 mm radius.
Two lumbar anchor rails required.
Bottom upholstery rail, 22 x 60 mm W.
Bottom back rail, 25 x 60 mm W.
Double dowel back frame together.

Some modification to frames are permitted to accommodate various spring systems provided no frame rails are eliminated and rail dimensions are not reduced. When sinuous springs are used, frame dimensions must be sufficient for frame to resist spring tension without deflection.

3.4.12.3 Upholstered seat. Same spring foundation, padding, filler materials, and upholstery cover requirements as 3.4.11.3 except without rolled back edge. See figure 9.

3.4.12.4 Upholstered back. Same spring foundation, padding, filler materials, and upholstery cover requirements as 3.4.11.5 except a lower padded lumbar support area is required. See figure 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.12.5 Rotary mechanism. See 3.3.3.

3.4.12.6 Star base. See 3.4.4.1.

3.4.13 Type II, Class 2, Style A, rotary secretarial chair without arms. Design and dimensions must comply with figure 10.

3.4.13.1 Upholstered seat. Same upholstery and construction as 3.4.6.3 except for size and "waterfall" (rolled) front and back edges which are required. Attach plywood seat to rotary mechanism with M6 (1/4-20) bolts and T - nuts.

3.4.13.2 Back assembly.
Back posts, shape and dimension as shown in figure 10.
Top back rail, 22 x 64 mm W, steambent, bandsawed or laminated member (walnut face veneers, all plies same direction) with 380 mm radius required. Finish veneers to match exposed surfaces. Double dowel to posts.

Mount attached back (3.4.5) to back posts with dark finished side hinges. Plywood back dimensions before upholstering, 405 x 190 mm.

3.4.13.3 Rotary mechanism. See 3.3.3.

3.4.13.4 "Star" base. See 3.4.4.

3.5 Padding, filling and Upholstery. Minimum padding and filling requirements are described in construction paragraphs. Additional padding and filling may be necessary to ensure the appearance and cushion dimensions comply with figures, with no hollows, voids, flat or hard spots. Pad all frame members, and edges of plywood seats. Covers shall be carefully tailored and so applied that they are neat and tight, free from wrinkles and bulges. Final appearance of chair shall be symmetrical. The type and number of stitches shall be sufficient to provide the required appearance and pass all chair test requirements. Seam allowance shall be maintained and seams properly sewn so that no raw edges, runoffs, broken or skipped stitches, twists, pleats or puckers result. Top and bottom threads shall be adjusted to the upholstery materials with proper tension so there will be no looped stitches, puckering of materials, or cracking when cover is stretched to fit the chair. Welts shall lie straight and uniform. Covers for all chairs shall be attached with tacks or staples. All chair seat bottoms shall be covered with cambric.

3.6 Exposed wood finish. Finish to match as closely as possible the overall color of GSA Standard Sample FSS-L-01002 walnut and be stained to equalize color. Semi-open pore finish with minimum two natural or synthetic top coats with adequate "build" is required. Finish shall be smooth with no bumps, grit or other defects. A 32° to 47° final dry sheen is required. Final finish shall pass finish test (4.4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

GSA Standard Samples are available from GSA-FSS-3FNEW-CO, Furniture Center, Engineering Division, Washington, DC 20406.

3.7 Identification marking. Each item shall be permanently and legibly marked with contrasting ink, on the underside of chair seat, with the specification number, national stock number, contract number, month and year of manufacture and manufacturer's name or trademark.

3.8 Workmanship. A high degree of craftsmanship shall be exercised in order to produce chairs suitable for use in executive offices. The methods of construction, assembly, filling, padding, upholstering (see 3.5), finishing and the appearance of the chairs shall be in strict accordance with the requirements of this specification. Chairs shall have a neatly tailored, taut, stuffed appearance complying with applicable figures. Loosely fitted upholstery or uneven padding is not acceptable. Rotary mechanisms shall operate and rotate freely and easily without turning the base and be free from play or wobble. Casters shall rotate smoothly and be attached to prevent accidental removal. All moving parts shall operate smoothly and quietly. All wood surfaces not covered with upholstery materials, shall be finish sanded smooth and all corners and edges eased, thoroughly cleaned, and finished. The natural grain of the wood shall not be clouded by the finishing materials. Bleaching agents or materials shall not be used. The application of materials, drying time, sanding, cleaning, and rubbing shall be controlled to produce items with smooth, uniform exposed surfaces without blisters, pits, wrinkles, runs, tackiness or more than a trace of orange peel.

4. QUALITY ASSURANCE PROVISIONS

4.1 First article inspection and testing. The first article samples shall be inspected and tested as specified herein for all the requirements of this specification. The samples shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production. In addition, first article samples shall be compared to and shall match bid samples for style/design, workmanship, comfort, and finish (except color). Bid sample rejection points (if any) shall be corrected in the first article sample. Manufacturer shall maintain bid samples and first article samples as manufacturing standard samples until the last order is shipped, received and accepted by the ordering activity.

4.2. Production item inspection and testing. During production, items shall be inspected by the contractor in accordance with 4.3. No item shall be shipped unless it fully conforms with all contract requirements. Production items shall also comply with the manufacturing standard samples (4.1). Finish test (d) in 4.4.2 shall be performed once a month on panels from current

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

production during the contract period. On contracts with an option year(s) all other tests, performed on first article samples, shall be rerun on pieces from current production, after the first , second, (etc) years.

4.3 Inspection provisions.

4.3.1 Visual and dimensional examination. Perform examination on a percent defective basis in accordance with MIL-STD-105 and the following sampling plan.

Inspection Level - II. Acceptable Quality Level (AQL) - 4.0

Inspect items for visual and dimensional requirements of this specification paying close attention to filling and upholstery (3.5) and workmanship (3.8).

4.3.1.1 Overall examination. In addition to visual and dimensional examination, inspect each chair at a viewing distance of 2 m for the following defects. Reject the item if one or more of the following defects is found.

Wood finish streaked or not uniform.

Piece visually off level.

Scratch or bruise marks on wood.

Poor fit of upholstery as evidenced by wrinkles, bulges, uneven padding, or other defects.

Welts not straight.

Chair upholstery and filling not symmetrical.

4.3.2 Packaging, packing, marking examination. Examine items for compliance with requirements stated in this document and the contract. Score areas of noncompliance with requirements as defects.

Inspection Level - S-4. Acceptable Quality Level (AQL) - 4.0.

4.4 Testing. Failure to comply with the following test requirements will be cause for rejection. Testing is required for first article inspection. See production item testing requirements in 4.2.

4.4.1 Test for adhesives.

Test for adhesives

Component	Characteristic	Requirement reference	Test Method
Adhesive	Block shear test	3.1.3	ASTM D 905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Rerun test if all three of the following criteria are met: the average shear strength of all samples is below 19 300 kPa; there is a 10 percent or greater difference between high and low specimen values, and at least one test specimen broke at more than 19 300 kPa.

Disregard a test specimen in computing the average if it breaks at less than 19 300 kPa; and it has 50 percent or more wood failure.

4.4.2 Finish tests and requirements. The following tests (except UV test) shall be performed on a sample panel finished in the same manner as units are finished in production.

Perform all finish tests at first article inspection. All test panels shall be produced from finish materials currently being used in production. All samples tested shall meet the following test requirements.

(a) Cold check. Age panel one week. Follow ASTM D 1211 test procedure. After exposure of 10 cycles, there shall be no checking or cracking. True film checking is one or more wavy or straight lines which cross the grain and do not appear related to grain structure. When a panel displays veneer checks, check running parallel to the grain, or glue line fracture, the panel shall be disregarded and another panel tested.

(b) Cold print. Age panel 48 hours. A 50 x 50 mm (approx.) piece of duck material (canvas) 280 g/m^2, minimum count of 23.6 x 22.8 yarns per cm, shall be placed on the panel. Place a 455 g weight on the material for 24 hours at 24 degrees C. Bottom (contact surface) of the weight shall be flat and have a 28 mm diameter. After the weight is removed, light polishing with a soft cloth and liquid polish must remove any imprint.

(c) Ultra violet light resistance. Spray one-half of a 150 mm x 230 mm white porcelain panel with two coats of the lacquer to be tested. Allow panel to air dry for at least 18 hours. Place panel 305 mm from a carbon arc lamp enclosed by a Corex D glass globe, and expose for 24 hours. After exposure, spray the other half of the panel in the same manner and allow to dry for at least 4 hours. Compare the two finishes. There shall be no more than a slight darkening of the arc lamp exposed film when checked under cool white fluorescent light.

(d) Toughness and adhesion. Perform test for toughness and adhesion on a sample panel finished in the same manner as the furniture using Organic Coating Adhesion Tester, Model No, 1001 in accordance with manufacturer's instructions. Mar the panel both parallel and perpendicular to the grain. Film must conform to resulting indentation. Whitening (film separation) or cracking is not acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Organic Coating Adhesion Tester Model No. 1001 is available from U.S. Testing Company, Inc. Instrument Marking Division, 1415 Park Avenue, Hoboken, NJ 07030.

4.4.3 Test method for determining weight of material per square area. 5041 of Fed. Test Method Std. 191 or ASTM D-3776. See test requirements in 3.2.1, and 3.2.3.

4.4.4 Test method for determining breaking strength of twine. 4100 of Fed. Test Method Std. 191 or ASTM D-1233, or D-2256. See test requirements in 3.2.5.

4.4.5 Test method for determining recovery ratio of polyurethane foam. ASTM D-3770. Recovery ratio. Use this test method for both conventional and high resilience type foam. See test requirement in 3.2.4.

4.5 Tests for chairs. Test at least one chair of each type and style in accordance with ANSI X5.1-1985 General Purpose Office Chairs - Tests at time of First Article Inspection.

Test Schedule

Section	Type I Class 1,1A	Type I Class 2	Type II Class 1 Style A,B,E	Type II Class 1 Style C,D	Type II Class 2 Style A
5			*		
6				*	*
7	*	*			
8			* 1/	*	*
9	*	*	*	*	*
10			*	*	*
11			*		
12	*	*	*	*	*
13	*	*	* 1/	*	*
14	*		*	*	
15	*		*	*	
16			*		
17	*	*		*	*
18			* 1/	*	*
19	*	*			
20	*	*			

1/ Test not applicable to Type II, Class 1, Style B jury base chair. Perform remaining tests on jury base chair with base attached to floor.

5. PACKAGING, PACKING, MARKING

Package, pack and mark shipping containers in accordance with the contract or order.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

6.1 Intended use. Unitized chairs were designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies. The chairs should compliment the decor of executive areas when used with other furniture items within this group.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, style, and class (see 1.2.1).
(c) Upholstery color required (see 3.2.1).

6.3 SI - English unit equivalents.

1 m^2 (square meter)	= 1.19617 $yard^2$
1 kg/m^3 (kilogram/cubic meter)	= 0.06242 lb.(mass)/ft^3
1 mm(millimeter)	= 0.03937 inch (thickness of one dime)
1 m(meter) = 1 000 mm	= 1.0936 yard (39.37 in)
1 N(Newton)	= 0.225 lb. (force)
1 kg(kilogram)	= 2.2 lb.(mass)
1 g(gram)	= 0.0022 lb. (mass)
1 g(gram)	= 0.03527 oz.(mass avoirdupois)
1 kPa(kilo Pascal)	= 0.14514 lb(force)/in^2 (PSI)
(C^o $x_2$9/5) + 32 (Celsius)	= F^o (Fahrenheit)
1 g/m^2 (gram per square meter)	= 0.02949 oz/yd^2 or 0.04426 oz/linear yard (54" W basis)

To convert SI units to English units, multiply SI measurement by the appropriate English conversion factor listed above. See example below:


900 mm X 0.03937 in./mm = 35.43 inches

To convert Celsius temperature to Fahrenheit temperature use the above conversion equation. See example below:


(20^oC X 1.8) + 32 = 68^oF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ALL DIMENSIONS IN MILLIMETERS (mm)

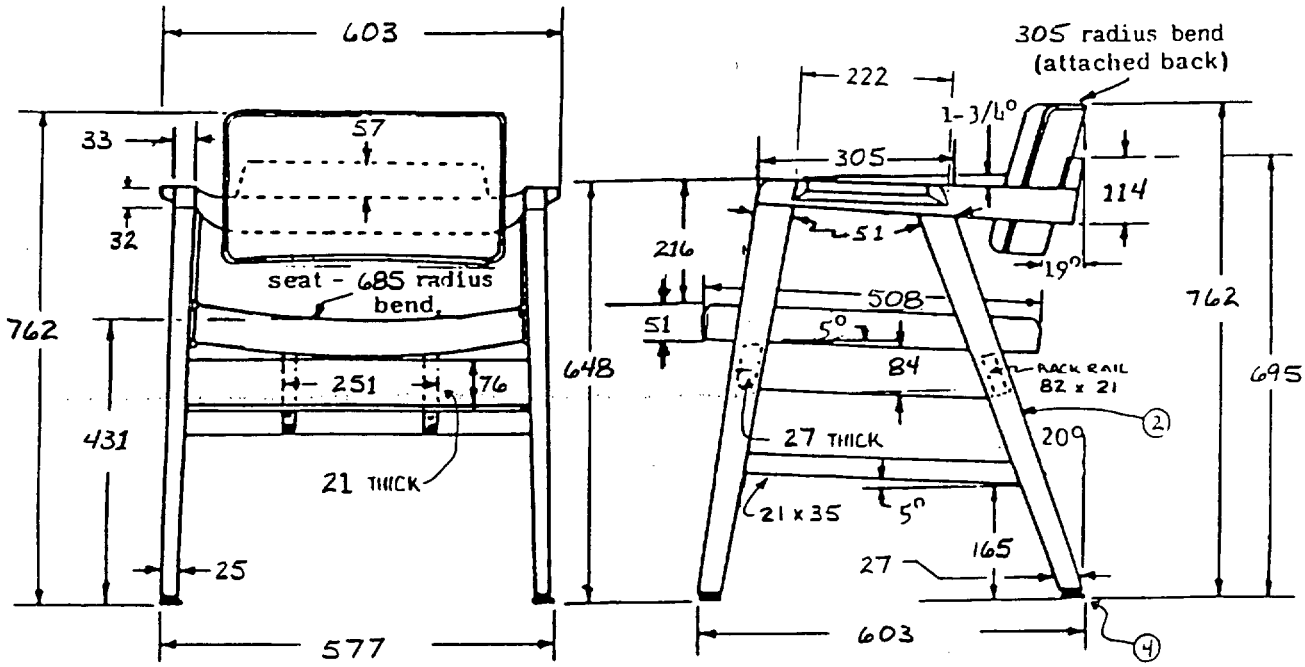

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

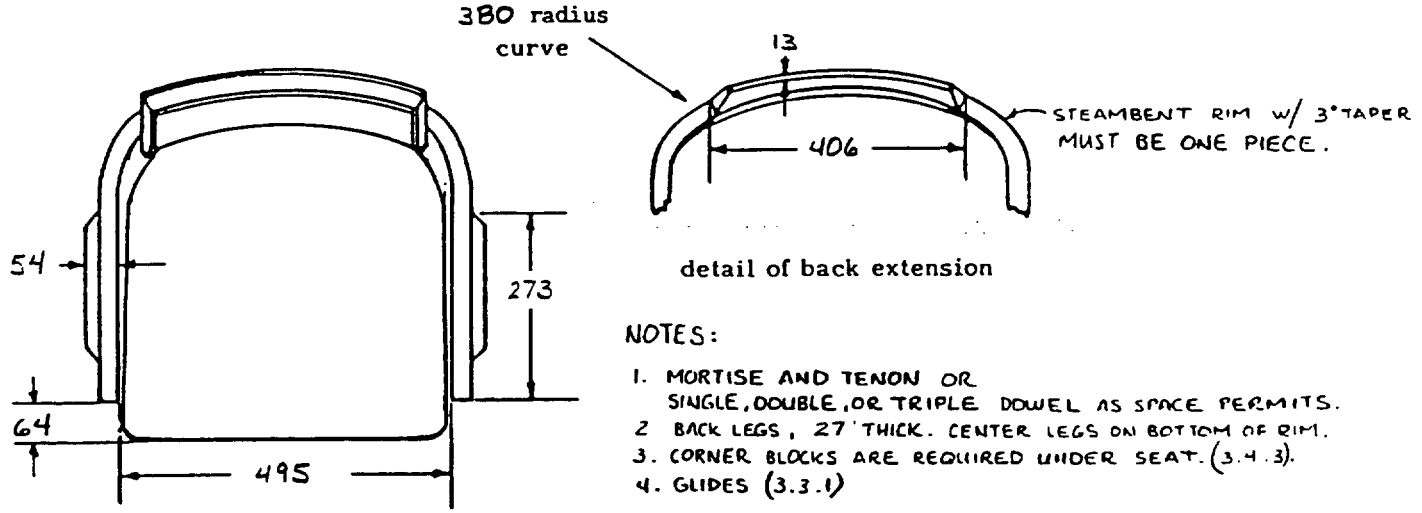

detail of back extension


NOTES:

1. MORTISE AND TENON OR SINGLE, DOUBLE, OR TRIPLE DOWEL AS SPACE PERMITS.
2. BACK LEGS, 27 THICK. CENTER LEGS ON BOTTOM OF RIM.
3. CORNER BLOCKS ARE REQUIRED UNDER SEAT. (3.4.3).
4. GLIDES (3.3.1)

TYPE I, CLASS 1 STRAIGHT CHAIR W/ ARMS

FIGURE 1 ALL DIMENSIONS ARE IN MILLIMETERS (mm)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

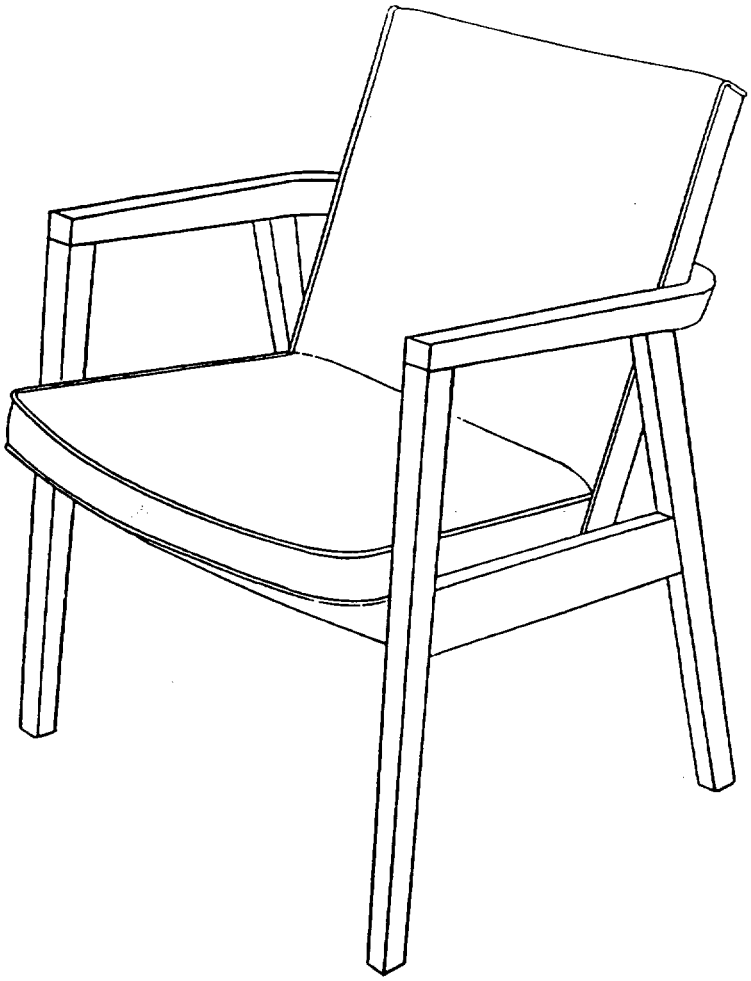

TYPE I, CLASS IA, STRAIGHT CHAIR, W/ARMS
CLOSED BACK

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

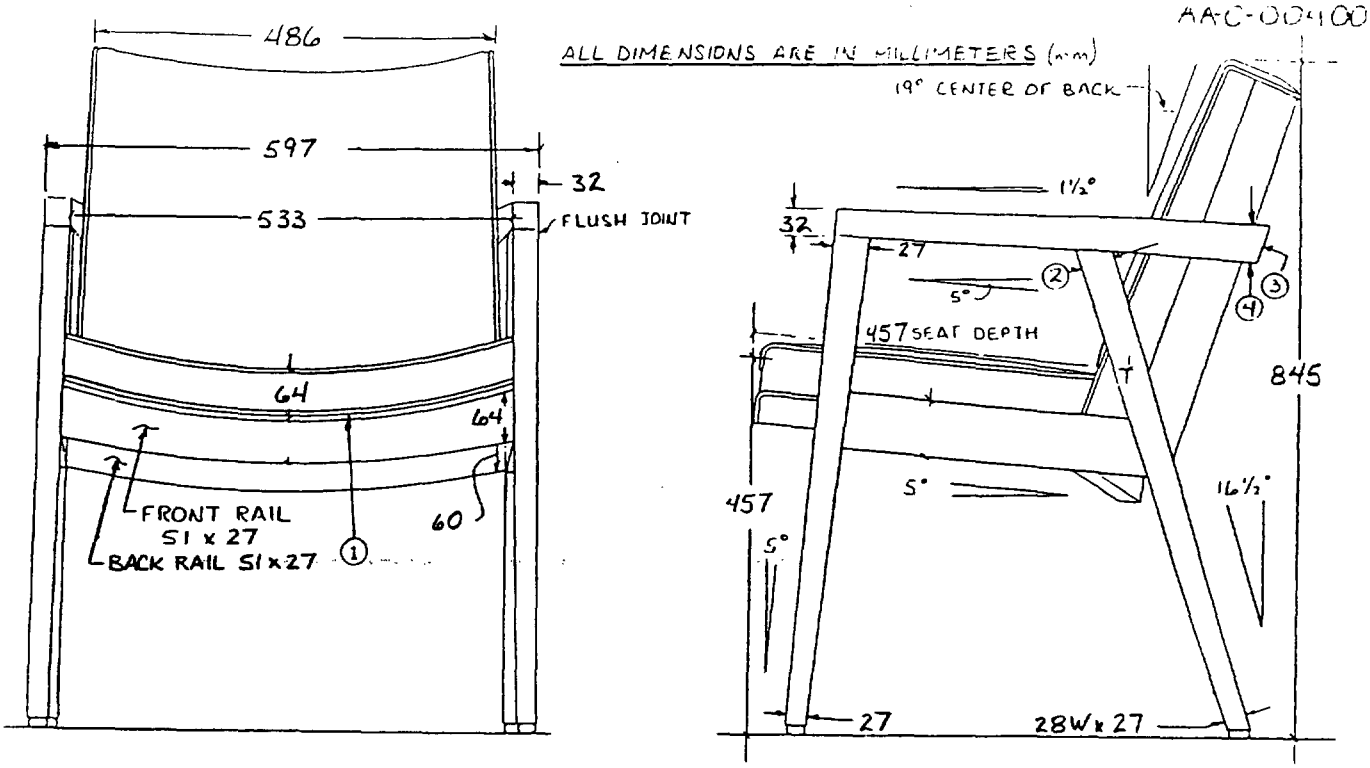

ALL DIMENSIONS ARE IN MILLIMETERS (mm)


NOTES:

1. PLYWOOD SEAT PAN WITH 914 mm R. CUT REAR EDGE OF SEAT PAN TO A 533 mm R.
2. 46 mm W x 27 mm THICK.
3. 16 mm THICK AT CENTER OF BEND.
4. 44 mm W AT CENTER OF BEND.
5. TAPER FRONT LEGS ON FOUR SIDES.
6. TAPER REAR LEGS ON TWO SIDES.
7. RIM MADE UP OF ONE PIECE STEAMBENT SOLID WOOD.
8. MORTISE AND TENON OR SINGLE, DOUBLE, OR TRIPLE DOWEL AS SPACE PERMITS.
9. FRONT AND SIDE RAILS ARE FLUSH WITH INSIDE FACE OF LEGS.
10. RADIUS ALL EXPOSED CORNERS AND EDGES APPROX. 3 mm.
11. CORNER BLOCKS, GLUED AND SCREWED, (4 SCREWS EACH) REQUIRED AT EACH CORNER OF SEAT FRAME. FINISH CORNER BLOCKS WALNUT COLOR. SEE 3.4.3.
12. CENTER REAR LEGS SIDE TO SIDE WHERE THEY JOIN RIM.
13. TOLERANCE ON ANGULAR MEASUREMENTS ± ½°.
14. SECURELY SCREW UPHOLSTERED SEAT AND BACK TO CHAIR FRAME. DARK FINISH REQ'D ON EXPOSED EXPOSED SCREW HEADS.
15. GLIDES (3.3.1) REQ'D.

TYPE I, CLASS 1A, STRAIGHT CHAIR, W/ARMS, CLOSED BACK

FIGURE 3 ALL DIMENSIONS ARE IN MILLIMETERS (mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

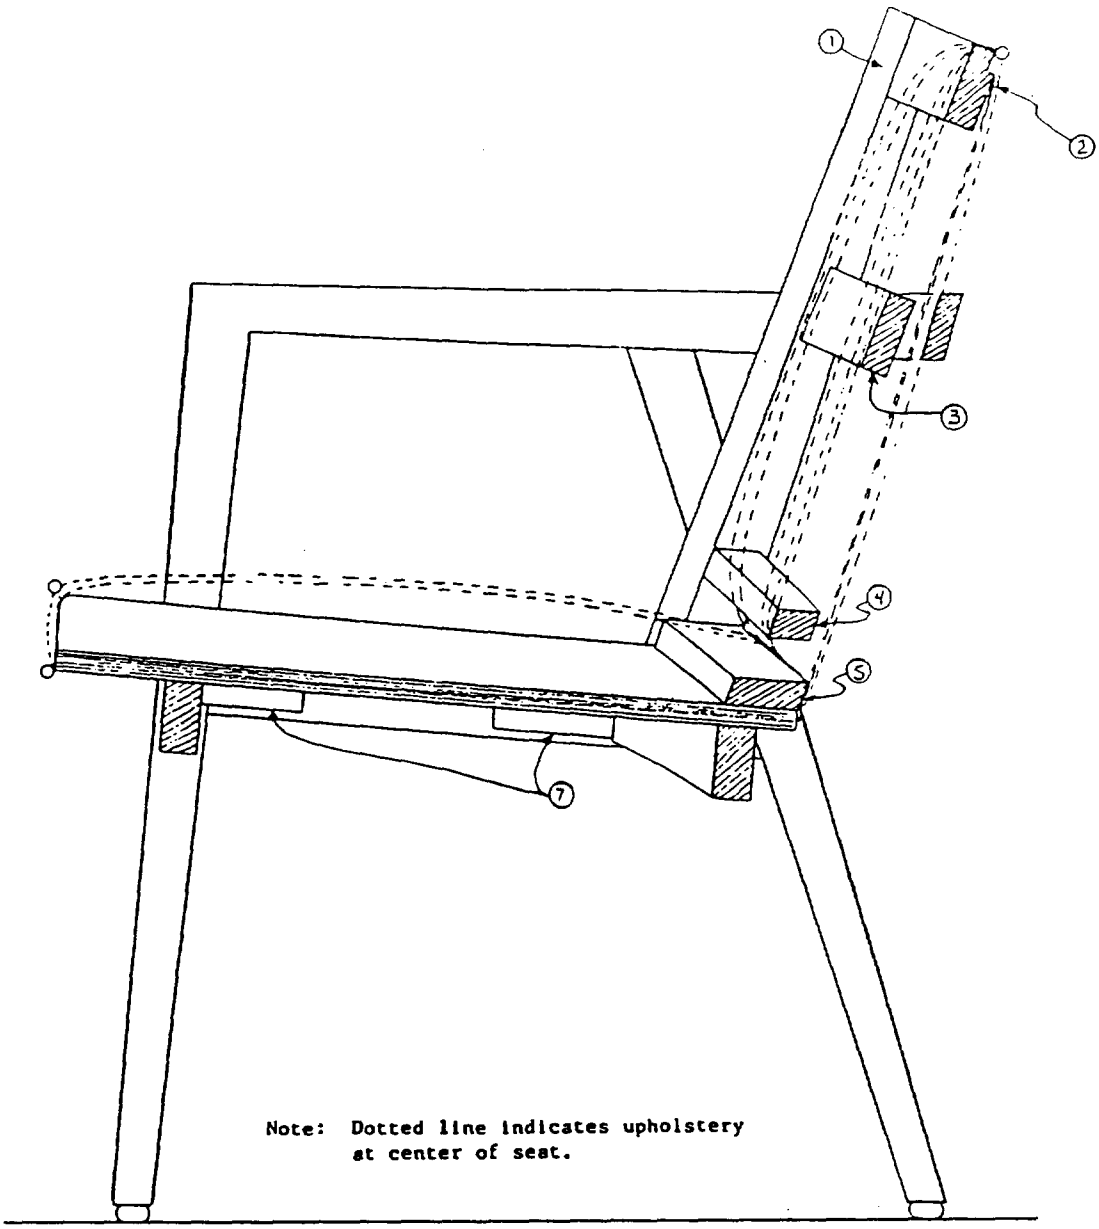



NOTES:
1. BACK POST (2) 35 mm THICK X 73 mm W AT SEAT TAPERING TO 35 mm THICK X 41 mm W AT TOP.
2. TOP SLAT (RAIL) 29 mm THICK X 57 mm W. STEAMBEND TO A 533 mm RADIUS. RABBET TOP REAR EDGE FOR UPHOLSTERY MATERIAL.
3. MIDDLE SLAT RAIL 21 mm THICK X 57 mm W STEAMBEND TO A 533 mm RADIUS.
4. UPHOLSTERY SLAT (RAIL) 21 mm THICK MIN. X 32 mm W. STEAMBEND TO A 915 mm RADIUS AND SHAPE REAR EDGE TO A 533 mm RADIUS.
5. SEAT SLAT (RAIL) 21 mm THICK MIN. X 48 mm W. STEAMBEND TO A 915 mm RADIUS AND SHAPE REAR EDGE TO A 533 mm RADIUS.
6. SECURELY SCREW SEAT SLAT TO PLYWOOD SEAT.
7. CORNER BLOCKS (3.4.3) REQUIRED.

TYPE I, CLASS 1A, STRAIGHT CHAIR, W/ARMS
CLOSED BACK
FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

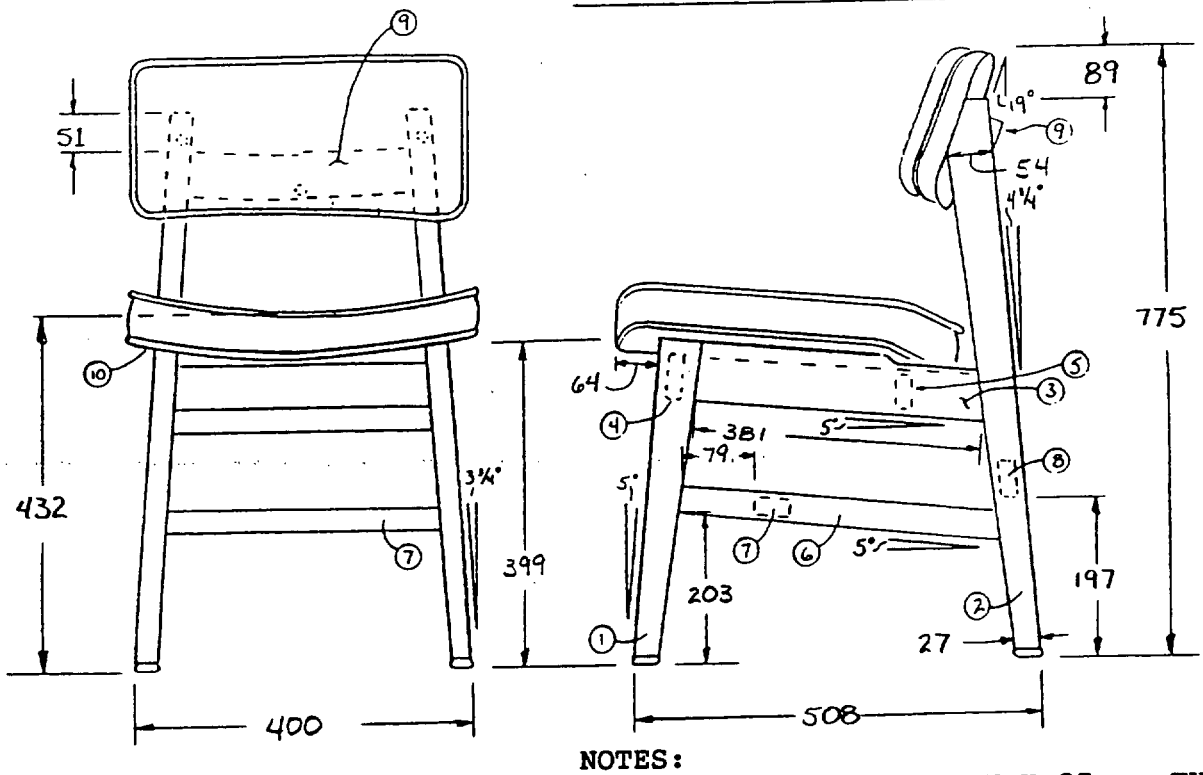

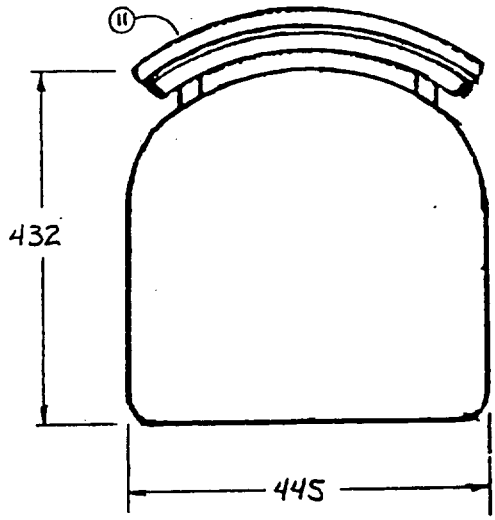

NOTES:


1. FRONT LEGS: 51 mm W X 27 mm THICK(T) AT TOP TAPERING TO 27 mm W X 25 mm T AT BOTTOM. BREAK EDGES OF LEGS AND POSTS TO A 3 mm RADIUS.
2. BACK POSTS: 54 mm W X 27 mm T AT TOP TAPERING TO 27 mm W X 25 mm T AT BOTTOM.
3. SEAT SUPPORT SIDE RAILS: 76 mm W X 21 mm T.
4. FRONT RAIL: 57 mm W X 27 mm T.
5. SEAT BACK RAIL: 54 mm W X 21 mm T.
6. SIDE STRETCHERS: 35 mm X 21 mm T.
7. CROSS STRETCHER: 35 mm X 21 mm T.
8. BACK STRETCHER: 48 mm X 21 mm T.
9. TOP BACK RAIL: 57 mm X 21 mm T. BEND OR BANDSAW TO A 381 mm RADIUS.
10. SEAT PANEL: 686 mm RADIUS. SECURELY SCREW IN POSITION.
11. BACK PANEL: 305 mm RADIUS
12. MORTISE AND TENON OR SINGLE, DOUBLE, OR TRIPLE DOWEL JOINTS REQUIRED AS SPACE PERMITS.
13. CORNER BLOCKS (3.4.3) REQUIRED UNDER SEAT.

ALL DIMENSIONS ARE IN MILLIMETERS (mm)


TYPE I, CLASS 2 STRAIGHT CHAIR
WITHOUT ARMS

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

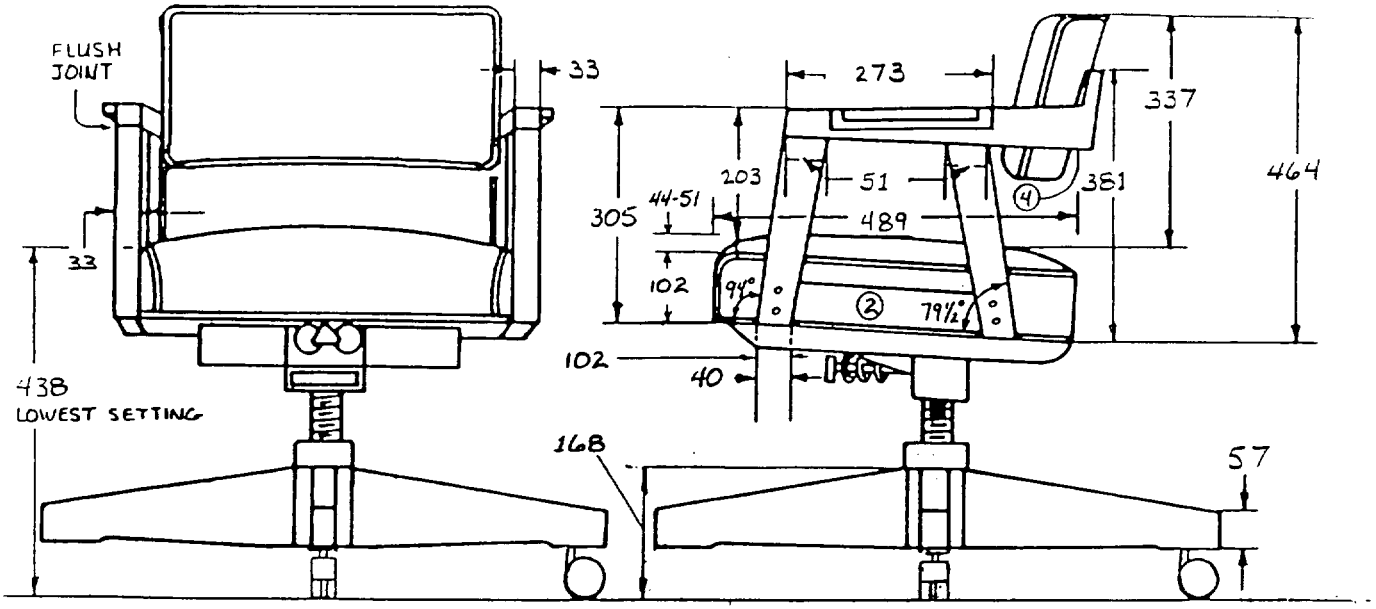

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

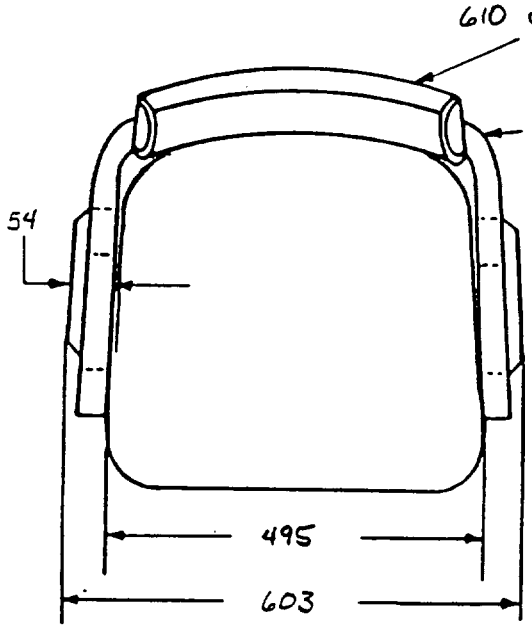


NOTES:

1. CENTER REAR STUMP ON BOTTOM OF BENT RIM.
2. LOWER SIDE HORIZONTAL MEMBER: 57 mm W X 19 mm THICK. JOIN SIDE MEMBER TO STUMPS WITH 5 mm MARGIN ON INSIDE FACE OF STUMPS.
3. JOIN STUMPS TO SEAT FRAME SIDE RAILS WITH ONE M6 (1/4-20)BOLT AND T-NUT AND WITH ONE M6 (No12) SCREW AT EACH JOINT. PLUG SCREW AND BOLT HOLES WITH FLUSH SIDE GRAIN EXPOSED WOOD PLUGS.
4. STEAM BENT RIM WITH 3^{0} TAPER.
5. MORTISE AND TENON OR SINGLE, DOUBLE, OR TRIPLE DOWEL JOINTS REQUIRED AS SPACE PERMITS.
6. CASTERS 57 mm DIAMETER (3.3.2).

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

TYPE II, CLASS 1, STYLE A
ROTARY CHAIR WITH ARMS TILTING W/ FIXED SEAT AND BACK
FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

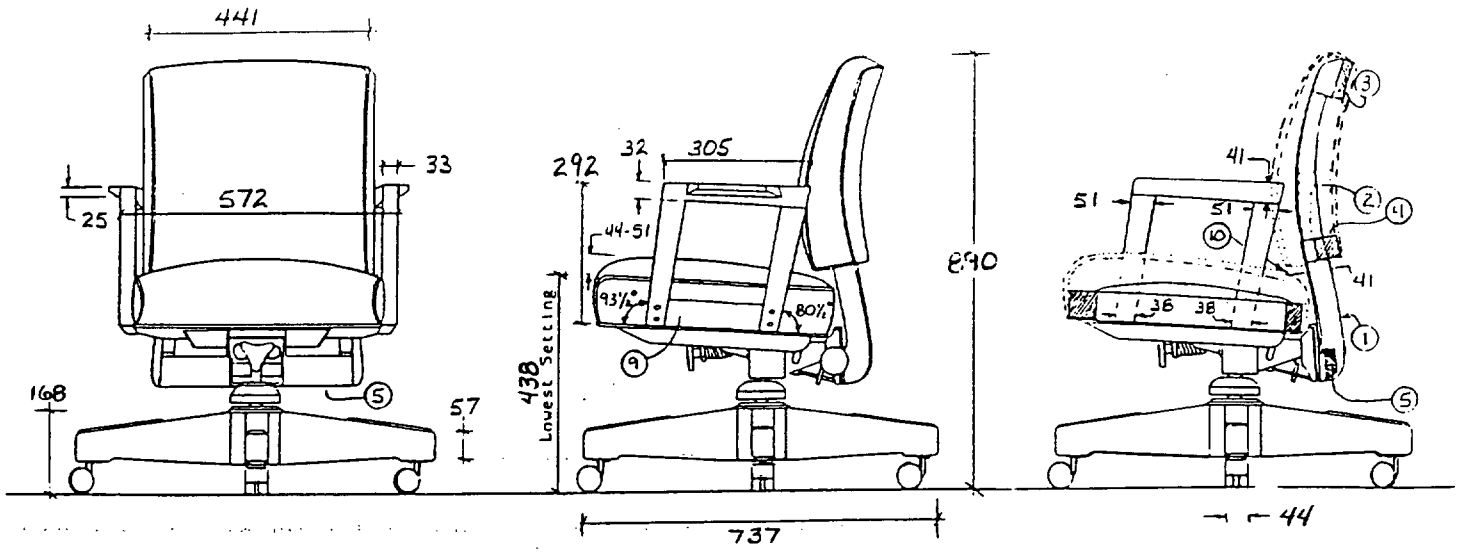



NOTES:
INTERIOR BACK FRAME

1. EXPOSED LOWER BACK POST: 27 mm THICK(T).
2. TOP UNEXPOSED BACK POST: 35 mm T, TAPERING FROM 64 mm W AT THE BOTTOM TO 32 mm W AT THE TOP. SHAPE AND BEVEL CUT INSIDE FACE OF THE TOP BACK POST TO PROVIDE A COMFORTABLE BACK. CURVE POST TO CONFORM TO FIGURE.
3. TOP BACK RAIL 22 mm THICK. STEAM BEND TO 610 mm RADIUS. CUT CURVE ON TOP EDGE, 57 mm W AT ENDS, 76 mm W IN MIDDLE.
4. BOTTOM UPHOLSTERY BACK RAIL, 44 mm T (TOP TO BOTTOM). BANDSAW TO A 610 mm RADIUS. 64 mm W AT BACK POST TO 57 mm AT CENTER OF BACK. NOTCH RAIL AROUND LOWER BACK POST.
5. BOTTOM EXPOSED BACK RAIL, STEAMBENT, LAMINATED OR BANDSAWED MEMBER MADE UP OF EXPOSED VENEERS, ALL PILES IN SAME DIRECTION.


GENERAL NOTES:


6. ATTACH STUMPS TO SEAT FRAME SIDE RAILS WITH ONE M6 (1/4-20) BOLT AND ONE M6 (No. 12) SCREW. PLUG BOLT AND SCREW HOLES WITH FLUSH SIDE GRAIN EXPOSED WOOD PLUGS.
7. CORNER BLOCKS REQUIRED UNDER SEAT (3.4.3).
8. SECURELY MORTISE AND TENON OR SINGLE, DOUBLE, OR TRIPLE DOWEL ALL JOINTS AS SPACE PERMITS.
9. STUMP RAIL: 57 mm X 25 mm TO 33 mm T. CENTER ON ARM STUMPS.
10. WITH BACK IN LOWEST POSITION AND MECHANISM BACK ATTACHMENT PLATE IN VERTICAL POSITION, THE CLEARANCE BETWEEN THE SEAT AND BOTTOM OF THE BACK SHALL BE 22 (± 6) mm.
11. CASTERS-57 mm DIAMETER (3.3.2).

TYPE II, CLASS 1, STYLE C POSTURE, EXECUTIVE,
890 H. FIXED SEAT W/TILTING BACK
FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

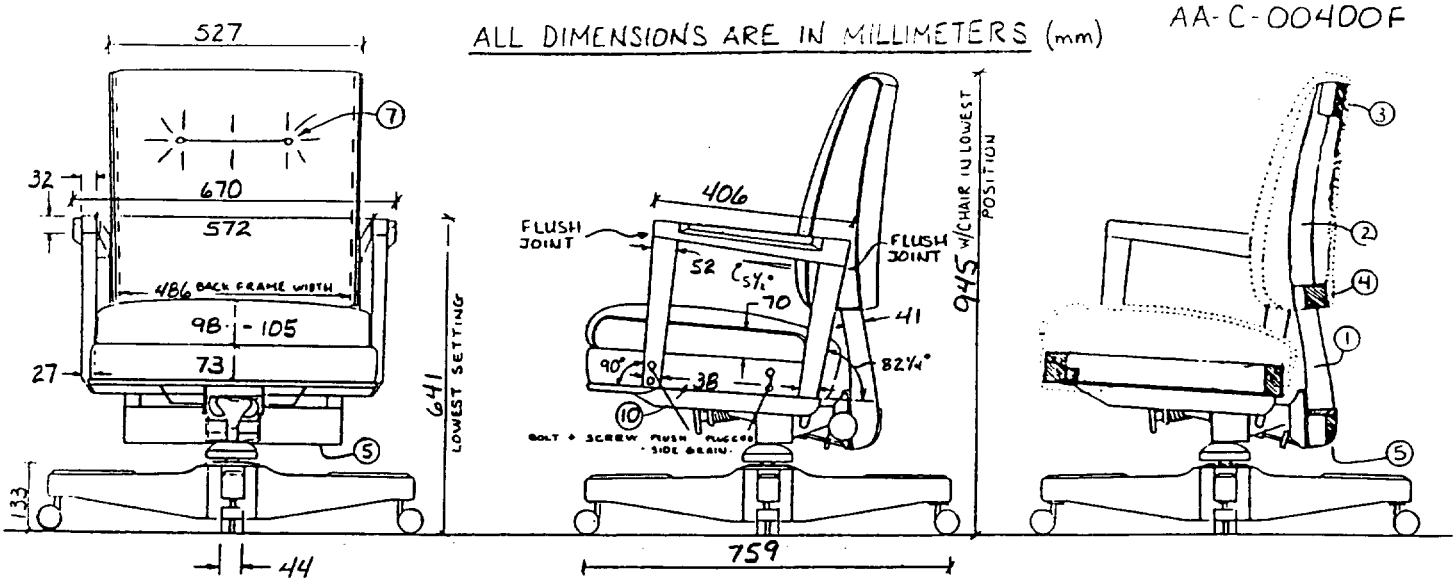

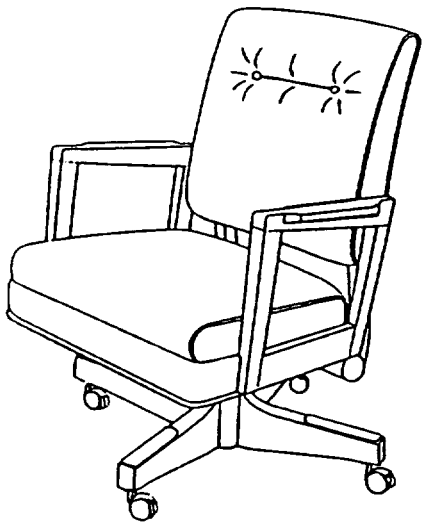

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

NOTES:
INTERIOR BACK FRAME
1. EXPOSED LOWER BACK POST.
2. TOP UNEXPOSED BACK POST.
3. TOP BACK RAIL.
4. BOTTOM UPHOLSTERY BACK RAIL.
5. EXPOSED BOTTOM BACK RAIL.
6. RESERVED


GENERAL NOTES:
7. TUFTING REQUIRED AS SHOWN.
8. CORNER BLOCKS REQUIRED UNDER SEAT (3.4.3).
9. SECURELY MORTISE AND TENON OR SINGLE, DOUBLE, OR TRIPLE DOWEL ALL JOINTS AS SPACE PERMITS.
10. STUMP RAIL MEMBER: 70 mm X 22 mm TO 27 mm T. POSITION FLUSH WITH EXTERIOR SURFACE OF ARM STUMPS. FILLER BLOCKS REQUIRED WHEN STUMP RAIL IS LESS THAN 27 mm T.
11. WITH BACK IN LOWEST POSITION AND MECHANISM BACK ATTACHMENT PLATE IN VERTICAL POSITION, THE CLEARANCE BETWEEN THE SEAT AND BOTTOM OF THE BACK SHALL BE 22 (± 6) mm.
12. CASTERS-57 mm DIAMETER (3.3.2).


TYPE II, CLASS 1, STYLE D POSTURE, EXECUTIVE, 945 H FIXED SEAT WITH TILTING BACK.

FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

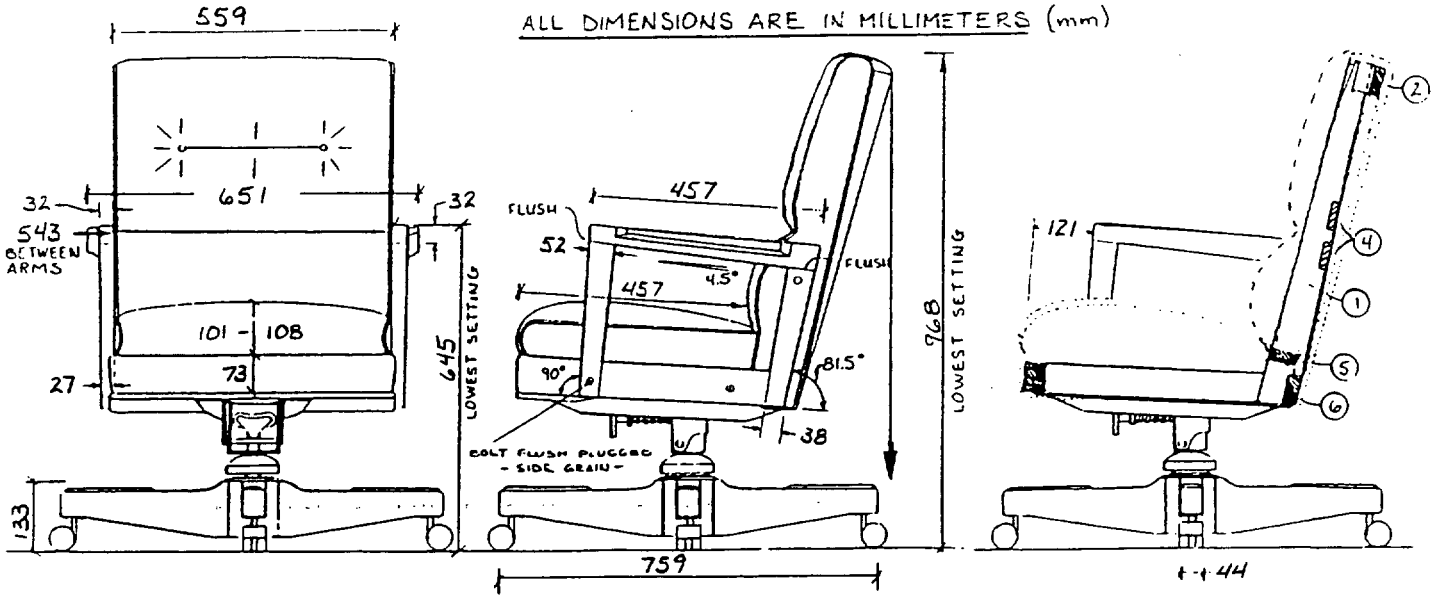

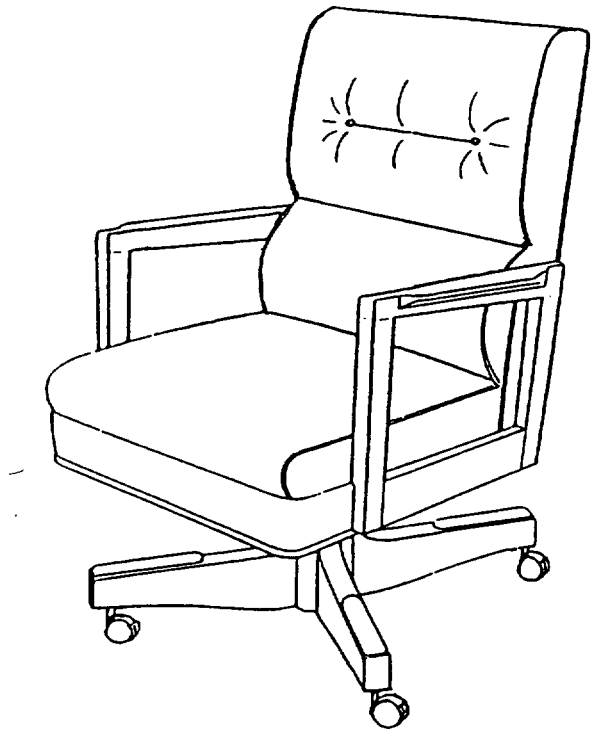

NOTES:
INTERIOR BACK FRAME:
1. BACK UPRIGHTS.
2. TOP BACK RAIL.
3. RESERVED
4. LUMBAR ANCHOR RAILS. (TWO REQUIRED)
5. BOTTOM UPHOLSTERY RAIL.
6. BOTTOM BACK RAIL.

GENERAL NOTES:
7. TUFTING AND LUMBAR SUPPORT AREA REQUIRED AS SHOWN.
8. CORNER BLOCKS REQUIRED UNDER SEAT (3.4.3).
9. SECURELY MORTISE AND TENON OR SINGLE, DOUBLE, OR TRIPLE DOWEL ALL JOINTS AS SPACE PERMITS.
10. STUMP RAIL MEMBER: 70 mm W X 27 mm T.
11. CASTERS-57 mm DIAMETER (3.3.2).


ALL DIMENSIONS ARE IN MILLIMETERS (mm)


TYPE II, CLASS 1, STYLE E HIGH BACK, TILTING WITH FIXED SEAT AND BACK.

FIGURE 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

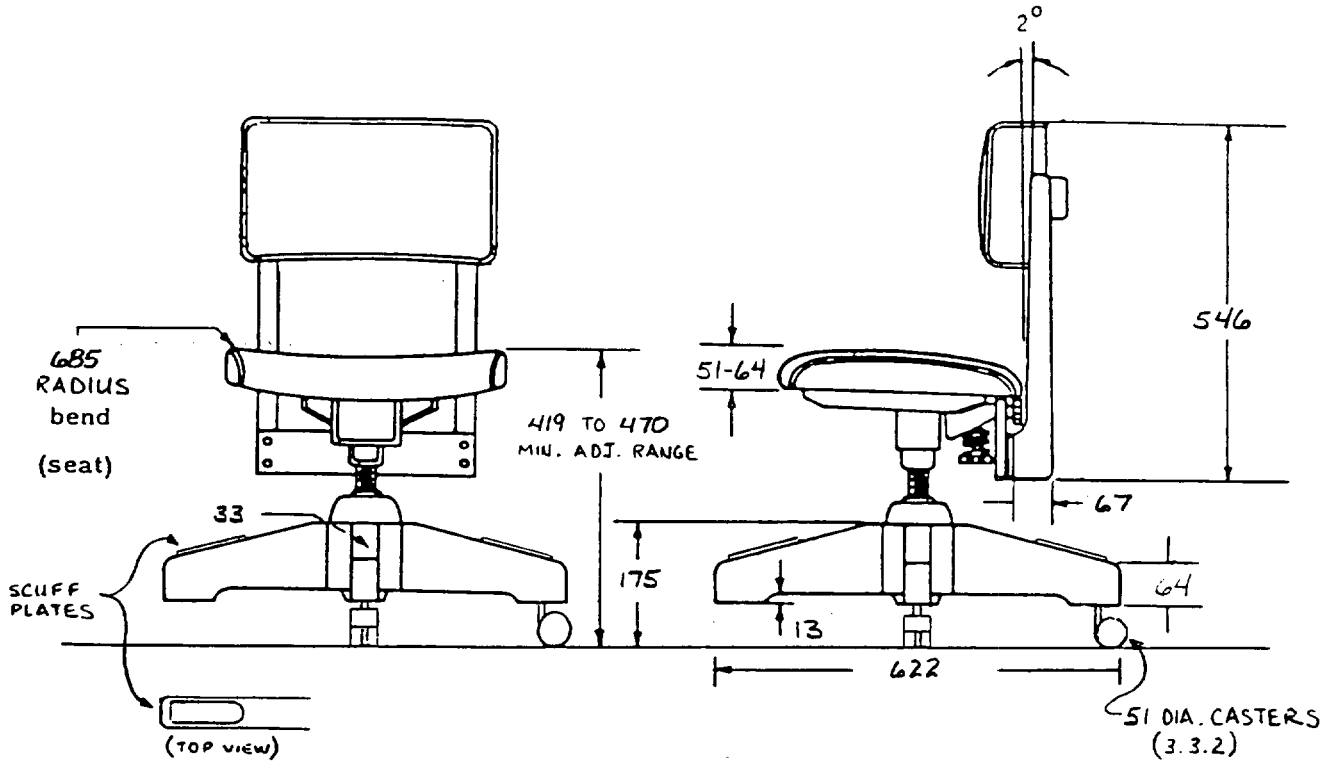

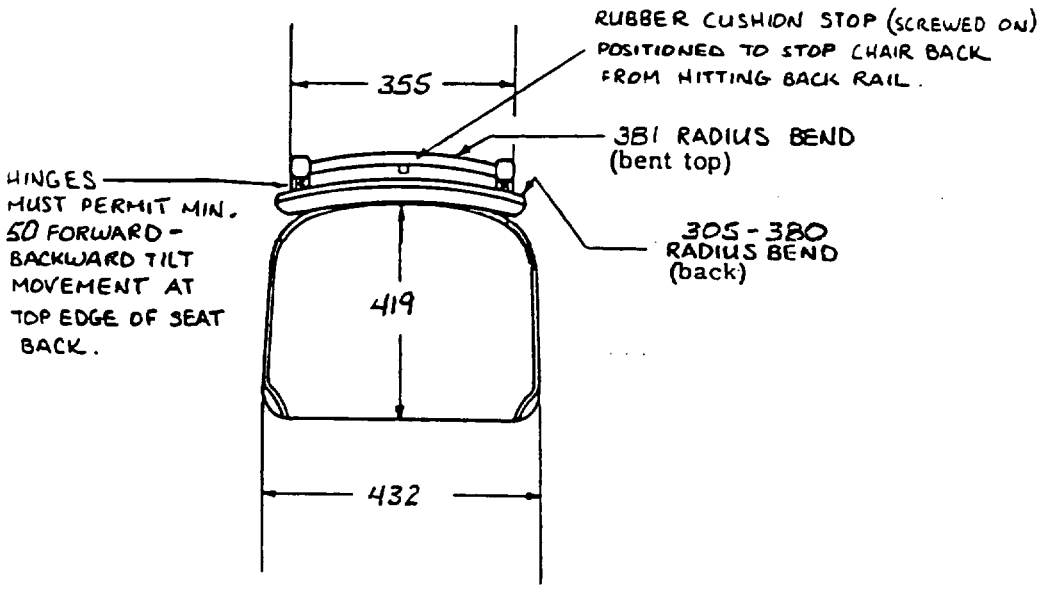

ALL DIMENSIONS ARE IN MILLIMETERS (mm)

TYPE II, CLASS 2, STYLE A POSTURE SECRETARIAL CHAIR
WITH FIXED SEAT AND TILTING BACK
FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.