AA-C-00556D
February 28, 1975
SUPERSEDING
Int. Fed. Spec. AA-C-00556C
June 15, 1965

INTERIM FEDERAL SPECIFICATION

COSTUMER, WOOD, GENERAL OFFICE

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification describes a general office wood costumer.

1.2 Classification.

1.2.1 Types and sizes. The wood costumer shall be of one type and one size. It shall be knockdown (KD) construction.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-Z-363 - Zinc - base alloy; die castings.
TT-L-57 - Lacquer, Rubbing, Clear (for Wood Furniture).
TT-S-196 - Sealer, Sanding, Lacquer Type (for Wood Furniture).
TT-S-720 - Stain, Wood, Non-Grain-Raising, Solvent Dye Type.
PPP-P-1877 - Packaging and Packing of Wood Office Furniture.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC, 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standards:

ASTM D-905 - Standard Method of Test for Strength Properties of Adhesives in Sheer by Compression Loading.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA. 19103).

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, one sample of the costumer shall be submitted or made ready for the contracting officer or his authorized representative to inspect. It shall be presented in KD condition. The unit may be previously assembled and disassembled before inspection. It shall be packaged, packed and marked as specified in section 5 of this specification. Packaging, packing and marking shall be inspected at this time. Components shall be inspected and the unit assembled according to the manufacturer's instruction sheet. The completed unit shall then be inspected for conformance with the requirements of the specification. Approval of the preproduction sample authorizes commencement of production, but does not relieve the contractor of responsibility form compliance with all other applicable provisions of this specification. Preproduction units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Materials. All materials shall be as hereinafter specified. All materials shall be unused in their present state and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Wood.

3.2.1.1 Wood varieties. Wood parts shall be of the kinds listed in table I and of the quality hereinafter specified. Only one species shall be used throughout a single unit.

TABLE I - Wood Varieties

Beech
Birch
Cherry
Hackberry
Maple
Red Alder
Southern Magnolia
Sweetgum
African Mahogany (Khaya)
Honduras Mahogany

3.2.1.2 Solid wood parts. Wood shall be bright, well sanded, and free from brashness, discolorations, worm holes, honeycomb, splits and shake, except that a few small burls, pin knots not exceeding two per square foot average, mineral streaks not exceeding 1/16 inch by 4 inches, or 1/8 inch by 2 inches in area and averaging not more than one per square foot will be permitted.

3.2.1.3 Seasoning. All wood shall be uniformly kiln-dried to a moisture content of from 5 to 8 percent. It shall then be held in properly controlled, warm, dry storage for a sufficient period of time to insure a uniform distribution of moisture among the individual pieces.

3.2.2 Adhesive. Adhesive used in the construction of the costumer shall be as follows: Any adhesive that will develop an average block shear strength of not less than 2800 P.S.I. when tested as specified in 4.4.1.

3.2.3 Finishing Materials.

3.2.3.1 Stain. Stain shall conform to Federal Specification TT-S-720.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.3.2 Sealer. Sealer shall conform to Federal Specification TT-S-190.

3.2.3.3 Lacquer, spray clear. Lacquer shall conform to type I or II, Federal Specification TT-L-57.

3.2.4 Hardware.

3.2.4.1 Glides. Glides shall conform to the following requirements:

a. Nail type
b. 1-1/4 inch diameter
c. Flat Bottom
d. Rubber cushioned
e. Oxidized copper finish

3.2.4.2 Hooks. Hooks shall conform to the following requirements:

a. Die cast zinc alloy conforming to Fed. Spec. QQ-Z-363, cast true, free from blow holes or other defects.
b. Bronze or brass plated with satin finish, .0002 inch thick min.
c. Upper hook shall support an 80 lb load applied over the knob.
d. Lower hook shall support a 12 lb load applied over the knob.
e. Shall be secured with a minimum of two No. 8 x 3/4 inch oval-head brass or bronze plated screws.

3.2.4.3 Steel stud, nut and washer. Steel stud shall be 5/16 inch by 8 inches long. A nut and washer which fit the stud shall be provided with each unit.

3.3 CONSTRUCTION.

3.3.1 Design. The design and construction of the costumer shall be as illustrated in figure 1 and as specified herein.

3.3.2 Components. Costumer components shall consist of a pole, two leg members, metal stud, four glides (3.2.4.1), four hooks (3.2.4.2) and fasteners.

3.3.4 Assembly. The pole and legs shall be shipped KD.

3.3.5 Assembly instruction sheet. The manufacturer shall prepare an instruction sheet with simple illustrated assembly directions. It shall be available for use and approval at the time of the preproduction inspection. The approved assembly instruction sheet shall be packaged with each unit.

3.3.6 Overall dimensions. The overall dimensions shall be 66 inches high by 24 inches square at the base (plus or minus 1/4 inch).

3.3.7 Component tolerances. All wood parts shall be carefully cut to insure an accurate fit and easy assembly with tolerances maintained that provide a tight, rigid unit when assembled.

3.3.8 Pole. Pole shall be 1-3/4 inches square over its entire length. The top 3/8 inch of the pole shall be beveled on a 45 degree angle on all four sides. Four hooks shall be mounted to the pole in the positions shown in figure 1. A 2 inch by 2 inch by 1/2 inch wood block shall be centered and securely glued and bradded to the bottom of the pole. A 8 inch minimum steel stud shall be screwed into the bottom of the pole as shown in figure 1. The unit shall be shipped with the nut and washer screwed onto the stud. The pole shall conform to either of the following constructions using any of the woods specified in table I.

a. Shall be laminated of three full length and width pieces provided the joint does not fall where the steel stud must be screwed in.
b. Shall be made of one solid piece.

3.3.9 Legs. Leg members shall be 1-3/4 inches thick by 24 inches long by 5-3/4 inches high (overall height). They shall be shaped and notched as shown in figure 1. The legs shall be made of solid or built-up stock. A hole of adequet diameter shall be bored through each leg member to receive the steel stud as shown in figure 1.

drawer compressor not easily and

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

3.4 Wood finishing.

3.4.1 Color and finish. The wood finish shall match the standard walnut laminate sample in color only (see 6.3). Grain appearance may vary depending on the wood used. Final finish shall be satin. Completed finish shall be tested as specified in paragraph 4.4.2.

3.4.2 Finishing procedure.

1. Wood components of the costumer shall be sanded smooth with corners and edges eased.
2. Sap stain to equalize wood color.
3. Apply selected colorant to wood to produce color specified.
4. Wash coat with adhesive sealer. Sealer shall withstand toughness and adhesion test specified in 4.4.3.
5. Scuff sand, using fineness of sandpaper grit needed to produce proper surface.
6. Seal with adhesive sealer.
7. Sand, using fineness of sandpaper grit needed to give proper surface.
8. Shade to tie in color variation, if necessary.
9. Top coat with two coats of lacquer.
10. Rub, steel wool, wax or polish, as required, to a soft satin finish.

Note: Operation No. 7 may be performed where shown or after operation No. 5.

3.5 Identification marking. Unless otherwise specified, each costumer shall be permanently marked on the underside of the base leg in a plain and legible manner with the National Stock Number, contract number, date of manufacture, specification number and the manufacturer's name or trademark so that the source of supply can be readily determined.

3.6 Workmanship. The details of construction, including design, joining, ease of assembly, finishing and marking shall be in strict accordance with the requirements and tolerances of this specification and with figure 1. Costumers shall be free from defects which affect appearance or which may affect serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Inspection shall be performed as indicated in paragraph 3.1.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.3.2 Inspection of end item. The lot shall be all units of the same type offered for inspection at one time. The samples shall be completely assembled or ready for assembly as applicable.

4.3.3 Inspection levels and acceptable quality levels (AQL's). Inspection and acceptable quality levels expressed in defects per hundred units shall be as shown in Table II.

TABLE II Acceptable quality levels in accordance with MIL-STD-105

For examination in	Inspection level	AQL's Major	AQL's Total
4.3.4	-	4	10
4.3.5	I		6.5
4.3.6	I		6.5
4.3.7	I		6.5

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

4.3.4 Visual examination, assembled costumer. The assembled units shall be examined for defects as specified in table III (see 4.3.3).

TABLE III Classification of defects

Examine	Defect	Classification Major	Classification Minor
Wood material	Species of wood in any wood component not as specified.	X	
	Split, shake or check over 2 inches in length.	X	
	Decay over 1/4 square inch in area in any component.	X	
	Split, shake, or check up to and including 2 inches in length which may affect serviceability.		X
	Loosened grain, torn grain or chip-out which may affect serviceability.		X
	Area over 4 square inches not smoothly surfaced.		X
	Honeycomb.	X	
	More than two exposed pin knots per square foot average.		X
	Loose Knot.	X	
	Knot greater than 1/8 inch diameter.	X	
	Glue line opening in edge glued or built-up stock over 1 inch in length.	X	
	Sapwood or mineral streak which may affect serviceability or strength.	X	
	Undesirable wood defect filled in with plastic wood or other filling compound.		X
Construction and workmanship	Wood component missing.	X	
	Loose or unsound joint.	X	
	Joint open more than 1/32 inch or 60 percent around its perimeter.		X
	Evidence that glue at joint or block has not been applied where required.	X	
	Steel stud screwed into a wood joint in pole (see 3.3.8, const. a).	X	
	Hooks not securely tightened.		X
	Steel stud prodrudes more than 1/8 inch from nut when unit is assembled.	X	
	Steel stud mounted off-center.	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE III Classification of defects (cont.)

Examine	Defect	Classification Major	Minor
Construction and workmanship (cont.)	Wood member improperly positioned or not positioned as specified.	X	
	Wood member warped, cupped, or twisted out of specified shape.	X	
	Shape or contour of wood member not as specified.	X	
	Wood not full length piece where required.	X	
	Unit does not assemble readily.	X	
	Assembly instruction sheet missing.	X	
Finish and appearance of exposed wood parts visible in normal use position.	Does not match standard reference panel with respect to color, texture, and gloss.	X	
	Discoloration (Bleeding) over 1 square inch in area.		X
	Spotted, affecting appearance.		X
	Light or dark colored areas, affecting appearance.		X
	Area of no lacquer or varnish film over 1 square inch in area.	X	
	Glue stain or glue line clearly showing, affecting appearance.		X
	Excess glue not removed.		X
	Finish peeling, flaking, blistered, cracked, checked or wrinkled.	X	
	Finish cut or rubbed through to wood.		X
	Open grain. Finishing material not filling pores.		X
	Orange peel, affecting appearance.		X
	Damage or scratch less than 1 inch long or 1 inch square.		X
	Damage or scratch over 1 inch square or 1 inch long.	X	
	Finish tacky, i.e., not completely dry.		X
	Rough or gritty surface or foreign matter imbedded in finish.		X
	Light colored edge not touched up.		X
	Burn-in or repairs not neatly accomplished.		X
	Unstained (white) wood visible when item is in normal use position.		X
	Not polished where required.		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE III Classification of defects (cont.)

Examine	Defect	Classification Major	Classification Minor
Finish of hardware.	Hat and coat hook corroded.		X
	Not finish specified.		X

4.3.5 Examination of assembly. Costumers unassembled for KD shipment shall be selected from each inspection lot, assembled and examined in accordance with the defects specified in Table IV. KD costumers shall be assembled to insure that the individual parts will intermember and be easily assembled (see 4.3.3).

TABLE IV, Visual defects of assembly

Examine	Defect
Assembly	Requires special tools for assembly. Not easily assembled, i.e. requires modification, excess force or enlargement of hole.
Assembly instructions	Missing, illegible or incorrect.

4.3.6 Dimensional examination. Any dimension not within tolerance specified shall be classified as a defect (see 4.3.3).

4.3.7 Examination of preparation for delivery requirements. Inspection of preparation for delivery requirements shall be in accordance with the quality assurance provisions of PPP-P-1877.

TABLE V Preparation for delivery defects

Examine	Defect
Marking	Incorrect; illegible; or improper size, location, sequence, or method of application.
Material	Any non-conforming components, component missing, damaged, or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate security of hardware, components and padding of perimeter edges.
Contents	Not as specified.

4.4 Tests, general.

4.4.1 Test for adhesives. Test for adhesives shall be as shown below (see 3.2.2).

TABLE VI - Test for adhesives

Component	Characteristic	Requirement Reference	Test Method	Sample Unit
Adhesive	Block shear test	3.2.2	ASTM D 905 1/ 2/ 3/	1/2 pint

1/ The following modifications apply when testing casein-type adhesive. The test blocks shall be placed under pressure between 10 and 20 minutes after spreading the adhesive, the adhering pressure shall be 175 ± 25 pounds per square inch, and the test blocks shall be held under pressure for at least four hours.

2/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The joints shall be conditioned at a relative humidity of 40 ± 4 percent.

3/ A test specimen that fails at less than 2,800 p.s.i. and displays 50 percent or more wood failure, shall be disregarded when computing the average shear strength. When the average shear strength (a) is less than the required 2,800 p.s.i., (b) has a 10 percent or greater difference between the high and low test specimen values, and (c) one or more samples fails at 2,800 p.s.i. or more, the test shall be rerun.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

4.4.2 Tests of finishing system. The following tests shall be made on the finishing system (see 3.4.1).

TABLE VII Tests of finishing system

Component	Characteristic	Requirement Reference	Test Method
Wood Finish System (Stain, sealer, filler, and lacquer) 1/	Spot test alcohol	3.4.1	4.3.3.3 and 4.3.3.3.1 of TT-L-57
	Print resistance	3.4.1	4.3.3.4, 4.3.3.4.1 4.3.3.4.2 and 4.3.3.4.3 of TT-L-57
	Cold check resistance	3.4.1	4.3.3.5, 4.3.3.5.1, 4.3.3.5.2, and 4.3.3.5.3 of TT-L-57
	Boiling water	3.4.1	4.3.3.6 of TT-L-57
	Ultra-Violet resistance	3.4.1	4.3.3.7 of TT-L-57
	Toughness and adhesion	3.4.1	4.4.3 herein

1/ The test shall be made on completely finished wood panels of the same wood used in production. The finish shall be in accordance with procedures used in producing furniture.

4.4.3 Toughness and adhesion. The test for toughness and adhesion shall be made by using Bell Laboratories Adhesion Tester, U.S. Testing Company, Model Number 100L, in accordance with instructions for using, as provided by manufacturer of the tester (see 6.3). The panel shall be marred both parallel and perpendicular to the grain. The resulting indentation shall show no whitening which is evidence of film separation. The film shall conform to the contour of the indentation and shall not crack in a brittle manner in or along the indentation. The test shall be made on completely finished wood panels of the same wood as used in production. The finish shall be produced in accordance with production procedures used in producing the furniture.

5. PREPARATION FOR DELIVERY.

5.1 Packaging, packing and marking. Each costumer shall be furnished KD and shall be packaged, packed and marked in accordance with PPP-P-1877 for "Costumer - KD". Packaging shall be level A,B, or C as specified (see 6.2), packing shall be level A, B, or C as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

6. NOTES.

6.1 Intended use. The costumer covered by this specification is designed for use in offices furnished with wood general office furniture.


6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

a. Title, symbol, and date of this specification.
b. When preproduction samples are not required.
c. Level of packing and packaging.
d. Marking requirements.

6.3 Bell Laboratories Adhesion Tester. Information about the bell Laboratories Adhesion Tester, Model No. 100L, may be obtained form U.S. Testing Company, Inc., 1415 Park Avenue, Hoboken, N.J.

GSA DC 73-8792

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

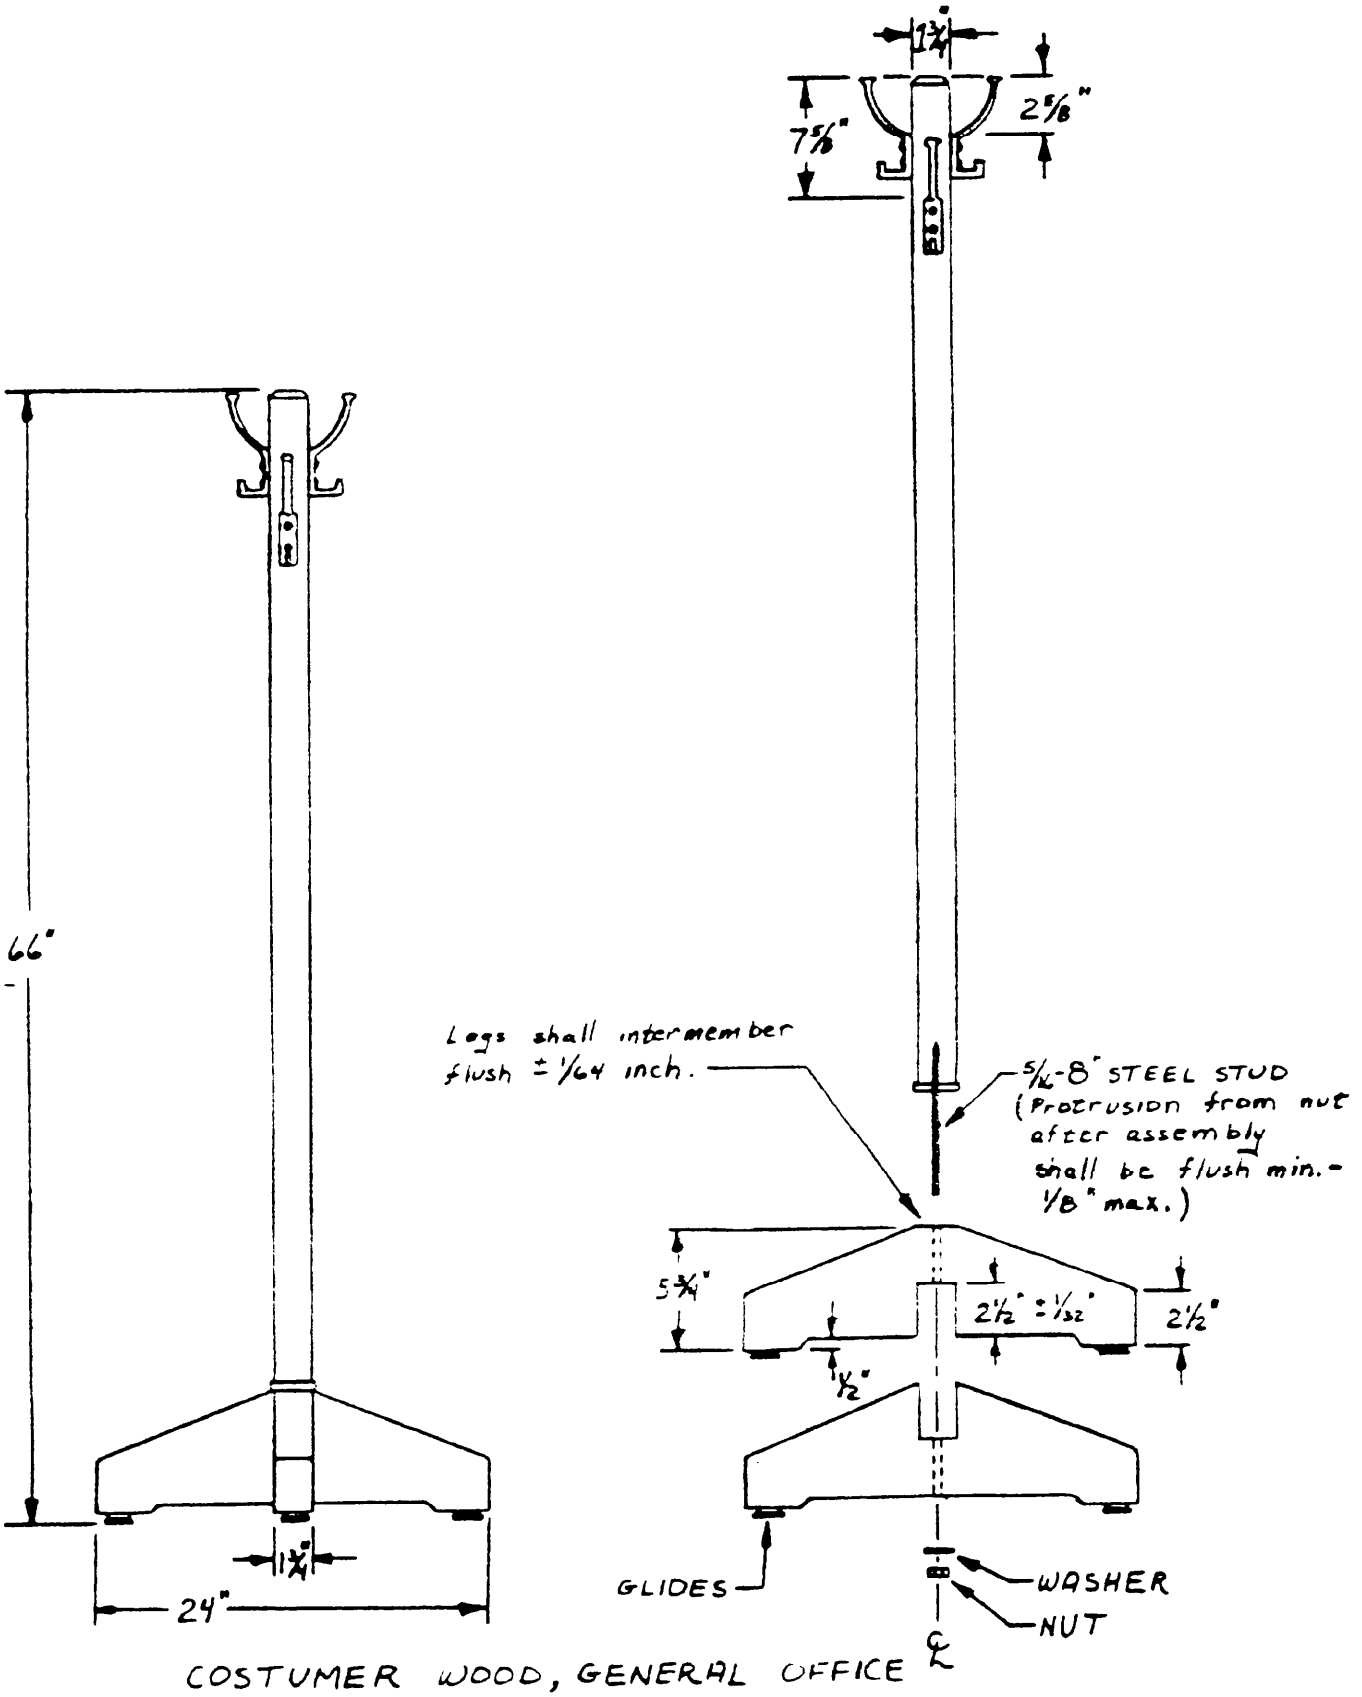

COSTUMER WOOD, GENERAL OFFICE

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.