AA-C-112D
October 4, 1976
SUPERSEDING
Int. Fed. Spec. AA-C-00112C (DSA-DM)
March 29, 1967 and
Fed. Spec. AA-C-112A
October 19, 1954

FEDERAL SPECIFICATION

CARTS, SURGICAL DRESSING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers aluminum or corrosion-resisting steel surgical dressing carts with pail and basin.

1.2 Classification.

1.2.1 Types. Dressing carts covered by this specification shall be of the following types as specified herein (see 6.2).

TYPE I - Aluminum, with pail and basin.

TYPE II - Corrosion-resisting steel, with pail and basin.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

U-P-410 - Tape, Adhesive, Surgical.
FF-C-77 - Casters, Institutional Duty.
QQ-A-200/8 - Aluminum Alloy, Bar, Rod, Shapes, Tube and Wire, Extruded, and Structural, Shapes, 6061.
QQ-A-250/11 - Aluminum Alloy 6061, Plate and Sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-wall.
PPP-B-1055	- Barrier Material, Waterproofed, Flexible.
PPP-C-843	- Cushioning Material, Cellulosic
PPP-F-320	- Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

Federal Standards:

Fed. Std. No. 66	- Steel, Chemical Composition and Hardenability.
Fed. Std. No. 123	- Marking for Shipment (Civil Agencies).
Fed. Test Method Std. No. 151	- Metals, Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issue, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116	- Preservation-packaging, Methods of.
MIL-A-8625	- Anodic Coatings, for Aluminum and Aluminum Alloys

Military Standards:

MIL-STD-105	- Sampling Procedures and Tables for Inspection. by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:38Z
Check the source to verify that this is the currentversion before use.

Packaged in accordance with MIL-P-116, Method III. The unit shall be ad-

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Fire Protection Association (NFPA) Standard:

No. 56A - Standard for the Use of Inhalation Anesthetics.

(Application for copies should be addressed to the National Fire Protection Association, 470 Atlantic Ave., Boston, MA 02210)

3. REQUIREMENTS

3.1 First Article. When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.1.2.1 and 6.2).

3.2 Material

3.2.1 Aluminum alloy. Alluminum plate and sheet shall be alloy 6061-T6 conforming to QQ-A-250/11 when tested as specified in 4.4.1. Rods, bars, and channels shall be alloy 6061-T6 conforming to QQ-A-200/8 when tested as specified in 4.4.1. Unless otherwise specified, commercial tolerances shall apply.

3.2.2 Corrosion-resisting steel. Corrosion-resisting steel shall be AISI 302 or 304 conforming to Fed. Std. No. 66 when tested as specified in 4.4.1. Unless other wise specified, commercial tolerances shall apply.

3.2.3 Common hardware. Screws, bolts, nuts and other common hardware shall be AISI 302 or 304 corrosion-resisting steel conforming to Fed. Std. No. 66. As an alternate, cadmium or chromium plate steel may be used. Nuts shall be self-locking type.

3.3 Construction.

3.3.1 Type I. Type I dressing carts shall be fabricated from aluminum alloy except as otherwise specified herein. The general design of the cart shall be as shown in figure 1 and as specified herein. Each cart shall consist of four uprights, a top, a medial shelf, guard rails, an adhesive tape bar and cutter, basin and pail supports, a basin, a pail, and two each of swivel and rigid casters. The top and medial shelves shall not have open gaps in the corner-fit with the upright. The cart shall be of riveted

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

a. Title, number and date of this specification.

construction throughout. The modified brazier head rivets shall be of high strength aluminum alloy 2117 T-4, Aluminum Association alloy designation. The overall dimensions of the cart shall be as shown in figure 1, with a permissible tolerance of ± 1/4 inch.

3.3.1.1 Uprights. The four uprights shall be of equal length, made of angle 2 inches by 2 inches by .128 inch thick (No. 8 Brown and Sharp (B. & S.)gage). The top ends shall be flush with the top guard rail. The bottom ends shall be punched to permit bolting of caster mountings. Exposed surfaces and edges shall be free of burs and sharpness.

3.3.1.2 Top and medial shelf. The dressing cart shall have a top and a medial shelf constructed of aluminum sheet .064 inch thick (No. 14 B. & S. gage). The top and the medial shelf shall each be inverted-box shape with side turned down a minimum of 1-1/2 inches and hemmed under not less than 1/2 inch for added strength. Top and shelf shall be riveted in place to uprights with a minimum of four rivets per corner.

3.3.1.3 Guardrails. The guardrails shall be 3/16 inch by 3/4 inch bars, riveted to the inside of the uprights. The top of the rail shall be 3 inches above the top shelf and 3 inches above the medial shelf as shown in figure 1, with four rivets in each corner. Surfaces and edges shall be free of burs and sharpness.

3.3.1.4 Tape bar and cutter. The end of the cart having swivel casters, shall be fitted with 1/8 inch thick brackets suitable for carrying a removable adhesive tape bar and tape cutter. The tape bar shall be retained securely in place, but shall be removed easily to install rolls of tape. The brackets shall be riveted to the uprights. An angle 1 inch by 1 inch by .128 inch thick (No. 8 B. & S. gage) shall span the brackets and shall be riveted thereto. A steel saw-toothed adhesive tape cutter, suitably plated to resist rust and corrosion, shall be secured to the vertical leg of the angle with bolts and acorn nuts. The cutting blade shall be hardened steel, having ground teeth of appropriate number and design to enable it to cut adhesive tape brought over its edge with an upward rolling motion in either direction, when tested as specified in 4.4.3. A guard, .064 inch thick (No. 14 B. & S. gage), shall be pivoted to the brackets so that in its normal pendant position it will cover the cutting edge and minimize the danger of injury to personnel using the cart. The pivot assembly shall be positioned and attached so that it will operate smoothly. The tape bar shall be aluminum bar having a diameter of 1/2 inch. The brackets, bar, angle, and cutting edge shall conform to section B-B of figure 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.3.1.5 Basin support. The end of the cart having fixed casters shall be fitted with a swing-away mounting ring to accommodate a basin. The mounting ring shall be on the right hand side of the cart as shown in figure 1. The ring shall be formed from a 3/8 inch diameter corrosion-resisting steel rod bent into a circle, 11-3/8 inches inner diameter, at one end. The other end shall be bent down to an angle of 90° to form an "L" with the plane of the circle. The downward leg of the "L" shall fit into a bracket made from aluminum .128 inch thick (No. 8 B.& S. gage) formed to support the rod and basin. The bracket shall be riveted to the inside of the upright below the top shelf, positioned so that the basin is free to swing in and out. The basin shall be completely under the top shelf in the "in" position and completely outside the frame of the cart in the "out" position. Notches, or other means shall be provided to retain the basin support in the full-in and full-out positions without making it difficult to swing it toward the opposite position.

3.3.1.6 Pail support. A pail support and slides shall be located on the same side of the cart as the basin, and positioned at the center of the cart under the medial shelf. The pail support shall be .064 inch thick (No. 14 B.& S. gage) with front and side flanged down at least 1 inch, and at 11-1/2 inch hole for the pail. The slides shall be of .062 inch thick (No. 16 United States Standard (U.S.S.) gage) corrosion-resisting steel, riveted to the flanges of the shelf. The pail shall slide in and out freely and hinged stops shall be installed which shall prevent accidental removal of the pail support. The pail shall be completely under the medial shelf in the "in" position and completely outside the frame of the cart in the "out" position.

3.3.1.7 Casters. Type I carts, shall be mounted on four ball-bearing casters, two rigid-type casters on one end and two swivel-type casters on the opposite end. Except as specified herein, the casters shall conform to Class B, 5 inch wheel diameter, style b, mounting as specified in FF-C-77. Caster forks and wheel discs shall be cold rolled steel, chromium, zinc, or cadmium plated. Each caster stem shall be drilled through for clearance for a mounting bolt which shall extend through the upright and be held secure with a nut and lock washer. Nuts, bolts and lockwashers shall be made of corrosion-resisting steel. The casters shall be fitted with detachable round rubber tires.

3.3.2 Type II. Type II dressing carts shall be fabricated from corrosion-resisting steel except as specified herein. The general design of the cart shall be as shown in figure 2, and as specified herein. Each cart shall consist of four uprights, a top, a medial shelf, a top guard rail, and adhesive tape bar and cutter, basin and pail supports, a basin, a pail, and two each of swivel and rigid casters. The cart shall be of welded construction throughout. The dimensions of the cart shall be as shown in figure 2 with a permissible tolerance of ± 1/4 inch.

3.3.2.1 Uprights. The four uprights shall be of equal length, made of tubing having a wall thickness of .065 inch thick (No. 16 Birmingham Wire (B.W.) gage) and an outside diameter of one inch. The top ends shall be closed with corrosion-resisting steel caps welded smoothly and continuously. The bottom ends shall be fitted with caster mountings to permit replacement of casters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

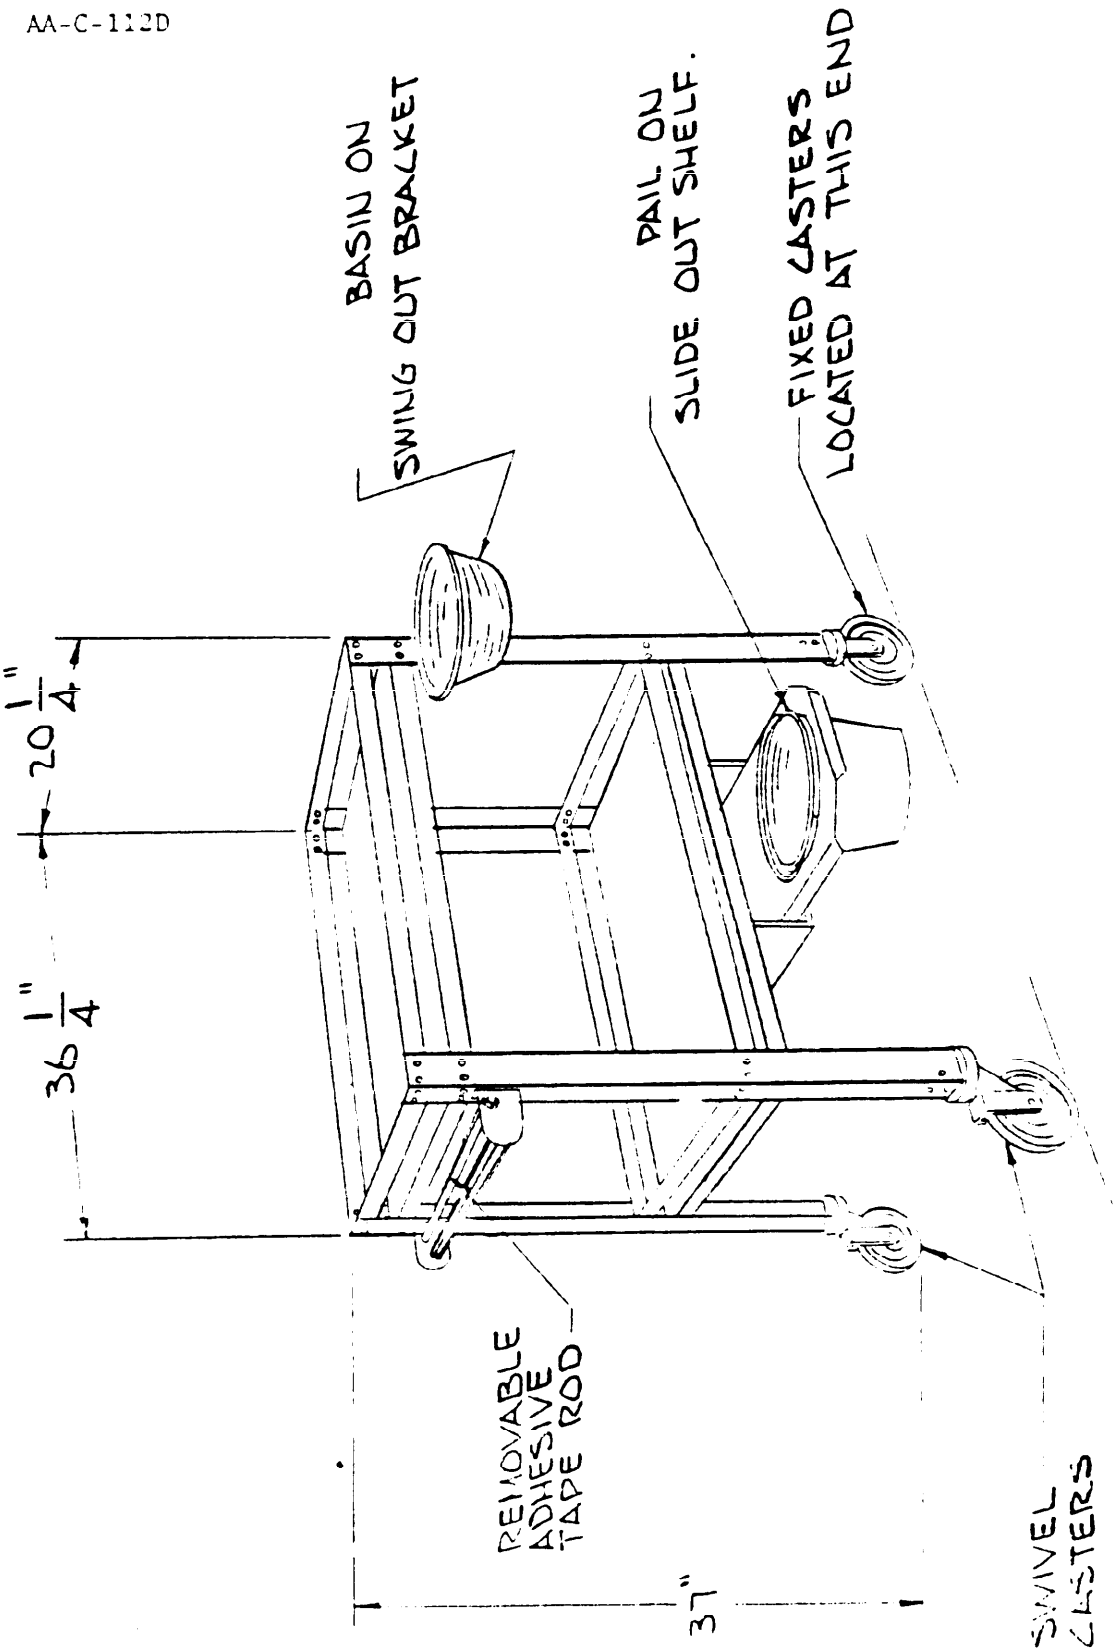


FIGURE 1. Cart, surgical dressing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

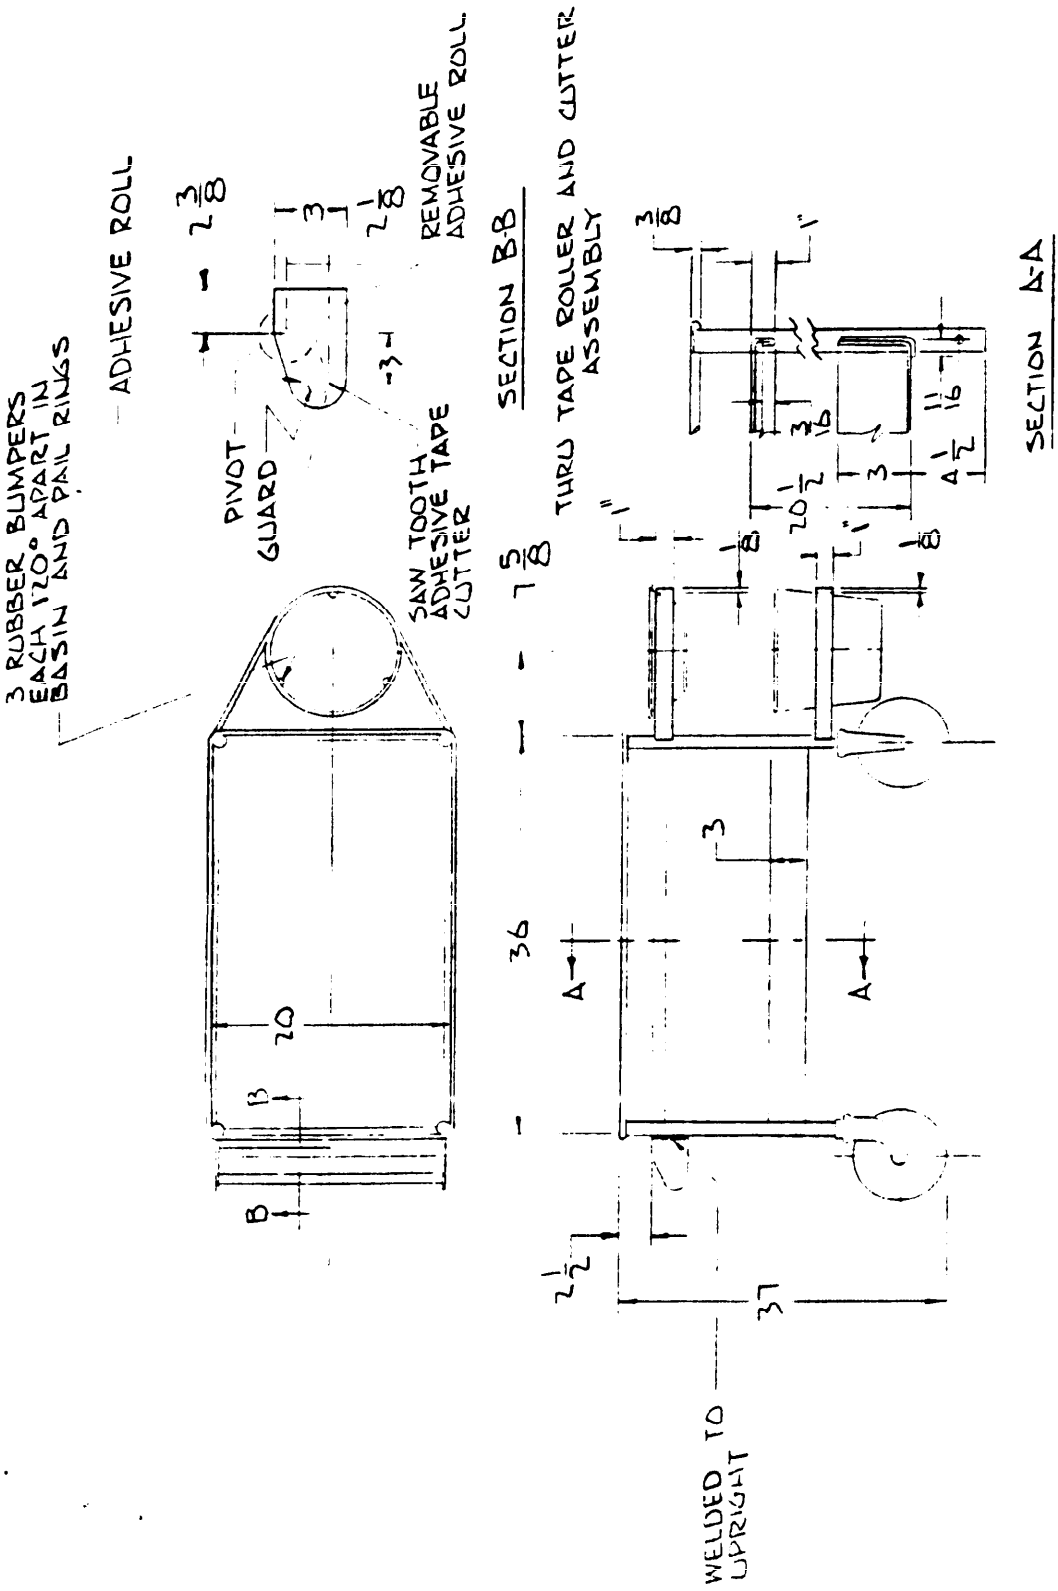


FIGURE 2. Cart, surgical dressing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.3.2.2 Top and medial shelf. The dressing cart shall have a top and a pan-type medial shelf each made of corrosion-resisting steel .062 inch thick, (No. 16 U.S.S. gage). The corners of the top and shelf shall be notched on a 1/2 inch radius. The welding shall be continuous on the insides along the intersections of the flanges and uprights. The top shall have all edges flanged downward and shall be hemmed as shown in figure 2. The medial shelf shall have all edges turned upward and returned under the shelf as shown in figure 2.

3.3.2.3 Guardrail. The guardrail shall be of rod not less than 3/8 inch in diameter, shall encircle the uprights, flush with the tops of the uprights (see figure 2), and shall be continuously welded (top, bottom, and sides) to each. The welds shall be ground and polished to form a flat surface, flush with the tops of the uprights.

3.3.2.4 Tape bar and cutter. The end of the cart having swivel casters shall be fitted with 1/8 inch thick brackets as indicated in figure 2. The brackets shall incorporate a removable adhesive tape bar, and a tape cutter. The tape bar shall be retained securely in place, but shall be removed easily to install rolls of tape. The brackets shall be butted against and welded to the center of the uprights. Welding to the upright shall be continuous on all contact surfaces. A 3/4 inch by 1/2 inch wide angle .062 inch thick (No. 16, U.S.S. gage) shall span the brackets and shall be continuously welded thereto. A steel saw-toothed adhesive tape cutter suitably plated to resist rust and corrosion shall be secured to the vertical leg of the angle with bolts and acorn nuts. The cutting blade shall be carbon steel having hardened teeth of appropriate number and design to enable it to readily cut adhesive tape brought over its edge with an upward rolling motion in either direction when tested as specfied in 4.4.3. A guard .062 inch thick (No. 16, U.S.S. gage) shall be loosely pivoted to the brackets, so that in its normal pendant position, it will cover the cutting edge and minimize the danger of injury to personnel using the cart. The pivots shall consist of corrosion-resisting steel rivets suitably spaced with corrosion-resisting steel washers to form smooth and easily working joints. The tape bar shall be corrosion-resisting steel having a diameter of 1/2 inch.

3.3.2.5 Basin and pail supports. The end of the cart having fixed casters shall be fitted with two mounting rings, each formed from a single piece of corrosion-resisting steel. Each mounting ring shall be fitted with three conductive rubber bumpers, equidistantly spaced, securely fastened, but capable of being replaced. The bumpers shall support the utensils and shall prevent rattling while the cart is in motion. The bracket for holding each mounting ring shall be welded flush with the outside surface of the uprights. The weld shall be continuous and shall extend on all contact surfaces of the bracket and uprights. This shall include fillet welds at the ends. Each mounting ring shall be continuously welded at all contact surfaces of the bracket. The upper mounting

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the currentversion before use.

San Francisco, Los Angeles, and Chicago, Kansas City, MO, Fort Worth, Denver

ring shall be of sufficient diameter to accept the wash basin so that the side of the basin rests against the rubber bumpers. The point of contact between the rubber bumpers and the basin shall be just below the beaded edge and not more than one inch down from the top of the basin. The lower mounting ring shall be of sufficient diameter to accept the pail so that the side of the pail rests against the rubber bumpers. The point of contact between the pail shall be within 3-1/2 inches of the rim of the pail.

3.3.2.6 Welding. All welding shall be done with welding rods of corrosion-resisting steel, similar in composition to the welded members. All visibly exposed welds shall be ground smooth to eliminate traces of pit marks and seams, and polished to blend with adjacent surfaces.

3.3.2.7 Casters. Type II carts shall be mounted on four ball-bearing casters, two rigid-type casters on one end and two swivel-type on the opposite end. The casters shall conform to class C, 8-inch wheel diameter, style a, mounting as specified in FF-C-77. Caster forks and wheel discs shall be cold rolled steel, chromium, zinc, or cadmium plated. The casters shall be fitted with detachable, round, conductive-rubber tires.

3.4 Basin and pail. A basin and a pail, each formed of seamless corrosion-resisting steel, shall be furnished with each cart (see 6.5). The basin shall have a wall thickness of .027 inches minimum and a capacity of at least 3-7/8 quarts. The depth of the basin shall not exceed 4-3/4 inches and the diameter shall be such as to provide a stable and secure fit in a mounting ring, 11-3/8 inches in inner diameter, formed of 3/8 inch diameter rod. The pail shall have a wall thickness, of .015 inches minimum and a capacity of at least twelve quarts. The depth of the pail shall be not greater than 10-1/2 inches and the diameter shall be such as to rest firmly in a hole 11-1/4 inches in diameter, with the rest point not more than 2-1/4 inches from the rim.

3.5 Finish.

3.5.1 Type I carts. The cart shall be thoroughly cleaned to remove foreign particles such as dirt, grease, graphite, and metal. As a final finish, cart shall be anodized in accordance with Type II of MIL-A-8625, and hot water or nickel acetate sealed.

3.5.2 Type II carts. Exposed corrosion-resisting steel surfaces shall be cleaned, and shall be given a number 4 standard finish (ground and polished). Unexposed welds and surfaces shall be finished in accordance with the best commercial practice.

3.6 Electrical conductivity. The type II carts shall meet the requirements of NFPA 56A when tested as specified in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.7 Identification marking. Each cart shall be permanently and legibly marked with the contract or purchase order number. This information may be on a permanently attached metal plate or it may be stamped into the metal. It shall be located so as to be readily accessible, but it shall not detract from the appearance of the cart.

3.8 Service data. The contractor shall furnish, with each unit, two copies of service data containing complete instructions for maintenance, and a list of component parts. Descriptive material shall include adequate information so that the replacement parts can be ordered by the manufacturer's part number, and without confusion as to the item identification. Identical or interchangeable replacement parts shall be identified by a single part number only.

3.9 Workmanship. Workmanship shall be such that the carts shall be free from defects which detract from their appearance or which may impair their serviceability. All exposed corners and edges shall be ground smooth, rounded, or otherwise treated to eliminate sharp or ragged edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the contractor may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

4.1.2.1.1 First article inspection. First article inspection shall be performed on the carts when a first article sample is required (see 3.1). This inspection shall include examination of 4.3 and tests of 4.4.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.3 and tests of 4.4.

4.1.3 Certificates fo quality. Certificates of quality, supplied by the manufacturer of the metals, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demostrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component or material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and table I.

TABLE I. Sampling for examination

	Inspection level	AQL (percent defective)
For visual examination		
Major Defects	II	1
Minor Defects	II	4
For dimensional examination	S-2	2.5

4.2.2 For tests. Sampling for tests shall conducted in accordance with MIL-STD-105 and Table II for an inspection level of I and an AQL of zero.

TABLE II. Sampling for tests

Component	Characteristic	Requirement	Test procedure
Type II cart Tape cutter	Electrical Conductivity Performance	3.6 3.3.1.4, 3.3.2.4	4.4.2 4.4.3

4.2.3 Raw materials. A sufficient quantity of each lot of each metal used in the manufacture of the carts shall be selected for chemical analysis.

4.3 Examination. The carts shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table III. Examination shall not be restricted to the classified possible defects listed below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects

Categories	Defects
Major	
101	Any component part missing, broken, deformed, or otherwise unusable.
102	Assembled unit not rigid.
103	Any riveted joint not firm.
104	Pail or basin support does not operate smoothly over full distance of movement (Type I).
105	Basin support does not remain positively in full-in and full-out positions. (Type I).
106	Welds not free of pits, cracks, burns, undercutting, and discoloration.
107	Cart does not rest evenly, without rocking, on level surface
108	Cart does not roll and turn easily on casters.
109	Weld not complete as specified.
Minor	
201	Finish not as specified, or not free of chipped areas, cracks, scratches, roughness, tool marks.
202	Basin or pail does not rest evenly in its support.
203	Service data missing, unclear, or incomplete.
204	Identification marking missing, incomplete, or illegible.

4.3.2 Dimensional examination. The carts shall be examined for compliance with dimensional requirements. Any dimension not within the tolerance specified shall be classified as a defect.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine compliance with the packaging, packing and marking requirements of section 5. Defects shall be scored as specified in table IV. Sampling shall be in accordance with MIL-STD-105. The sample unit shall be one container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with AQL of 4.0 expressed in terms of percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Contents	not as specified
Container	not as specified.
Marking	Omitted; incorrect; illegible; improper size, location, sequence or method of application.
Material	Component missing or damaged.
Workmanship	Bulging or distortion of containers.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Chemical composition. Tests for chemical analysis shall be conducted in accordance with method 111 or 112 of Fed. Test Method Std. No. 151.

4.4.2 Electrical conductivity. The type II carts shall be tested as described in NFPA No. 56A.

4.4.3 Tape cutter. One 1 inch wide roll and one 3 inch wide roll of surgical adhesive tape, type I of U-P-410 or equal, shall be placed upon the tape bar. Each roll shall be cut twice, with an upward rolling motion once to the right and once to the left, without interfacing with the free motion of the tape roll.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. The casters, basin and pail shall be removed from the cart. The cart, casters, basin and pail shall be protected and packaged in accordance with MIL-P-116, method III. The unit shall be adequately protected by being cushioned to prevent damage during handling, shipment and storage. Cushioning material shall conform to PPP-C-843, PPP-F-320 or other suitable material. Each cart shall be provided with a waterproof shroud fabricated from barrier material conforming to PPP-B-1055 or minimum .003 inch thick polyethylene. Waterproof shroud shall not be required when fiberboard exterior containers are used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Each cart shall be packaged in manner that will afford adequate protection against corrosion and physical damage during shipment from the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Each cart packaged as specified in 5.1, shall be packed in an exterior container designed for a type 3 load and conforming to PPP-B-585, class 3, style 3; PPP-B-601; overseas type; PPP-B-621, class 2; or PPP-640, class 2, style E or G. Closure and strapping shall be as specified in the appendix of the applicable box specification. Fiberboard boxes shall be waterproofed as specified in the appendix of PPP-B-640 and the use of metal strapping is not authorized.

5.2.2 Level B. Each cart packaged as specified in 5.1 shall be packed in in an exterior container designed for a type 3 load and conforming to PPP-B-640, class 1, style E or G. Closure shall be as specified in the appendix of the applicable box specification. Waterproof shrouds shall not be required for carts packed level B.

5.2.3 Level C. The packaged carts shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment form the supply source to the first receiving activity. These packs shall conform to the carriers rules and regulations.

5.3 Marking.

5.3.1 Civil agencies. Marking for shipment shall be in accordance with Fed. Std. No. 123.

5.3.2 Military. Exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The carts are intended for use in hospitals and other medical facilities.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

a. Title, number and date of this specification.
b. Selection of applicable levels of packaging and packing. (see 5.1 and 5.2).
c. When a first article is required (see 3.1, 4.1.2.1 and 6.3).
d. Type required (see 1.2.1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:38Z
Check the source to verify that this is the currentversion before use.

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 This specification covers the following item appearing the Federal Supply Catalog:

National Stock Number	Item Identification	Type
6530-00-926-9128	Cart, Surgical Dressing Aluminum	I
6530-00-774-1025	Cart, Surgical Dressing Corrosion-resisting steel	II

6.5 Basins and pails which meet the requirements of this specification are available from the Vollrath Company under their catalog numbers 8730 for basins and 5813 and 5912 for pails, and from Polar Ware Company under their catalog numbers 132 for basins and 12N for pails.

MILITARY CUSTODIANS:
Army - MD
Navy - MS
Air Force - 03

Preparing activity: DSA-DM

Civil Agency Coordinating Activities:
GSA-FSS
VA-DMS

Project No. 6530-1382

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra and other documents referenced herein. Price 45 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

AA-C-112D CARTS, SURGICAL DRESSING

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.