AA-C-295

5 August 1955

SUPERSEDING
Int Fed. Spec. AA-C-00295 (GSA-FSS)
Revision 1, dated
9 February 1955

FEDERAL SPECIFICATION

CHAIRS, ROTARY, STEEL TUBULAR, SPECIAL PURPOSE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

1. SCOPE AND CLASSIFICATION

1.1. Scope.—The tubular steel, rotary armless chairs covered by this specification are of but one type and are intended for groups of typists, telephone or machine operators, draftsmen and for similar personnel or areas where some degree of posture is required, but where it is not necessary to match other items of standard equipment The class 1, size 1 chair is a fully adjustable posture chair

1.2 Classification.

1.2.1 *Class and size*.—The chairs shall be of the following classes and sizes as specified in the invitation for bids

Class 1.—Non-tilting seat, tilting adjustable back.
Size 1.—Standard base

Class 2.—Non-tilting seat, non-tilting adjustable back
Size 1.—Standard base
Size 2.—Intermediate base
Size 3.—High base

1.2.2 *Color of finish*.—The color of finish shall be dark brown, gray, or olive green, as specified, and shall be the manufacturer's standard commercial colors

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1. The following specifications and standards, of the issues in effect on date of invitation for bids form a part of this specification.

Federal Specifications

FF-C-81—Casters, Metal-Chair
UU-C-843—Cushioning Materials, Cellulosic
UU-T-111—Tape, Paper, Gummed (Sealing and Securing)
CCC-A-700—Artificial Leather Upholstery (Synthetic Resin Coated Cloth).
CCC-F-66—Fabrics, Upholstery
DDD-S-751—Stitches, Seams, and Stitching
LLL-B-631—Boxes, Fiber, Corrugated (For Domestic Shipment)

Military Specifications

JAN-P-106—Packaging and Packing for Overseas Shipment—Boxes, Wood, Nailed
MIL-L-10547—Liners, Case, Waterproof.
MIL-R-17252—Rubber, Cellular (Bonded Shredded)

Military Standards

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129—Marking for Shipment and Storage
MIL-STD-130—Identification Marking for U S Military Property

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index The Index which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superin-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

tendent of Documents, U S Government Printing Office, Washington 25, D C

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Office in Boston, New York, Atlanta, Chicago, Kansas City, Mo, Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D C

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

3. REQUIREMENTS

3.1 Materials.

3.1.1 *Steel*.—All steel parts shall be cut, stamped, or die-formed from steel sheets and steel tubing Sheet steel shall be of a mild furniture stock and shall be free from rust, scale, and other imperfections All steel tubing shall be seamless, butt-welded, or continuously seam-welded The gage numbers specified for the steel chair parts are the Manufacturers' Standard Gage for Steel Sheets The decimal equivalent of the steel thickness is subject to the established standard tolerances or ordering limits

3.1.2 *Bonded shredded foam*.—The bonded shredded foam shall be made of new synthetic or natural rubber foam that is dry, free from coagulation, excessive flesh and other foreign materials and shall conform to type II class 2, condition medium, as specified in Military Specification MIL–R–17252, except that each seat cushion shall be molded The molded shredded foam cushions for the seats shall be 2 inches thick before application and the shredded foam for back pads shall be die cut from 1-inch-thick sheet stock before application Dimensional tolerances shall be as specified in military specification MIL–R–17252.

3.1.3 *Upholstery*.—Unless otherwise specified, upholstery covers shall be type IV, number 12 of Federal Specification CCC–F–66 When specified, upholstery covers shall be of a quality not lower than class 2 of Federal Specification CCC–A–700, Artificial Leather Upholstery (Synthetic Resin Coated Cloth) The finish shall be that of simulated top-grain leather and the color shall be approximately the color of the chair frame

3.1.4 *Hardware.*

3.1.4.1 *Chair control*.—The chair controls shall provide for raising and revolving all chair seats either in the base or in the spider and shall also provide for tilting of the backs of all class 1 chairs All chair controls shall have readily accessible malleable cast iron or steel knobs or handwheels having a well-formed finger grip for easy adjustment The mechanism shall be positive and non-binding in its height adjustment so that a sudden jar, revolving, or constant load for 8 hours of 200 pounds will not change the height of the seat All spider parts shall be designed to meet the tests specified in 4.3 and may be made of pressed steel, malleable cast iron or aluminum The spider shall be secured to the seat at not less than four places and shall have sufficient spread to insure proper balance and safety When revolving action is in the spider the spindle mounting shall be a metal tube or bracket and shall extend down and around the spindle not less than 2 inches, and shall have a seat not less than ¼ inch thick, on which the spider shall revolve The mounting shall be continuously welded or riveted in place making a strong, well balanced, easily revolving unit When revolving takes place in the base the spindle shall be continuously welded or riveted to the spider and shall have a press-fit bracket or machined part extending down and around the spindle not less than ⅞ inch The spindle shall be not less than 1 inch in diameter steel rod, and shall provide for height adjustments at not more than ¾ inch intervals over a span of not less than 3 inches The back tilt adjustment for class 1 chairs shall be a spring tension or rubber torsion tilt unit to control and insure the proper tilt tension of the back. The back tilt tension adjustment bolts shall not be supported by the seat pan but the support must

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

be a part of the chair control The tilt shall have a positive safety stop which shall prevent the chair back from tilting more than 17 degrees from the initial forward position should there be any failure or breakage of the tilt unit The spring shall be properly tempered and be of sufficient size and number of coils so that when the tension is adjusted to the normal position and the back tilted against the stop, the spring will not have reached full compression

3.1.4.2 *Casters* —Casters and caster sockets shall be in accordance with Federal Specification FF-C-81. Classes 1 and 2, size 1 chairs shall be type 1 (ball bearing swivel) size B (2-inch-wheel diameter), and wheel composition material 2 (hard rubber composition with soft rubber tread) Riveted caster wheel axles will be acceptable

3.1 4.3 *Glides* —Glides shall be properly nickel or chromium plated or polished stainless steel and shall be of the live-ruber cushioned and spring-steel-expansion or rubber-expansion type that can be firmly secured to each leg but may be removed without special tools for replacement There shall be no metal to metal contact of glide base and chair leg after the glides are applied and the glides shall be not less than 1-1/16-inch diameter with a substantially flat bottom The base shall be of stamped steel and hardened after forming to not less than 15 N 85 Rockwell or equivalent on comparable scale The base shall have properly curled edges to contain and retain the rubber cushion which shall fill the inside of the base and extend not less than 5 '32 inch above the top edges

3.1.5 *Bolts nuts and lockwashers* —Bolts nuts and lockwashers shall be zinc or cadmium plated

3.2 **General construction.**

3.2.1 *Design* —The figures 1 through 4 illustrate the general appearance and typical construction of the chairs required. The area of the seat and back shall be not less than the areas shown in the figures, (as taken from over-all measurements) and shall be proportioned for adequate comfort. Adjustments for seat height and for both vertical and horizontal positioning of the back shall be provided Low seat height position for size 1 chairs and range of vertical and horizontal back adjustments for all sizes of chairs shall be the manufacturer's standard commercial practice

3.2.1.1 *Preproduction sample* —When specified, before production is commended, a finished sample of the commodity to be furnished shall be made available for the approval of the contracting officer, together with a certified copy of test results showing compliance with all applicable tests

3.2.1.2 *Assembly of parts* —The assembly of metal parts shall be by fusion welding and brazing to achieve maximum strength Jigs shall be used to insure proper alignment of parts during welding When necessary, mechanical joints shall be made with solid-steel rivets, or with bolts, nuts, and lockwashers Hinge joints of tubing shall be supported on both sides of the tube

3.2.1.3 *Welding and brazing* —All welding shall accomplish rigid joints, in true alignment Welds shall be sound, without porosity, and shall be ground smooth to present a finished appearance and to provide a rigid one piece construction that shall be of sufficient strength to meet the prescribed tests, without any parts that will work loose or affect the safety of the occupant during heavy daily use Tack welds will not be acceptable

3.2 1.4 *Bending of tubes* —The tubes shall have true and even curves without flattening crushing, or crimping that will affect the strength or appearance of the tubes

3.2.2 *Seat pan* —The seat pan shall be of steel or aluminum designed to withstand the test specified in 4 3 The seat pan shall be embossed, saddle shaped, or ribbed for increased strength and comfort and shall be perforated for ventilation Seat pans formed without an apron shall have an extruded rubber bumper all the way around to eliminate all sharp edges and provide ample protection from cutting the upholstery cover under hard service conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.3 *Back pan.*—The back pan shall be contour shaped to fit the occupants back and shall be formed of one or more thicknesses of steel. The inner pan shall have rolled flanged edges and the outer pan shall be shaped to closely fit inside the flange of the inner pan and shall be secured by four screws or an equally secure method approved by the contracting officer. The pan to which the mounting is secured shall be not less than 20-gage (0.0359-inch) steel, and the other pan shall be of not less than 24-gage (0.0239-inch) steel. A single thickness pan of not less than 16-gage (0.0598-inch) steel having a concealed rubber bumper extrusion around the entire edge will also be acceptable.

3.2 4 *Base* —The base shall be constructed of not less than 1-inch outside-diameter 16-gage (0.0598-inch), or 1¼-inch-outside-diameter 18-gage (0.0478-inch) steel tubes. The four legs shall be at right angles to each other and shall start vertically from the floor, then curve inward to the center hub to which the legs shall be welded and reinforced to withstand the tests described in 4.3 The bottom of the legs shall be designed to rigidly pressure grip and tightly secure the caster sockets as specified in 3.1.4.2 or to secure the glides as specified in 3.1 4.3 The center hub and leg-reinforcement shall be of not less than 16-gage (0 0598-inch) steel or cast malleable metal of equal strength, and shall be designed to eliminate sharp edges that might cause injury or soil clothing or shoes The center hub shall have an accurately reamed or burnished spindle housing Legs secured to malleable cast hubs shall be continuously welded to the leg socket If the revolving action takes place in the hub, the housing shall be not less than 3 inches long and shall have a flat smooth bearing surface not less than 3/16 inch wide for the chair control thrust bearing If the revolving action takes place in the spider, the housing shall be not less than 2½ inches long. Provision shall be made for securing the chair iron to the base which will permit removing the spindle from the housing when required.

3.2.5 *Back frame.*—The back frame shall provide for positive adjustment, both vertically and horizontally, of the back rest so that it may be easily positioned and fixed at the correct individual posture without the use of tools The back frame shall be either tube construction forming a double post or one-piece construction of a single spring-steel flat bar, that will not twist or take on a permament deformity during heavy daily use or rough handling in moving.

3.2.6 *Application of upholstery* —The upholstery covers shall be attached to the seat and back in a manner to insure lifetime security, smooth surfaces and even, well-rounded edges. The covers shall not contact unprotected sharp or hard edges of the seat or back pan The method of attachment shall be completely free from hazardous surfaces or devices and shall prevent slippage and excessive wear of the covers after continual heavy use All seams shall be of type 301 or type 401 stitching as described in Federal Specification DDD-S-751, all other edges shall be either hemmed or folded to double thickness at securing areas

3.3 **Detail requirements.**

3.3.1 *Class 1, size 1 chair* —The class 1, size 1 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 1 and as specified herein The chairs shall withstand the tests as described in 4 3.

3.3.1.1 *Base* —The base shall be as specified in 3.2 4 and shall be equipped with casters as specified in 3.1 4 2


3.3.1.2 *Chair control* —The chair control shall be as specified in 3.1 4.1 and shall have the back tilt adjustments

3.3 1.3 *Seat* —The seat pan shall be as specified in 3.2.2 and shall be rigidly secured to the chair control at not less than four places by solid rivets or bolts, nuts and lockwashers The molded shredded foam cushion as specified in 3.1 2 shall be cemented to the seat pan, and shall overlap all edges of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

seat pan not less than ½ inch except where the rubber extrusion bumper is used, then the padding shall overlap the pan not less than ⅛ inch to provide sufficient fullness of cover. The seat shall be covered as specified in 3 2 6

3.3.1.4 *Back* —The tilting back frame shall be as specified in 3.2 5, and shall be mounted to the chair control and provide for a firm mounting of the back rest The back pan shall be as specified in 3.2 3 and shall be flexibly mounted to the back frame so that it will rock with the occupant's back but will stay in a vertical position when the chair is unoccupied. The shredded foam back pad as specified in 3 1 2 shall be cemented to the back pan and shall overlap all edges not less than ½ inch to accomplish well-rounded and padded edges, except where rubber extrusion bumper is used when the padding shall overlap all edges not less than ⅛ inch The back pad shall be covered with the upholstery material as specified in 3 1 3 and applied as specified in 3.2 6

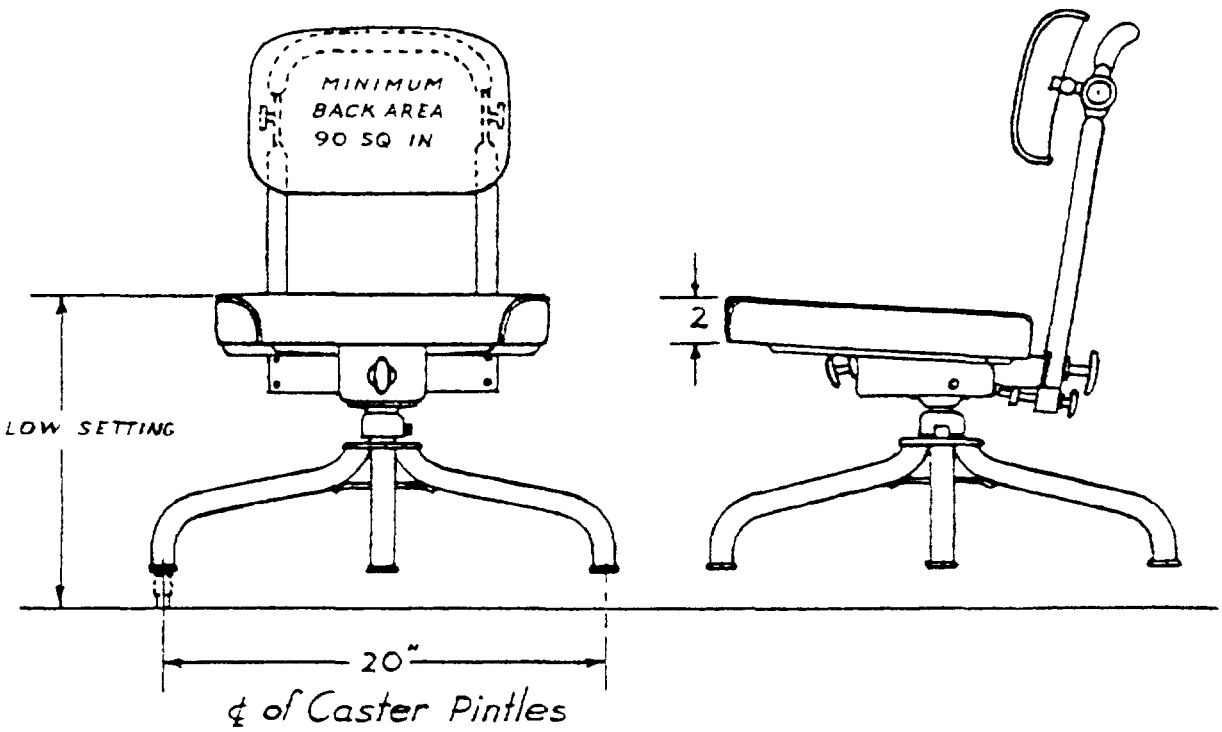



ALL DIMENSIONS ARE MINIMUM

CLASS I

SIZE 1

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.


3.3.2 *Class 2, size 1 chair* —The class 2, size 1 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 2 and as specified herein. The chairs shall withstand the tests as described in 4.3.

3.3.2.1 *Base* —The base shall be as specified in 3.3.1.1 for class 1, size 1, chairs.

3.3.2.2 *Chair control* —The chair control shall be as specified in 3.1.4.1 for class 2 chairs and shall not provide for tilting back adjustment.

3.3.2.3 *Seat* —The seat construction shall be as specified in 3.3.1.3.

3.3.2.4 *Back* —The back shall be as specified in 3.3.1.4 except that it is non-tilting.

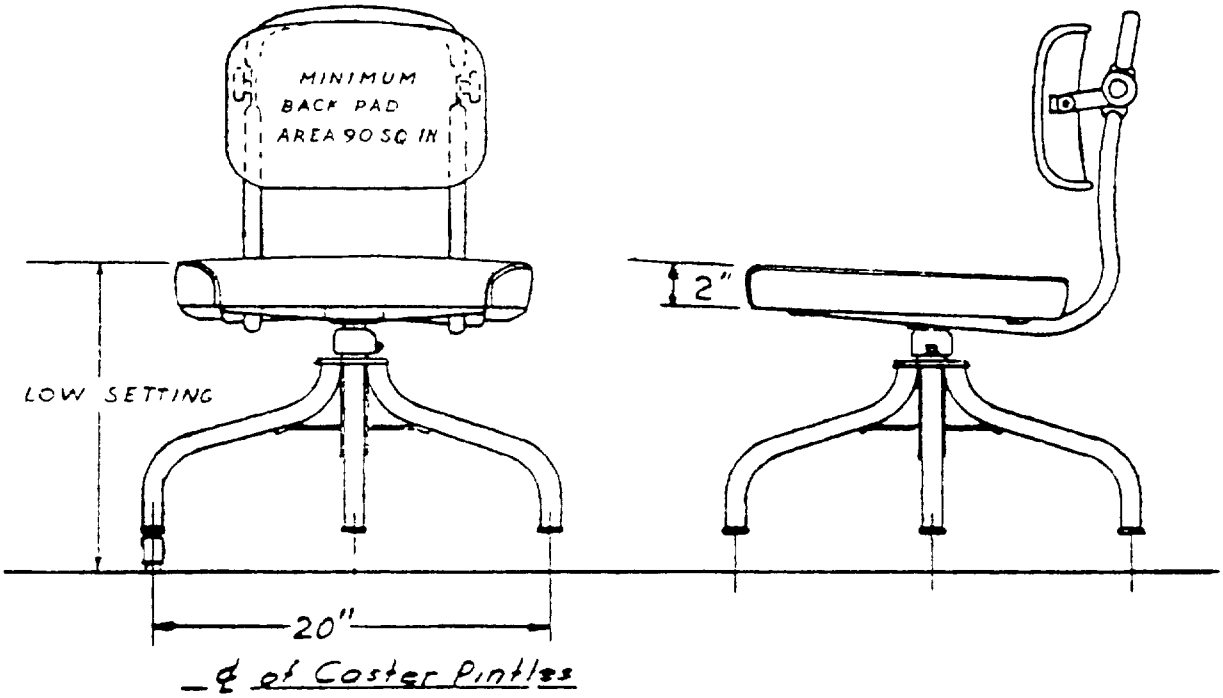



ALL DIMENSIONS ARE MINIMUM

CLASS 2

SIZE 1

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.


3.3.3 *Class 2, size 2 chair* —The class 2, size 2 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 3 and as specified herein The chairs shall withstand the tests as described in 4 3

3.3.3.1 *Base* —The base shall be as specified in 3.2 4 and shall be equipped with glides as specified in 3 1 4.3 and in addition shall have a foot ring of not less than a ¾-inch diameter 20-gage (0.0359-inch) steel tube riveted, welded or brazed to each of the four legs for a foot rest and additional support for the base legs

3.3.3.2 *Chair control* —The chair control shall be the same as specified in 3 1.4 1 for class 2 chairs and shall not provide for tilting back adjustment

3.3.3.3 *Seat* —The seat shall be the same as specified in 3 3.1.3.

3.3.3.4 *Back* —The back shall be as specified in 3 3 1 1 except that it is non-tilting

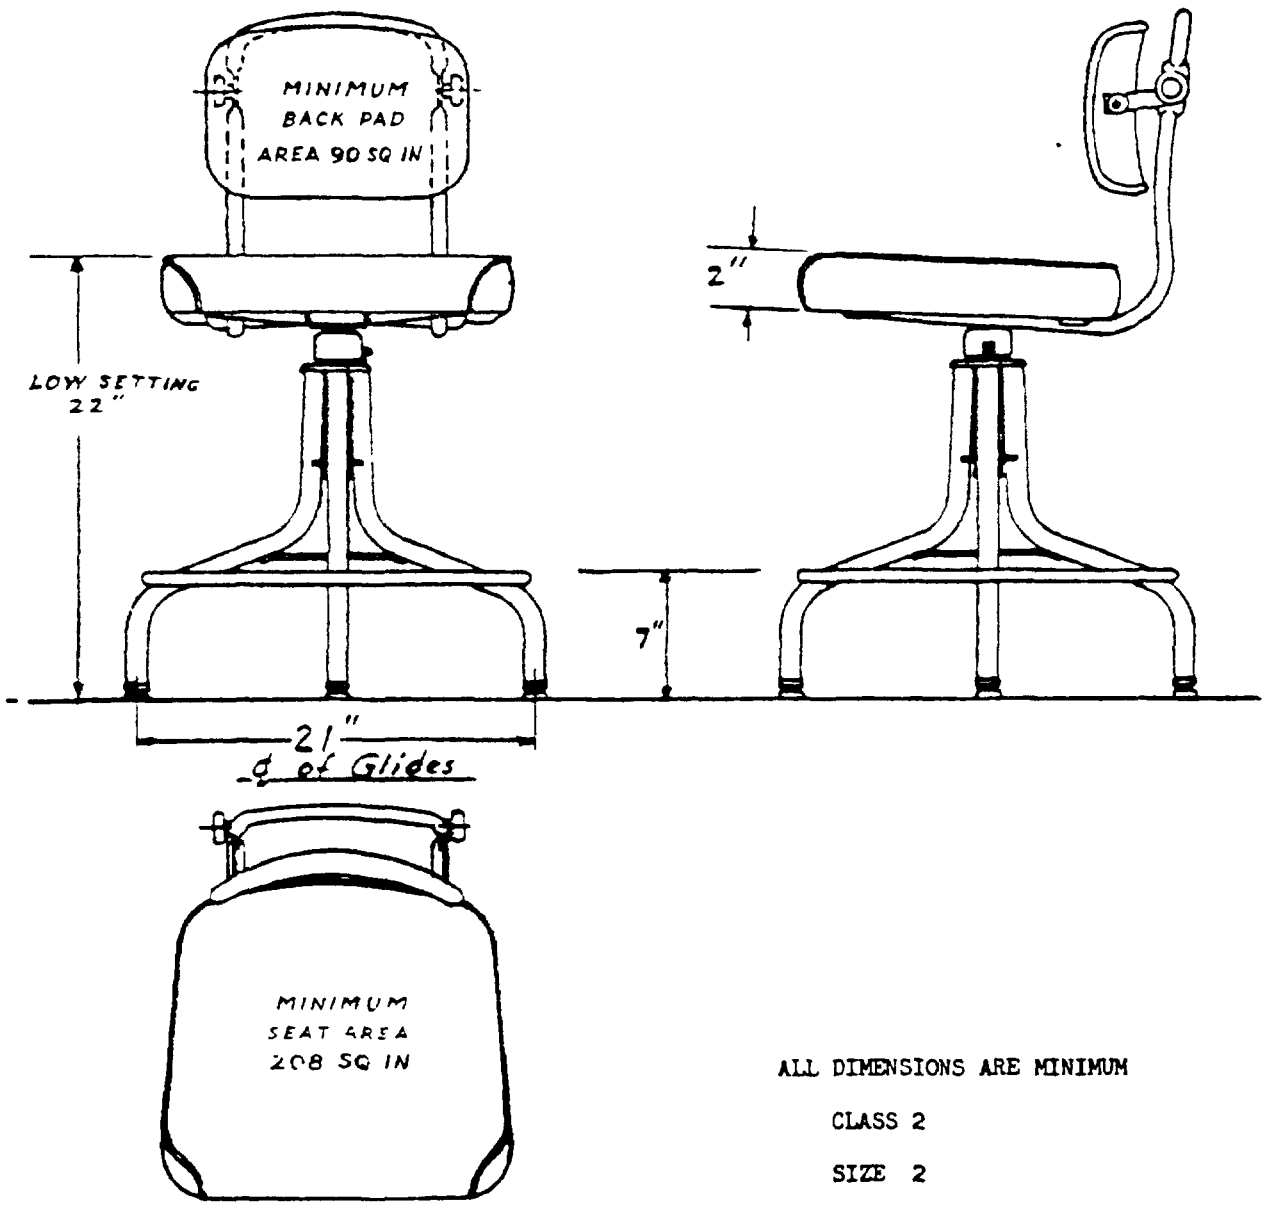

ALL DIMENSIONS ARE MINIMUM

CLASS 2

SIZE 2

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

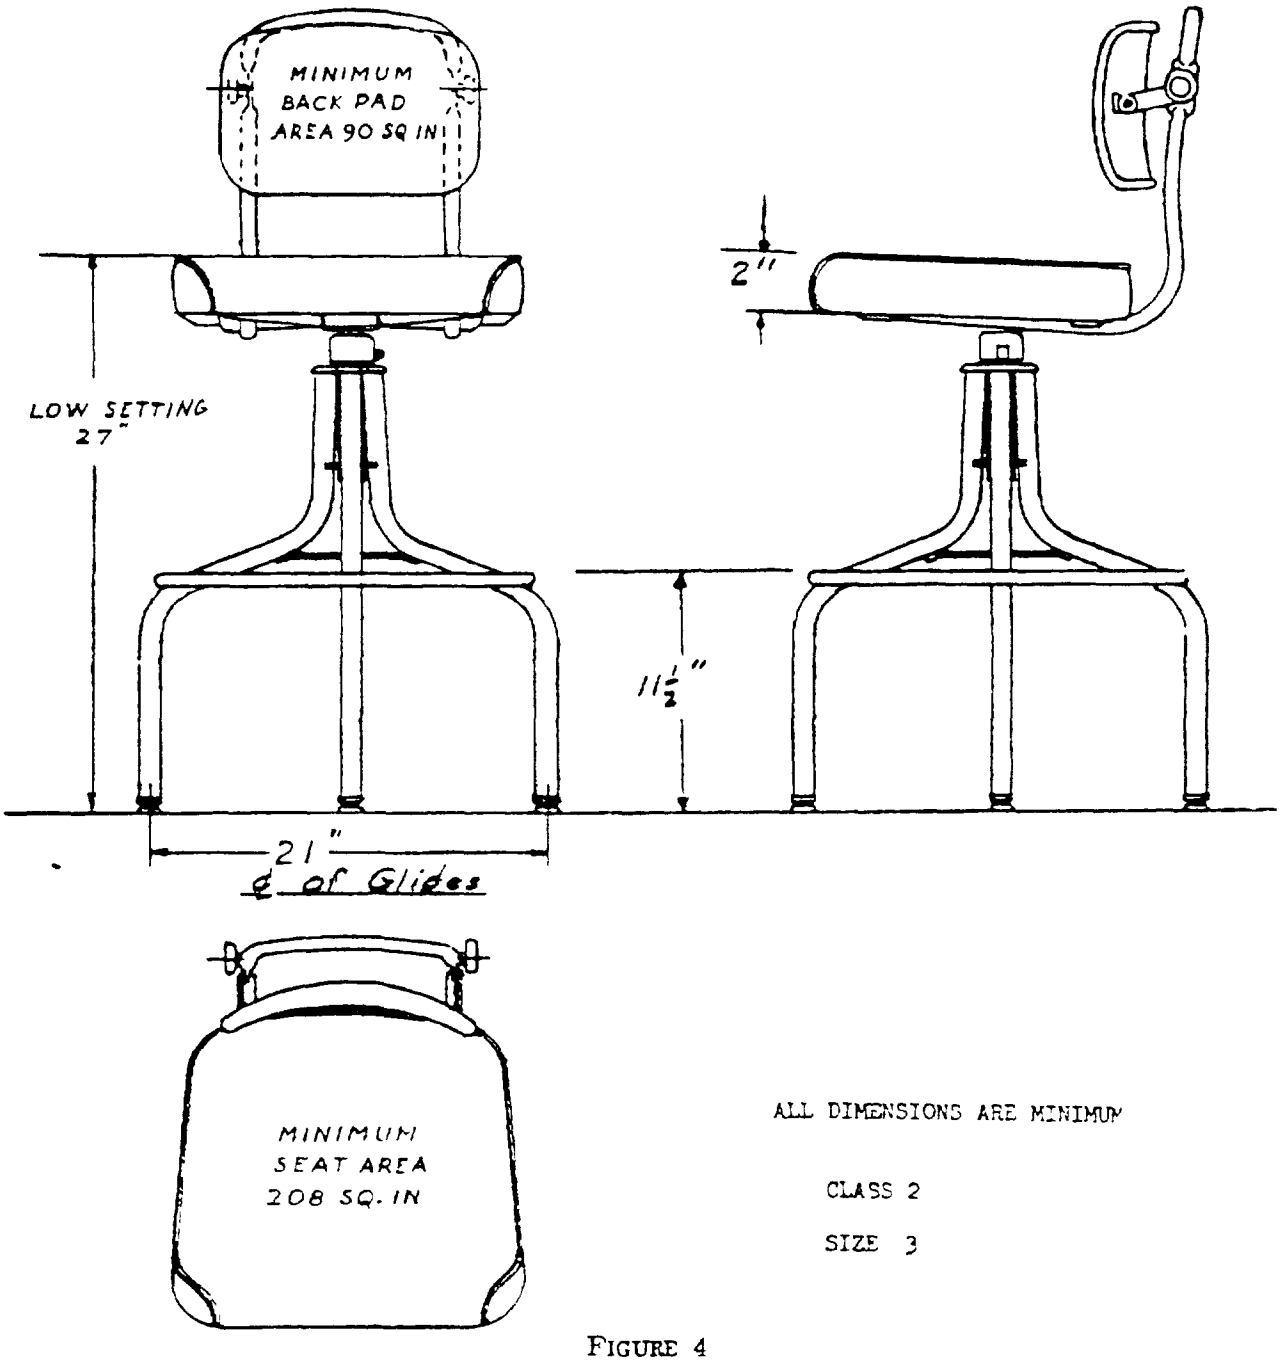


FIGURE 4

3.3.4 *Class 2, size 3 chair*.—The class 2, size 3 chair shall be of the general design and not less in size than the minimum dimensions and seat and back areas shown in figure 4 and as specified herein. The chairs shall withstand the tests as described in 4.3.

3.3.4.1 *Base*.—The base shall be as specified in 3.2.4 and shall be equipped with glides as specified in 3.1.4.3 and in addition shall have a foot ring of not less than ¾-inch diameter 20-gage (0.0359-inch) steel tube riveted, welded or brazed to each of the four legs for a foot rest and additional support for the base legs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.4.2 *Chair control.*—The chair control shall be the same as specified in 3.1.4.1 for class 2 chairs and shall not provide for tilting back adjustment.

3.3.4.3 *Seat.*—The seat shall be the same as specified in 3.3.1.3.

3.3.4.4 *Back.*—The back shall be as specified in 3.3.1.4 except that it is non-tilting.

3.4 Finish.

3.4.1 *Cleaning and enameling of metal parts.*—Chairs shall be given a chemical treatment to provide a phosphate coating or equivalent, over which there shall be one or more coats of synthetic enamel of the color specified sprayed on and oven baked, either convection or infrared, at a temperature and for a period of time as recommended by the enamel manufacturer. The quality, application, drying time, and cleaning shall be controlled to produce a clean, smooth, even film of finish without blisters, pits, grits, wrinkles, runs or tackiness and which shall, when the film is scraped with a knife, peel off in ribbons rather than chip, flake or crack.

3.5 **Identification marking.**—Unless otherwise specified, each chair shall be marked in a plain, permanent, and inconspicuous manner with the date of manufacture, and with the manufacturer's name or trade-mark of such known character that the source of manufacture may be readily determined. When specified, items shall be marked in accordance with Military Standard MIL-STD-130.

3.6 **Workmanship.**—The details of construction, including design, joining, assembly, filling, covering, finishing and marking shall be in strict accordance with the detail requirements of this specification. Any of the above details which are not specified or shown in the figures, shall be in accordance with first-class commercial metal chair practices. Finished chairs shall be neat and shall be free from any defects that affect the appearance or which might affect the lifetime serviceability of the chairs, the safety of the users under hard daily usage, or rough handling in shipping and moving.

4. SAMPLING AND INSPECTION PROCEDURES.

4.1 Sampling for lot acceptance.

4.1.1 *Inspection lot.*—Normally, the inspection lot size shall consist of all units submitted for inspection at one time.

4.1.2 *Sampling for inspection.*—A representative random sample shall be taken from the lot in accordance with table I. Acceptance or rejection of the lot shall be based on the number of defective units found in the sample selected and inspected, as being equal to or less than the specified acceptance number; or, equal to or greater than the specified rejection number of table I:

TABLE I.—*Sampling for visual and dimensional inspection based on—Acceptable Quality Level (AQL) of 2.5 percent*

Lot size	Sample size	Acceptance number	Rejection number
15 and under	3	0	1
16 to 40 .	7	0	1
41 to 110	15	1	2
111 to 300 .	35	2	3
301 to 500 .	50	3	4
501 and over .	75	4	5

NOTE 1.—The Government Inspector may institute tightened or reduced inspection in accordance with Military Standard MIL–STD–105

NOTE 2.—The above is a single sampling procedure Alternate double of multiple sampling procedures or alternate Acceptable Quality levels for different classes of defects may be specified at the discretion of the procuring agency

4.1.3 *Sampling for testing.*—The sample size for test purposes shall be 2 chairs for lots of 100 or less. Five samples shall be tested for lots of more than 100 chairs.

4.2 **Inspection.**—Chairs shall be inspected to determine compliance with this specification, with respect to workmanship, materials, design, details of construction, hardware, finish, tests and marking. Inspection may be made at the factory by a representative of the Government at any time during process of manufacture, or at the point of delivery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.3 Test procedures.

4.3.1 *Base tests.*

4.3.1.1 With casters and glides removed, and the base placed on a surface plate, test the base for rock A 5/64-inch feeler gage shall not enter between any leg and surface plate

4.3.1.2 Remove spindle and chair frame and insert suitable diameter shaft to fit the spindle bearing without play The shaft shall extend at least 12 inches above the bearing top Measure error in perpendicular using square Error should not exceed 1/8 inch in the 12-inch length.

4.3.1.3 Replace spindle and chair frame and with the base resting on the surface plate, measure from bottom of chair seat at each front corner to the surface plate The variation in measurement shall not exceed 1/8 inch

4.3 2 *Base loading test* —Remove casters and spindle and chair frame and place the base supported only at the caster sockets, in universal tester and apply a load of 1,150 pounds The base shall withstand the load without any metal fractures or weld failures and the permanent distortion shall not exceed 1/8 inch Dimensions for distortion shall be taken vertically between the test apparatus platen and the top of the spindle bearing A certified test report from an independent accredited laboratory may be accepted as sufficient evidence for compliance with this test The base used in this test shall be available for inspection

4.3.3 *Completed chair test except with casters or glides removed*

4.3.3.1 With the chair adjusted to its minimum height clamp the base to the floor The seat shall not rock in any direction more than 1/4 inch, at the outermost bottom edge of the seat at any point This test applies to all classes and sizes of chairs

4.3.3.2 *Drop test* —A bag of sand weighing not less than 200 pounds and not more than 12 inches in diameter shall be dropped once into the center of the seat from a height of 6 inches. The permanent distortion shall not exceed 1/4 inch Dimensions to be taken from the floor to the bottom of the seat pan. The drop test shall be made with the seat height set 11/2 inches above the minimum seat height adjustment

4.3.3.3 *Back and tilt test for all chairs* — The chairs shall be clamped to the floor in an upright position by a bar across the front edge of the seat, and the legs shall be restrained from moving A spring dynamometer or an equally effective device shall be attached to the top of the back frame and a back pull applied normal to the slope of the back at all times The chairs shall withstand a load test of 75 pounds without a permanent distortion of more than 1/4 inch.

5. PREPARATION FOR DELIVERY

5.1 **Application** —Subject commodity shall be packaged and packed for domestic shipment (immediate use), domestic shipment (storage), or overseas shipment (commercial or military) as specified (see 6 1)

5.2 **For domestic shipment (immediate use).** — Unless otherwise specified, subject commodity shall be packed in containers, which (together with packaging, wrapping, and inner packing) are acceptable by common or other carriers for safe transportation to point of destination specified in shipping instructions at the lowest transportation rate for such supplies

5.3 **For domestic shipment (storage)** — When specified

5.3.1 *Packaging—classes 1 and 2 all sizes* —When specified each chair shall be reduced to its minimum dimensions, and packaged in a way as to prevent movement Legs, back frame foot ring etc shall be cushioned at all points of contact with the shipping container Cushioning material shall conform to Federal Specification UU-C-843 Cushioning shall be securely tied in place with ties, paper having a minimum basis weight of 60 pounds per

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ream (24 by 36—500), secured in place with gummed paper tape conforming to class 2 of Federal Specification UU-T-111.

5.3.2 *Packing* —Each chair shall be packed into a corrugated fiberboard carton conforming to Federal Specification LLL-B-631, full overlap style, except that the length of the outer flaps may be not less than the inside width of the box minus 1 inch Each box shall be fabricated from double-face corrugated fiberboard having a minimum bursting strength of 275 p.s.i All flaps of the box shall be securely sealed with an adhesive commercially used for the specific product being packed, by application throughout the entire area of contact between the flaps. All seams shall be sealed by the application of 3-inch side gummed paper tape conforming to class 2, Federal Specification UU-T-111.

5.4 **For overseas shipment — commercial export** —When specified, subject commodity shall be packed in containers which, together with packaging, wrapping and inner packing, are acceptable by oceangoing vessels for safe transportation to the points of destination specified in the shipping instructions at the lowest transporation rate for such supplies

5.5 **For overseas shipment — Military.** — When specified

5.5.1 *Packaging* — Packaging shall conform with 5.3.1.

5.5.2 *Packing* —Each chair shall be packed into a nailed wood box constructed and strapped in accordance with style 2, 2½ or 4 of Military Specification JAN-P-106 The interior of each container shall be provided with a case liner conforming to type I or II, grade B or C class 2 Military Specification MIL-L-10547, sealed in accordance with the appendix thereto

5.6 **Marking**—Shipping containers shall be marked in accordance with Military Standard MIL-STD-129 The item name is Chairs, Rotary, Steel Tubular, Special Purpose.

5.6.1 *Special marking.* — The top panel shall be marked as follows:

FURNITURE
FRAGILE, HANDLE WITH CARE
TOP
THIS SIDE UP

In addition, one front panel shall be marked in characters not less than 2 inches high·

UP FURNITURE UP
FRAGILE, HANDLE WITH CARE

6. **NOTES.**

6.1 **Ordering data.**—Purchase documents should specify the color, class and size of chairs required, the kind of upholstery, and should exercise any desired options offered herein and whether the subject commodity is to be packaged and packed for other than domestic shipment (immediate use), (see 1.2.1, 1.2.2, 3.1.3, 3.5, 4 1.2, note 2 and 5.1) Purchase officers should request that certified copies of test results be furnished with the bid.

a. Domestic shipment (immediate use)— which applies to that material required for immediate use without storage or reshipment to a demestic receiving activity not involving seatransportation (see 5.3).

b. Domestic shipment (storage) — which applies to the material for storage and reshipment to a domestic receiving activity not involving sea transportation (see 5.3).

c Overseas shipment—commercial—which applies to that material to be transported by oceangoing or coastwise vessel, accorded normal covered storage at destination or where the end use of the item is to be at the initial receiving activity (see 5 4).

d Overseas shipment — Military — which applies to that material to be transported by oceangoing or coastwise vessel and handled, issued, and stored in the military supply system (see 5.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

6.2 **Figures.**—Figures 1 through 4 form a part of this specification and illustrate the general exterior appearance, design, dimensions and typical features of construction of the classes and sizes of chairs required, and are not intended to preclude the purchase of chairs which are otherwise in accordance with the detail requirements and tests of this specification.

6.3 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects

Patent notice —When Government drawings, specifications, or other data, are used for any purpose other than in connection with a definitely related Government procurement thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

6.4 **Transportation description.**—The proper transportation description, carload and truckload weights to be added are as follows:

Chairs, metallic, revolving, not otherwise indexed by name. (Indicate set-up or knocked down)

In cars 40'9" or less in length, inside measurements

Carload weights, 10,000, 12,000, 15,000, 18,000, 22,000, 30,000 pounds

In cars exceeding 40'9" in length inside measurements

Carload weights 16,000, 18,000, 21,000, 24,000, 30,000, 40,000 pounds

Chairs, metallic revolving, not otherwise indexed

Set-up Truckload weight 10,000 pounds

Knock-down Truckload weight 16,000 pounds

Minimum weights apply when material is transported at classification ratings They will vary when material moves on commodity rates When in doubt consult General Services Administration Regional Traffic Manager

MILITARY INTEREST

Army—Q
Navy—Y MC S
Air Force

Copies of this specification may be purchased for 20 cents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.