AA-F-360
Int. Amendment 1
April 30, 1965

FEDERAL SPECIFICATION

FILING CABINETS, STEEL, MAP AND PLAN, (SECTIONAL)

This Interim Amendment was developed by Federal Supply Service, General Services Administration, Washington, D. C. 20407, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized Federal agencies to use this Interim Amendment as a valid exception to Federal Specification AA-F-360(GSA-FSS).

Paragraph 1.2.2 Color of Finish Delete entire paragraph and substitute:

"Unless otherwise specified, the color of the cabinets shall be gray, color No. 26134 of Federal Standard 595. (Color chip No. 26134, Gray, of Federal Standard 595 is obtainable from Business Service Center, General Services Administration, Federal Supply Service, Washington, D. C. 20407 or from Business Service Center of the nearest GSA Regional Office)"

Paragraph 2.- Under "Federal Specification", add the following

"QQ-P 416 - Plating, Cadmium (Electrodeposited).

QQ-Z-325 - Zinc Coating, Electrodeposited, Requirements For"

Paragraph 3.1.1 - Steel TABLE I - 10th item from the top of the table. Delete "Drawer sides or rails - 16 - .0598" Substitute "Drawer rails - 16 - .0598" 11th item from the top of the table. - Delete Drawer bottom or body - 22 - .0299".

Paragraph 3.1.2.1 - Face hardware. Second line delete "or lacquered" add to end of paragraph "The various finishes shall not be intermingled on any one cabinet"

Paragraph 3.1.2.2 Drawer pulls - Line 3, Starting with "The pulls shall", delete remainder of paragraph and substitute the following

"They shall be of the design and dimension shown in figure 3, with the exception that pulls with threaded studs for mounting may be used provided the ends of the studs are recessed behind the face of the inner head when mounted on the drawers. Stamped pulls will not be permitted. All surfaces and edges shall be smooth and free of roughness discoloration and sharp edges. Pulls shall be securely attached onto the drawer fronts."

Paragraph 3.1.2.3 Label holders - Line 4, delete last two sentences and substitute the following

"The label holder shall be secured to the drawer front by not less than three screws, three rivets and lockwashers, or by crimping three lugs. These attachments are to be on the sides and bottom of the label holder and shall secure the label holder without vertical or horizontal movement. Alternatively the label holder shall be of not less than .047 inch (0.047 inch) steel spotwelded to the drawer front and finished in the same manner as the drawer front. All outside corners and edges of the label holder used shall be free of burrs roughness and sharpness. All label holders shall readily accommodate a card 4 inches long by 1-1/4 inches high.

Paragraph 3.1.2.5 Rollers - 4th line Delete "3/16 inch" Substitute "1/4 inch" For and 8th line, delete entire last sentence, substitute: "Fixed type rollers shall be the type which are designed to be hammered or riveted into position and shall be so applied. All rollers shall be case hardened."

FSC 711

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

Paragraph 3.1.2.6 Bolts, nuts and screws Line 3. Delete "or cadmium plated.", and substitute the following:

"plated in accordance with Type I, Class 3 of QQ-Z-325 or cadmium plated in accordance with Type I, Class 3 of QQ-P-416."

Line 3. Delete last sentence of paragraph.

Paragraph 3.1.3.2 Enamel. - Delete entire paragraph, substitute: "The enamel for finishing shall be in accordance with the manufacturer's commercial practice, except the color shall be as specified in 1.2.2.

Paragraph 3.2.1.1 Standard Intermembering Features. - Line 7. After the word "sides". delete "the opposite sides' and substitute 'the other two sides."

Paragraph 3.2.2 Assembly. 3rd, 4th and 5th lines. delete '.....be those presently used in regular commercial production that will' and substitute' 'conform to the provisions and meet test requirements specified in MIL-W-12332 to' and add to end of paragraph. "All exposed welds or other marks shall be filled and/or ground smooth. All welds that would interfere with proper nesting of sections shall be ground smooth. Each section shall be completely and properly assembled. No parts shall be shipped loose unless specifically authorized herein or by the contracting officer."

Paragraph 3.2.3.1 Tolerances. Delete period at end of paragraph and add 'unless otherwise specified herein'.

Paragraph 3.2.4 Unit 1, base. Delete paragraph in its entirety and substitute

"The bases shall be flush type of one open-frame design similar to figure 1 and shall be formed from steel specified in 3.1.1, of the minimum gages shown in Table I and to the dimensions shown in Table II. All base bottom edges shall be flanged inward not less than 5/8 inch with the bottom surfaces and edges level and smooth. The ends of all top and bottom horizontal flanges shall be mitered and all corners shall be anchored in true 90° positions by spot welding corner gussets to the inside surfaces of both top and bottom horizontal flanges. These gussets shall be 4 inches long or each leg shall fit snugly into the corner and shall be secured by not less than 4 spot welds to the flanges along each leg. Base frame joints shall be at the rear or ends of the base and shall be reinforced on the inside by 16 gage (0.0598 inch) steel backing angles not less than 3-1/2 inches high which shall be securely welded in place. These angles may be in the form of flanges on the ends of base pieces or they may be separate angles. All joints visible from front or side view and all seams visible after units have been attached are to be welded, brazed or filled and ground smooth in such a manner as to insure they will not crack or fracture from the weight of the units being stacked upon the base or from the stress and strain of every day use. A reinforcing stretcher shall be provided in the center of each base, running from side to side or from front to rear. This stretcher shall be flanged top and bottom not less than 1-1/2 inches and shall extend between and weld to the upper and lower horizontal flanges of the sides of the base. The top of the base shall be flanged inward 3/4 inch horizontally and not less than 5/16 inch nor more than 7/16 inch vertically to serve as the intermembering member."

Paragraph 3.2.5 Unit 2, Five drawer section. - Line 11 After the word 'overlap' add 'not less than 2-1/4 inches in each direction.'

Line 12 After the word "frame" delete period and add "securely weld in not less than 4 spotwelds."

Paragraph 3.2.5.1 Drawers - Line 7 to 12 Delete sentences 2 thru 7 inclusive and substitute the following:

"The drawer front shall be of double wall construction. All four edges of the outside front shall have channel formations of equal width. The two sides and bottom edges shall have an additional 90° flange to provide for welding to the drawer body. The four corners of the outside head shall be neatly closed with no sharp edges and the two top corners shall be brazed and ground smooth along the entire mitered seam. The inside drawer front shall be flanged and offset along the top edge to snugly intermember with the top channel of the outside drawer front. The drawer bottom shall be of not less than 20 gage (0.0359 inch) steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Paragraph 3.2.5.1 Drawers.(Cont'd)

Alternatively, the drawer bottom may be of not less than 22 gage (0.0299 inch) steel provided it is embossed with not less than 2 ribs (5/8 inch wide by 1/32 inch deep, minimum). The ribs may extend front to rear, dividing the drawer bottom in three equal parts or they may extend diagonally corner to corner. The length of the ribs shall be the maximum possible while allowing necessary flat area for forming and welding The inside front, bottom and back may be formed of one piece of steel or the bottom and sides may be formed of one piece of steel

Line 21 Delete entire sentence starting "The drawer..... ' and substitute the following:

"The drawer back and hood shall be of one piece of steel The hood shall be not less than 2 inches wide and flanged in or the horizontal ends for spotwelding to the drawer sides The front edge of the hood shall have a flat fold unless a cover is attached as specified in 3.2 5.3. Alternatively the hood may be a separate piece, spotwelded to the drawer back provided all other requirements in this paragraph are satisfied.

Paragraph 3.2.5.2 Drawer compressor - Line 1. Delete the words 'unless otherwise" and substitute the word "when'.

Top of page 6, line 2 Delete the word "four' and substitute the word 'five'

Top of page 6, line 3 Delete the word "two and substitute the word "three'.

Top of page 6, line 5 After the word "bead' add a coma and the words "flat fold'

Paragraph 3.2 5 3 Drawer covers - Line 3, delete the word 'compress and .

Line 4 After the word "from" insert the word 'dust".

Lines 5 - 9. Delete entire sentence and substitute the following:

"The front edge of the cover shall have a full width, angle-shaped steel finger grip piece made of not less than 16 gage. (0.059[illegible] inch) steel The front or finger grip leg shall be not less than 1/2 inch long and the other leg shall be not less than 2-1/2 inches long, (finished dimensions). There shall be two studs mounted on the 1 2 inch flange which shall slide into two slots in the inner head to hold the cover in position. The finger grip piece shall be free of sharp corners, and rough or sharp edges.

Line 15. After the word "The' insert 'sides of the'

Line 17 After the word 'and' insert "the front and rear of the covers shall be'

Line 17 Delete 'or equivalent provision and add a period after the word 'hood'

Paragraph 3.2.5 Drawer suspension, lines 8 and 9. Delete "Operation shall be efficient for the purpose intended , substitute 'shall be the roller - channel type shall operate smoothly and efficiently and shall be expected to provide satisfactory service through the normal life expectancy of the cabinet '

Line 1 . After the word 'of' delete the word "the' and substitute '16 gage (0.0598 inch)'

Third line from top of page 6 Delete last two sentences of paragraph and substitute the following

[illegible] channel during operation of the drawer.
The case suspension channels shall be formed from not less than 16 gage (0 0598 inch) steel, and shall be securely welded to the vertical members of the case frame In-stops and out-stops shall be provided for the drawers. All parts directly engaged in the stopping action shall be of not less than 16 gage (0.0598 inch) steel. In-stops shall be provided with rubber bumpers. Dimensional clearance between suspension channels and drawer rails shall be kept to a minimum to reduce horizontal and vertical play between them as much as possible without inducing a drag or binding condition. Drawers shall be removable from the case."

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

Paragraph 3.3 Finish. Line 6, delete entire sentence beginning with the words "The minimum...." and substitute: "The minimum total film thickness of enamel on front, sides, and top exterior surfaces shall be not less than 1.4 mils and the minimum total film thickness of enamel on back exterior surface and all interior surfaces shall be not less than 0.6 mil."

Line 11. Delete entire sentence beginning with the words "Special attention.....".


Add the following paragraph:


"Paragraph 4.3.3 Drawer interference test.- The drawer fronts shall not touch each other at any point of extension, up to and including full extension, when adjoining drawers are opened or closed at the same time."

Paragraph 6.1 Ordering Data - Line 3. After the word "covers" insert the word 'compressors

GSA "L 65 17113

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

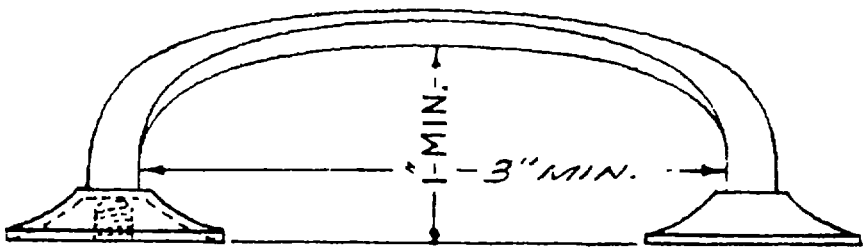

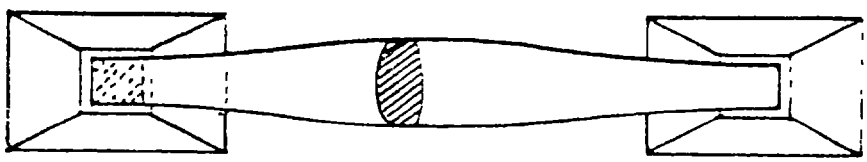

DRAWER PULL

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.