AA-F-00360A(GSA-FSS)
November 5, 1971
INTERIM REVISION OF
Fed. Spec. AA-F-360
March 14, 1956

INTERIM FEDERAL SPECIFICATION

FILING CABINETS, STEEL, MAP AND PLAN, (SECTIONAL)

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-F-360, dated March 14, 1956.

1 SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers steel sectional map and plan filing cabinet units which join with other units of the same size and stack vertically.

1.2 Classification.

1.2.1 Units and sizes. The sections shall consist of the following units and sizes as specified (see 6.2):

Unit 1 - Base sections

Size 1. For drawings up to 36 inches by 24 inches.
Size 2. For drawings up to 42 inches by 30 inches.
Size 3. For drawings up to 48 inches by 36 inches.

Unit 2 - Five-drawer sections

Size 1. For drawings up to 36 inches by 24 inches.
Size 2. For drawings up to 42 inches by 30 inches.
Size 3 For drawings up to 48 inches by 36 inches.

Unit 3 - Top section

Size 1. For drawings up to 36 inches by 24 inches.
Size 2. For drawings up to 42 inches by 30 inches.
Size 3. For drawings up to 48 inches by 36 inches.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

L-P-378 - Plastic Sheet and Strip, Thin Gauge, Polyolefin.
FF-N-105 - Nails, Wire, Brads and Staples.
QQ-R-571 - Rods, Welding, Copper and Nickel Alloys.
QQ-S-781 - Strapping, Steel, Flat and Seals.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
PPP-B-636 - Box, Fiberboard.
PPP-C-843 - Cushioning Material, Cellulosic.
PPP-F-320 - Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.
PPP-S-760 - Strapping, Nonmetallic, (and Connectors).

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 187 - Identification of Pressed Bends, Forms, Seams and Joints (Sheet Metal).
Fed Std. No. 595 - Colors.
Fed. Std. No. 751 - Stitches, Seams and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies)

Military Specifications

MIL-H-9884 - Honeycomb Material, Cushioning Paper.
MIL-W-12332 - Welding, Resistance, Spot and Projection, for Fabricating Assemblies of Low Carbon Steel.

Military Standards

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking for U. S. Military Property
MIL-STD-731 - Quality of Wood Members for Containers and Pallets.

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Steel Products Manual, Carbon Steel Sheets.

(Application for copies should be addressed to American Iron and Steel Institute, 150 East 42nd Street, New York, New York 10017.)

National Motor Freight Traffic Association, Incorporated, Agent

National Motor Freight Classification.

(Application for copies shall be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N.W., Washington, D. C 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 202 Union Station, 516 W Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity and each component part on contract shall be submitted or made ready for the contracting officer or his authorized representative to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2 Material. All materials used shall be as hereinafter specified. They shall not have been used previously in their present state. Materials shall be free from defects which affect serviceability or appearance of the finished product.

3.2.1 Steel. Commercial quality cold rolled or cold rolled oiled steel, either of which shall have a stretcher leveled standard of flatness, shall be used for the base, top panel, end panels, back panel, drawer sides, drawer fronts, and may be used throughout. "Commercial quality" and "stretcher leveled standard of flatness" shall be as defined in the Steel Products Manual. When cold rolled steel is not used throughout, the steel used for parts other than those specified above, shall be hot rolled oiled, hot rolled pickled and oiled, or hot rolled annealed. The thickness of steel to be used for individual parts shall be as given in table I and in the applicable paragraphs of this specification and are the minimum thicknesses permitted except the decimal equivalent shown for gages are subject to the tolerances given in the Steel Products Manual. The steel shall be smooth, free of rust, loose scale, pits, scratches, laps, crimps and buckles. The sheet steel used for parts to be formed shall withstand the bend test specified in 4.5.2.

TABLE I. Thickness of steel for individual parts

Parts	Gage (minimum)	Decimal Equivalent (inches)
Front vertical members	14	0.0747
Back vertical members	14	.0747
Intermediate vertical members	16	.0598
Horizontal end members	16	.0598
Horizontal front members	14	.0747
Horizontal back members		
Size 1	18	.0478
Sizes 2 and 3	14	.0747
End panels	20	.0359
Back panel	22	.0299
Case suspension channels	16	.0598
Drawer rails	16	.0598
Drawer bottom		
Not embossed	20	.0359
Embossed	22	.0299
Drawer sides	As specified in 3.3.7.1	
Drawer back	22	.0299
Drawer hood (unless integral with drawer back)	16	.0598
Inside drawer front	22	.0299
Outside drawer front	20	.0359
Top panel	18	.0478
Top reinforcements	16	.0598
Base frame	16	.0598
Gussets	16	.0598
Stretcher	16	.0598

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.2 Hardware.

3.2.2.1 Face hardware. Except as otherwise specified herein, the face hardware shall be one of the following: Satin finished, anodized aluminum; Type 302 corrosion resistant steel; or satin chromium plating on steel or on die cast zinc, brass or bronze. Tensile strength of die cast zinc shall be not less than 40,000 p.s.i.

3.2.2.1.1 Drawer pulls. The drawer pulls shall be one of the materials and finishes specified in 3.2.2.1. Their design and dimensions shall be as shown in figure 1. The ends shall terminate in uninterrupted 1/4-20 threads. Stamped pulls will not be permitted. All surfaces and edges shall be smooth and shall be free of roughness and sharpness. Pulls shall be securely attached by means of solid nuts and lockwashers. All threads of the nuts shall engage the threaded ends of the pull. No part of the attachment shall project beyond the drawer front.

3.2.2.1.2 Label holders. Except as specified below, the label holders shall be of one of the materials and finishes specified in 3.2.2.1 and shall be constructed of material at least 0.0359 inch thick. The label holders shall be secured to the drawer front by not less than three screws, three nuts and lockwashers or by crimping three lugs. These attachments shall be on the sides and bottom of the label holder. They shall prevent vertical or horizontal movement of the label holder. Alternatively, the label holder shall be of not less than 18 gage (0.0478 inch) steel, spotwelded to the drawer front and finished in the same manner as the drawer front. All outside corners and edges of the label holder furnished shall be free of burrs, roughness and sharpness. Label holders shall readily accommodate cards at least 6 inches wide by 1-1/4 inches high by 0.05 inch thick.

3.2.2.1.3 Locks. When specified, (see 6.2), drawer sections shall be equipped with automatic unit locks. The locking mechanism shall be controlled by a key lock, keyed for paracentric keys, which shall have not less than four pin tumblers and not less than 200 key changes. The face of the lock shall be of the material specified in 3.2.2.1, or alternatively shall be dull nickel finish on die cast zinc. The face shall extend beyond the outer front surface of the section not less than 1/16 inch or more than 1/8 inch when in the locked position. The locking mechanism shall be secured to the inside of the section in a manner to retain the lock in the prescribed position and provide ease of operation of lock and locking mechanism. Two keys shall be supplied with each lock. The locking mechanism shall be so constructed that drawers left open when section is locked may be closed and positively locked, without unlocking the section and without distorting the locking mechanism.

3.2.2.2 Rollers. Fixed type drawer rollers which are attached to the drawer or the case shall be the anti-friction ball bearing type not less than 1 inch in diameter with not less than a 1/4 inch face. Floating type drawer support rollers, if used, shall be not less than 1/2 inch diameter and not less than 5/16 inch thick. Fixed type rollers shall be the type which are designed to be hammered or riveted into position and shall be so affixed. All rollers shall be case hardened.

3.2.2.3 Fastening devices. Bolts, nuts, screws and similar fastening devices used for necessary mechanical joints shall be made corrosion-resistant in accordance with the fastening device manufacturer's commercial practice.

3.2.3 Finishing materials.

3.2.3.1 Primer. The primer when used, shall be compatible with the finishing enamel used.

3.2.3.2 Enamel. Enamel for the finishing shall be the baking type and shall be the manufacturer's standard product except that the color shall be as specified in 3.2.3.2.1.

3.2.3.2.1 Finishing enamel color. The color of the finishing enamel shall be gray, color chip No. 26134 of Fed. Std. 595 (see 6.3).

3.3 Construction.

3.3.1 Design. The design of the tops, bases and five drawer units shall be similar to that shown in figure 2. The drawer sections, bases and tops shall be provided with the specified interjoining features so that any contractor's products can be securely stacked.

3.3.1.1 Standard interjoining features. To permit the interjoining of any contractor's products, flanges of the dimensions specified in table II shall be provided on all four sides, or on either of the two opposite sides on any interjoining section. If interjoining flanges are provided on only two sides, the other two sides shall be free of obstructions that would prohibit interjoining with specified flanges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.2 Welding and brazing. (see definitions in 6.5)

3.3.2.1 Spot welding. Spot welds shall not be closer to the edge of either adjoining member than 1/2 the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds that will meet the test specified in 4.5.4. All depressed or protruding spot welds on exposed surfaces of sections and any other spot weld that would interfere with proper nesting of sections shall be filled and sanded or ground smooth. Spot welds shall be centered not more than 4 inches apart.

3.3.2.2 Brazing. When brazing is used in lieu of welding (where permitted) the brazing method shall include the use of a nickel bronze rod conforming to type I, class RCuZn-D of QQ-R-571 and having a minimum tensile strength of 70,000 p.s.i.

3.3.3 Sheet metal formations. Sheet metal formations specified herein shall conform to the illustrated nomenclature in Fed. Std. 187. The bends and folds in the formations specified are the minimum number of bends and folds permitted. Additional bends and folds which do not impair the utility of the end item, or detract from its appearance are permissible.

3.3.4 Assembly. Assembly of parts shall be by welding unless impractical. Assembly methods and procedures shall provide rigid units with no parts that will work loose when subjected to shipping, storage and usage under normal daily operations during the lifetime of the units. Each section shall be completely and properly assembled by the contractor. No parts shall be shipped loose.

3.3.5 Dimensions. All sections shall be in strict accordance with the dimensions specified in table II and the tolerances specified herein.

TABLE II. Dimensions (inches)

Item name	Overall (exposed)			Inside drawer			Standard Interjoining Components		
	Width	Depth	Height	Width	Depth	Height	Horz. Flange top	Horz. Flange bottom	Vert. Flange
Base section									
Size 1	40-3/4	28-7/16	4	..	..	..	3/4	..	5/16
Size 2	46-3/4	35-7/16	4	..	..	..	3/4	..	5/16
Size 3	53-3/4	41-7/16	4	..	..	..	3/4	..	5/16
Five drw. sec.									
Size 1	40-3/4	28-7/16	15-3/8	37	26	1-15/16	3/4	5/8	5/16
Size 2	46-3/4	35-7/16	15-3/8	43	32	1-15/16	3/4	5/8	5/16
Size 3	53-3/4	41-7/16	15-3/8	49	38	1-15/16	3/4	5/8	5/16
Top section									
Size 1	40-3/4	28-1/4	3/4	..	..	..	..	5/8	none
Size 2	46-3/4	35-1/4	3/4	..	..	..	..	5/8	none
Size 3	53-3/4	42-1/4	3/4	..	..	..	..	5/8	none

3.3.5.1 Tolerances. A plus or minus tolerance of 1/16 inch will be permitted in the overall widths and depths. The overall heights and inside drawer dimensions are minimum. Unless otherwise specified herein, a tolerance of plus or minus 1/16 inch will be permitted in the horizontal and vertical interjoining flanges

3.3.6 Unit 1, base. The base shall be the flush type of open-frame design similar to figure 2, and shall be formed from the steel specified in 3.2.1, of the minimum gage shown in Table I and to the dimensions shown in Table II. All base bottom edges shall be flanged inward not less than 5/8 inch with the bottom surfaces and edges level and smooth. The ends of all top and bottom flanges shall be mitered and all corners shall be anchored in true 90 degree position by spotwelding corner gussets to the inside surfaces of both top and bottom horizontal flanges. These gussets shall be 4 inches long on each leg, shall fit snugly into the corner and shall be secured to the flanges by not less than four spot welds along each leg. Base frame joints shall be at the rear or ends of the base and shall be reinforced on the inside by 16 gage (0.0598 inch) steel backing angles not less than 3-1/2 inches high which shall be welded in place. These angles may be in the form of flanges on the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ends of base pieces or they may be separate angles. Welding at joints shall be accomplished in a manner to insure that they will not crack or fracture from the weight of the units being stacked upon the base or from the stress and strain of everyday use. The base shall be reinforced by a stretcher in the center having not less than 1-1/2 inch flanges at its top and bottom. It may extend from side-to-side or from front-to-rear. It shall be welded to the inside surfaces of the top and bottom horizontal flanges of the base. The top of the base shall be flanged inward 3/4 inch horizontally and not less than 5/16 inch nor more than 7/16 inch vertically to serve as the interjoining member.

3.3.7 Unit 2, five-drawer section. The drawer section shall consist of the case and five drawers. The case frame shall consist of two front vertical members, two back vertical members, two intermediate vertical members, two top horizontal end members, two bottom horizontal end members, one top front horizontal member, one bottom front horizontal member, one top back horizontal member and one bottom back horizontal member. The front vertical members shall be a panel formed channel formation and the rear vertical members shall have at least one 90 degree bend. The widths of the front vertical members and back vertical members before forming shall be at least 6 inches and 4-1/2 inches respectively. The width of all horizontal members, before forming, shall be at least 4 inches. Horizontal members shall be flanged as specified in 3.3.1.1, and as shown in details "A" and "B" of figure 2 for interjoining with other units when stacked one above the other. The frame members shall be of the gage of steel specified in table I and shall be securely welded together. They shall overlap not less than 2-1/4 inches in each direction, or be reinforced by gussets and shall be securely held by not less than five spotwelds equally spaced. Panels shall be of the gage of steel specified in table I and shall be flanged to overlap the frame at the top and bottom edges. Vertical joints of the case shall be nested, flanged or offset to present a flush condition and a smooth finished appearance. Panels and frame shall be welded securely together.

3.3.7.1 Drawers. The appearance of the drawers shall be similar to the illustration in figure 1. The dimensions shall be as specified in Table II. They shall be formed of the gage of steel specified in Table I and in this paragraph and be reinforced, shaped and welded into a rigid unit which will not warp, twist, sag or bind in operation. Drawer fronts shall be flush with, or shall inset the vertical edges of the drawer section case front not more than 1/8 inch. The fronts shall be of double wall construction. The top edge of the outside front shall be formed into a return flange to receive the inside drawer front. The side and bottom edges shall be formed into a return flange and an additional 90 degree flange of not less than 1/2 inch to provide for welding to the drawer body. The formed width of the four drawer front edges shall not vary more than 1/32 inch (see figure 3). The four corners of the outside head shall be neatly closed with no sharp surfaces and the two top corners shall be brazed and ground smooth along the entire mitered seam. The inside drawer front shall be flanged and offset along the top edge to fit snugly into the top channel of the outside drawer front. The drawer bottom shall be of not less than 20 gage (0.0359 inch) steel. Alternatively, 22 gage (0.0299 inch) steel may be used for the bottom provided it is embossed with at least two ribs 5/8 inch wide by 1/32 inch deep (minimum dimensions). The ribs may extend front to rear or corner to corner. When extending front to rear, they shall be the same distance from each side of the drawer and the center spar between them shall be not greater than 17 inches. The length of the ribs shall be the maximum possible after allowing the flat area necessary for forming and welding. The inside front, bottom and back may be formed from a single piece of steel, or a single piece of steel may be used to form the bottom and sides. The top of the drawer sides may serve as the drawer rail. This shall be accomplished by forming the top of the side into a channel or a roll that fits over ball bearing rollers. This formation shall extend at least 1/4 inch below the top of the roller but it shall not touch the roller stud. The width of the formation shall be 1/2 inch with a tolerance of plus or minus 1/32 inch. The measurement shall be taken from the bottom edge of the formation to the side of the drawer. Alternatively, the top of the drawer sides may have a single 1/2 inch wide (minimum), 90 degree flange to serve as a drawer rail, however, when the case suspension channels are attached to an unsupported leg (i.e. leg not touching any part of the section) of the back vertical frame members they shall extend to or beyond the bend of the back frame member unless an additional 16 gage (0.0598 inch) reinforcement with at least one 90 degree bend is welded inside of the back vertical frame formation. The reinforcement shall be of sufficient length to back up all five suspension members. It shall brace the back vertical frame formation in a manner that makes it certain that the back vertical frame member will retain its shape during shipment as well as during the entire service life of the section. When the top of the drawer sides serve as the drawer rail the sides shall be of not less than 16 gage (0.0598inch) steel. If the drawer rails are applied (see 3.3.7) minimum 22 gage (0.0299 inch) steel may be used for the sides. In this case the sides shall be formed for strength and the elimination of sharp exposed surfaces and edges. When sides and bottom are not of a single piece of steel, the bottom edge of the sides shall be flanged inward for welding to the drawer bottom. The drawer back and hood may be a single piece of 22 gage (0.0299 inch) steel or the hood may be a separate 16 gage (0.0598 inch) piece spotwelded to the drawer back. The horizontal ends of the hood

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

shall be spotwelded to the drawer sides or drawer side members, as applicable. The horizontal ends shall be not less than 1-1/2 inches wide. Except at the ends, the overall width of the hood shall be not less than two inches. Its front edge shall have a formation which eliminates sharp edges when the cover in accordance with 3.3.7.2 is not a requirement and may have such a formation when the cover is required. Each drawer shall be equipped with two pulls as specified in 3.2.2.1.1 and one label holder as specified in 3.2.2.1.2. The drawer shall withstand the tests specified in 4.5.1.2.

3.3.7.2 Drawer covers. Unless otherwise specified (see 6.2) all drawers shall be provided with a waterproof coated fabric cover which shall prevent the drawer contents from curling, and protect them from dust and from damage during opening and closing of drawers. The front edge of the cover shall have a full width flanged finger grip piece with a minimum 1/2 inch face (vertical flange) and minimum 1-1/2 inch bottom (horizontal flange). These are finished dimensions. The piece shall be of not less than 24 gage (0.0239 inch) steel. the finger grip edge (i.e. top edge) of the piece shall be formed to a closed fold or closed bead. There shall be two studs mounted on the 1/2 inch face which slide into slots in the inner head and hold the cover taut and in position. The finger grip piece shall be free of sharp corners and rough or sharp edges. The covers shall be of the following material. The weights listed are minimums.

43 inch	3.20 sheeting or drill	4 ounces per square yard.
45 inch	3.12 sheeting or drill	3.9 ounces per square yard.
54 inch	2.25 drill	4.3 ounces per square yard.

The fabric covers shall be coated with compounded synthetic rubber or waterproof plastic coating to a total dry weight of not less than 9 ounces per square yard. The sides of the cover shall be stitched in accordance with stitching type EFa (turning the edge and stitching turned portion to body of material) of Fed Std No. 751. Stitching shall present a neat appearance with true, even lines. The front and rear of the covers shall be clinched into the steel finger grip piece and into the front edge of the rear hood.

3.3.7.3 Drawer compressors. When specified (see 6.2) the front of all drawers shall be equipped with a link hinge type compressor or paper weight in lieu of drawer covers. The compressor shall be formed of not less than 20 gage (0.0359 inch) steel and be designed to lay flat at all compressing positions, and shall fold clear of the drawer to permit convenient filing. The compressor shall be the full width of the drawer, minus approximately one inch, and shall extend into the drawer not less than five inches. The flat part of the compressor shall be not less than three inches wide after forming the front and back edges into a bead, roll, or flat fold.

3.3.7.4 Drawer partitions and drawer compartments. When specified (see 6.2) steel partitions that divide the drawers into 2,4,6, or 8 compartments as required shall be furnished. Each compartment shall have a rear hood and each shall accommodate the same number of drawings that an undivided drawer would accommodate. The partitions shall be secured easily through holes punched in the bottom of the drawer, and shall be removable easily. Holes may be punched for partitions when partitions are not specified, but this is not a requirement. The partition that divides the drawer into 2 compartments shall be parallel to the drawer sides (extend from front to rear) An additional partition that is parallel to the drawer face (that extends side to side) shall be used to divide the drawer into 4 compartments. When drawers have 6 or 8 compartments, the compartments shall be on each side of the partition that is parallel to the drawer face. Partitions shall be free of burrs, sharp corners and rough or sharp edges.

3.3.7.5 Drawer suspension. Either four fixed type rollers (two secured to the front of the case and two secured to the rear part of the drawer) or four floating type rollers (operating in the case slide) and two fixed rollers at the rear of the drawer shall be used to support each drawer. Rollers shall be as specified in 3.2.2.2. The suspension shall be the roller type, shall operate smoothly and efficiently, and shall be designed to provide satisfactory service through the normal life expectancy of the cabinet. The drawer supporting members or rails shall be formed from the top of 16 gage (0.0598 inch) drawer sides or shall be a channel, formed from not less than 16 gage (0.0598 inch) steel and securely welded to the drawer side. The drawer supporting members of the suspension shall not contact the case channel during operation of the drawers. The case suspension channels shall be formed from not less than 16 gage (0.0598 inch) steel and shall be securely attached to the vertical members of the case frame. Dimensional clearance between suspension channels and drawer rails shall be kept to a minimum to reduce horizontal and vertical play as much as possible without inducing a drag or binding condition. The suspension shall allow drawer extension to at least three-fourths of its inside depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.7.6 Drawer stops. Each drawer shall encounter stops on both its inward and outward movement. The two out stops shall prevent the unintentional removal of the drawer from the case but they shall not prevent its removal (without the use of tools), when desired. When the drawers are extended and engage both out stops, either side of the face of the drawer shall be within 3/16 inch of being parallel with the face of the drawer case. The drawer shall contact bumpers of rubber, or other durable, energy absorbing material on the inward movement. All parts directly engaged in stopping action, except the bumpers, shall be steel. Stops shall be located on suspension members except the back of the cabinet may serve as stops on the drawer's inward movement, provided the areas at which the stopping action occurs are backed up by the back vertical members. Protrusions that are an integral part of the suspension members and which engage in stopping action shall consist of not less than three bends. Alternatively, this formation may be one or two bends provided it is backed up with an angle of not less than 14 gage (0.0747 inch) steel. Steel pieces which are applied to the suspension members and which engage in the stopping action shall have not less than three bends and shall be of not less than 18 gage (0.0478 inch) steel or, alternatively, they may have one or two bends provided they are of not less than 14 gage (0.0747 inch) steel. The above minimum formations and gages of steel shall be exceeded if necessary to comply with the test specified in 4.5.1.1. Dells may be punched into the suspension members to serve as stops provided they are of a size and depth to pass the applicable provisions of the test specified in 4.5.1.1.

3.3.7.7 Unit 3, tops. The top section shall be flush with the sides and back of the drawer sections and the front edge shall project beyond the front of the drawer section. The top shall be formed from steel as specified in 3.2.1 of the minimum gages shown in Table I and to the dimensions shown in Table II. The top shall be reinforced by a minimum 16 gage channel or angle not less than 1-3/8 inch wide with leg or legs not less than 5/8 inch. The channel or angle shall extend from front to rear on size 1 tops and from side to side on sizes 2 and 3 tops and shall be positioned at the approximate center of the top. Alternatively, two front-to-rear channels of the size specified above may be furnished in lieu of the side-to-side reinforcement. When the top is so constructed, the pieces shall be the same distance from each side of the top and the center span between them shall be not more than 32 inches. All reinforcements shall be spotwelded to the top plate. All corners shall be neatly closed and the two front corners shall be brazed or fusion welded and ground smooth along the entire seam. The tops shall be accurately formed to interjoin with the drawer sections.

3.4 Pretreatment and finishing.

3.4.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces shall be treated for painting in accordance with any method of TT-C-490.

3.4.2 Priming. Unless type I or type II of TT-C-490 is used, all exterior and interior surfaces treated as specified in 3.4.1 shall be coated with primer as specified in 3.2.3.1.

3.4.3 Enameling. All primed surfaces shall be coated with enamel as specified in 3.2.3.2 and baked in accordance with the enamel supplier's recommendations. Total dry film thickness of enamel and primer shall be not less than 1.4 mils on outside surfaces of all unit fronts, sides, tops and backs and not less than 1.0 mil on other surfaces inside and outside the units. Primer may be omitted from any surfaces prepared for painting in accordance with type I or type II of TT-C-490 provided the dry enamel film thickness is at least 1.0 mil on the outside surface of all unit fronts, sides, tops and backs and at least 0.6 mil on other surfaces inside and outside the units. The finish shall level out to produce smooth, uniform surfaces without runs, wrinkles, grit, areas of thin film or no film and separation of color. Finish panels shall withstand the tests specified in 4.5.3.

3.5 Identification marking. Unless special marking is specified, each item shall be permanently and inconspicuously marked in a plain and legible manner with the specification number, Federal Stock Number, contract number month and year of manufacture and the manufacturer's name or trade mark, so that the source of supply can be readily determined. When specified (see 6.2) identification markings shall be in accordance with MIL-STD-130.

3.6 Workmanship. The craftmanship exercised while performing the various operations of manufacture shall be of a degree as to eliminate the possibility of personal injury due to burrs and sharp edges, to assure that the occurrence of defects will not exceed the acceptable quality level specified herein, and to produce a finished commodity that is satisfactory in function, serviceability and appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.2 Preproduction sample inspection. Examination and testing of the preproduction sample (when required) shall be made on a completely fabricated item for all provisions of this specification applicable to end product examination and tests before regular production is started.

4.3 Sampling for inspection and acceptance. Sampling for lot inspection and acceptance shall be performed in accordance with MIL-STD-105, except where otherwise specified herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards, or if none, in accordance with this specification.

4.3.2 Inspection of end item. The lot shall be all sections of the same kind and size offered for inspection at one time. The sample unit shall be one completely fabricated section or one sectional assembly as applicable.

4.3.2.1 Visual examination, individual sections. The individual section shall be examined for defects specified in Table III. The acceptable quality level shall be as specified in 4.4.

TABLE II Classification of individual section defects

Examine	Defect	Classification Major	Classification Minor
Enamel finish	Poor adhesion, i.e. blistered, checked, peeling, tacky (not dry to touch), color separation, stain, not smooth and uniform, runs, sags, foreign matter in coating, area of thin coating or abrasion.		X
	Wrong color		X
	Thickness not as specified		X
	Scratch through to base metal, bare spots, rust under coating	X	
Metallic coating	Wrong type		X
	Poor adhesion, i.e., blistered, peeling, flaky, stained or discolored		X
Workmanship and construction (general)	Any part missing except bolts, nuts and lockwashers. Malformed or misplaced parts affecting serviceability. Broken, punctured or cracked parts. Sharp edge or projection that may cause injury.	X	
	Malformed, misplaced, damaged, buckled or warped parts affecting appearance. Any dent on exposed surfaces affecting appearance.		X
	Component not of material specified	X	
	Sheet metal not of thickness specified		X
	Sheet metal formations not as specified	X	
Bolts, nuts, lockwashers	Not corrosion resistant, threads stripped on more than one bolt, more than one bolt, nut or lockwasher missing.	X	
	Threads stripped one bolt; one bolt, nut or lockwasher missing		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of individual section defects (con.)

Examine	Defect	Classification Major	Classification Minor
Welds	Missing, not required number or not sound (broken, cracked, burnt through, poor adhesion, inc.)	X	
	Not ground smooth, protrude, or pits not filled (exposed welds)		X
	Spot welds not properly spaced		X
Face hardware	Not securely attached (drawer pulls or label holders move when slight vertical or horizontal pressure is applied)		X
	Not secured to drawer front as specified		X
	Label holder does not accommodate card at least 6 inches wide by 1-1/4 inches high by 0.05 inch thick.		X
	Wrong style or type		X
	One key will operate more than one lock in groups of less than 200 drawer sections.	X	
	Lock face extends beyond outer front surface of section less than 1/16 inch but more than 1/8 inch when in locked position.		X
Base	Wrong type or design	X	
Drawer case and drawer	Case frame members either do not overlap at least 2-1/4 inches in each direction or are not reinforced with gussets	X	
	Drawer fronts extend beyond vertical edges of cabinet front, or inset the vertical edges more than 1/8 inch. Formed widths of the four drawer front edges vary more than 1/32 inch		X
	Bottom of drawers not embossed as specified if constructed of 22 gage steel.	X	
	Drawer bottoms not punched for partitions when partitions are specified	X	
Drawer covers	Sides not stitched as specified. Stitching lines not true or even		X
Drawer compressors	Not type specified	X	
	Fail to lay flat at all compressing positions		X
Drawer partitions	Not easily secured and not easily removed		X
Drawer suspension and stops	Suspension (if of type applicable) not properly secured to drawer side.	X	
	Not roller type.	X	
	Drawer supporting members of suspension touches case channel during drawer operation.	X	
	Stop lets drawer bypass on inward or outward movement.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of individual section defects (con.)

Examine	Defect	Classification Major	Minor
Drawer suspension and stops (con't)	Drawer fronts touch when two or more adjacent drawers are open at the same time.		X
	Drawer does not contact bumpers on the inward movement		X
Top	Reinforcement not as specified	X	
Identification marking	Missing, incorrect, illegible		X

4.3.2.2 Visual examination, sectional assembly. The sectional group for the examination shall consist of one base section, three drawer sections and one top section. The sample unit shall be one sectional group. The assemblies shall be examined for defects specified in Table IV. The acceptable quality level shall be as specified in 4.4.

TABLE IV Visual defects of assembly and assembled section

Examine	Defect
Assembly and assembled sections	Requires tools for assembly
	Not easily assembled, i.e., requires force.
	Assembly twisted or buckled
	Sides, backs and fronts (except front of top, of assembled units not approximately flush. (1/16 inch tolerance acceptable.)
	Units improperly nested

4.3.2.3 Dimensional examination. Inspection will be made of sections for compliance with all dimensions specified. Any dimension not within tolerance specified will be classified as a defect. The acceptable quality level shall be as specified in 4.4.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packing, packaging and marking as required by section 5 of this specification are satisfied. Defects shall be scored as specified in Table V. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The acceptable quality level shall be as specified in 4.4.

TABLE V Preparation for delivery defects

Markings	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Component missing, damaged or otherwise defective affecting serviceability
Workmanship	Inadequate application of components such as incomplete closure of boxes; sealing and cushioning inadequate; strapping improperly located or missing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.4 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination in	Inspection levels	AQL's	
		Major	Total
Table III	II	4.0	10.0
Table IV	S-2	--	4.0
4.3.2.3	S-2	--	4.0
Table V	S-2	--	4.0

4.5 Tests.

4.5.1 Testing of end item. The tests described in 4.5.1.1 and 4.5.1.2 shall be conducted on all drawers of each section tested. Inspection level S-1 shall be used in selecting the number of sections to be tested from any lot. Failure of any drawer stop to withstand the test in 4.5.1.1 shall be cause for rejection of the lot represented by the sample section under test. An AQL of 4.0 expressed in terms of defects per hundred units shall be applicable to the test in 4.5.1.2.

4.5.1.1 Drawer stop test. All drawers in the section(s) to be tested shall be loaded as specified in 4.5.1.2. The drawers shall be extended about 2-1/2 inches. Moderate force which will propel the drawers along the drawers supporting member and against the out-stops shall then be applied. The in-stops shall be tested in the same manner, the drawer being fully extended when the moderate manual force is applied. The above described impacts shall be applied against both the in-stops and the out-stops not less than ten consecutive times in reasonably fast succession. At the completion of the test, all steel parts engaged in the stop action of both the in-stops and the out-stops shall have no permanent distortion. Where dells or the suspension members are used as stops, the dells shall not bypass the rollers when the above test is performed.

4.5.1.2 Drawer interference test. The loads specified below shall be equally distributed in each drawer of the cabinet.

Size 1 ---------- 35 pounds

Size 2 ---------- 45 pounds

Size 3 ---------- 50 pounds

The test shall be conducted by opening one drawer to approximately 1/4 of its full extension. The adjacent drawer shall then be opened the same distance plus approximately 1 inch. This operation shall then be continued with the drawer approximately 1/2 of full extension, then 3/4 of full extension and finally fully extended, (drawer fronts shall be parallel with each other at full extension). The drawer fronts shall not touch each other at any point of extension up to and including full extension.

4.5.2 Bend test for steel sheets. The steel sheets used for parts to be formed shall withstand a 180 degree bend, (at room temperature), around a radius not exceeding the thickness of the metal being tested, with and across the grain without showing any cracks or fractures on the outside of the bend.

4.5.3 Finish tests. The finish tests shall be performed on 20 gage sample panels prepared in accordance with 3.2.

4.5.3.1 Flexibility. The dried film shall show no evidence of cracking or flaking under seven power magnification after a panel has been bent through 180 degrees over a 1/8 inch diameter rod.

4.5.3.2 Hardness. The dried film shall withstand the firm stroke of a 2H pencil held at a 45 degree angle and pushed across the film surface without evidence of marring when viewed at an oblique angle in a strong light.

4.5.3.3 Adhesion. The dried film shall not be removed from the panel when the latter has been scored with a razor blade through the film to the base metal in such a manner as to produce a grid of 1/8 inch squares and a one inch wide piece of cellophane tape, (Scotch Brand No. 600), or equal, is applied firmly to the grid surface and then quickly pulled from the surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.5.4 Spot welds. Spot welds shall meet the peel test of MIL-W-12332 and bottom diameter shall be as specified therein.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Drawer sections. The dust covers or compressors shall be immobilized in the closed position by any means that will prevent damage during shipment and storage. The edges of each drawer front shall be protected by a minimum of two pieces of cushioning material conforming to PPP-C-843, type I, class A, a minimum of .120 thick. See Figure 5 for location of cushioning. The drawer sections shall be further protected by a full length cover or shroud fabricated from plastic film conforming to L-P-378, type I, grade A, finish 1. The film shall be a minimum of .002 inches thick.

5.1.2 Level B.

5.1.2.1 Drawer sections. The drawer sections shall be packaged as specified in 5.1.1.1.

5.1.3 Level C.

5.1.3.1 Drawer sections. The drawer sections shall be packaged in accordance with the manufacturers standard practice providing that this will insure protection for the units during shipment and provides for safe delivery to their destination.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Top sections The top sections shall be individually packed as illustrated in Figure 4. The fiberboard box shall conform to PPP-B-636, class-weather resistant, grade V3c or V3s. The corrugated U-pads shall be constructed from material conforming to PPP-F-320, class weather-resistant, grade V3c or V3s The wood members shall conform to MIL-STD-731, class 2, group I, II, or III wood. Close, seal, and strap the individual boxes in accordance with the appendix to the box specification.

5.2.1.2 Drawer sections. The drawer sections packaged as specified in 5.1 shall be individually packed as illustrated in Figures 5 and 6.

5.2.1.2.1 Base. The base shall be constructed as shown in Figure 8 from a single sheet of fiberboard conforming to PPP-F-320, class weather resistant, variety DW, grade V11c. The length and width of the fiberboard sheet shall be equal to the comparable dimensions on the drawer section after the corner pads are assembled. The runners shall be nominal 1 x 4 inch lumber and the skids shall be nominal 2 x 2 inch lumber. The lumber shall conform to MIL-STD-731, class 2, group I, II or III wood The assembly shall be held together with staples conforming to FF-N-105, type III, style 3, of sufficient size to insure that the base will remain intact during shipment.

5.2.1.2.2 Corner pads. Each unit shall be provided with four corner pads as shown in Figure 5. The pads shall be constructed from two thicknesses of fiberboard conforming to PPP-F-320, class weather-resistant, variety DW, grade V15c. The minimum length of the legs of the angle shall be three inches and the length shall be equal to the comparable dimension on the drawer section.

5.2.1.2.3 Top pad. The top pad shall be constructed as shown in Figure 7 from a single sheet of fiberboard conforming to PPP-F-320, class weather-resistant, variety DW, grade V11c. The length and width of the fiberboard sheet shall be equal to the comparable dimensions on the drawer section after the corner pads are assembled. The spacer blocks shall be located approximately as shown and may be constructed from laminated layers of the fiberboard specified herein or from honeycomb material conforming to MIL-H-9884. The width of the center spacer block shall be such as to provide protection for the drawers from one handle to the other less a total of 4 inches (2 at each end) and shall be located approximately on center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

5.2.1.2.4 Box. The drawer section, prepared for shipment as specified herein shall be fitted with a close-fitting box, conforming to PPP-B-636, class weather-resistant, variety DW, grade V11c, style RSC (modified as shown in Figure 5). Close and seal the box in accordance with the appendix to PPP-B-636. The box shall be further secured to the base with 4 staples on each side as shown in Figure 6. The staples shall conform to FF-N-105, type III, style 3, crown width 1-inch, 16 gage, with a minimum leg length of 7/8 inch.

5.2.1.2.5 Strapping. The closed packs shall be strapped as shown in Figure 6 utilizing 3/4 x .020 inch steel strapping conforming to QQ-S-781, type I, class B, grade 2. At the option of the manufacturer, strapping conforming to PPP-S-760, may be used, providing that it meets the minimum requirements of the metal strapping specified herein.

5.2.1.3 Base sections. The base sections shall be individually packed as illustrated in Figure 4. The fiberboard boxes shall conform to PPP-B-636, class weather resistant, grade V3c, or V3s. The wood members shall conform to MIL-STD-731, class 2, group I, II or III wood. Close, seal, and strap the boxes in accordance with the appendix to the box specification.

5.2.2 Level B.

5.2.2.1 Top sections. The top sections shall be individually packed as specified in 5.2.1.1 except that the fiberboard boxes shall conform to PPP-B-636, class domestic, grade 200, the U-pads shall be constructed from material conforming to PPP-F-320, class domestic, grade 200, and the box shall not require sealing.

5.2.2.2 Drawer sections. The drawer sections packaged as specified in 5.1 shall be individually packed as illustrated in Figures 5 and 6.

5.2.2.2.1 Base. The base shall be as specified in 5.2.1.2.1 except that the fiberboard shall conform to PPP-F-320, class domestic, variety DW, grade 600.

5.2.2.2.2 Corner pads. The corner pads shall be as specified in 5.2.1.2.2, except that the fiberboard shall conform to PPP-F-320, class domestic, variety DW, grade 275.

5.2.2.2.3 Top pad. The top pad shall be as specified in 5.2.1.2.3 except that the fiberboard shall conform to PPP-F-320, class domestic, variety DW, grade 600.

5.2.2.2.4 Box. The box shall be as specified in 5.2.1.2.4 except that it shall conform to PPP-B-636, class domestic, variety DW, grade 600 and the sealing shall not be required.

5.2.2.2.5 Strapping. The closed packs shall be strapped as specified in 5.2.1.2.5.

5.2.2.3 Base sections. The base sections shall be individually packed as specified in 5.2.1.3 except that the fiberboard boxes shall conform to PPP-B-636, class domestic, grade 200 and the box shall not require sealing.

5.2.3 Level C.

5.2.3.1 Top sections. The top sections shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification rules or the National Motor Freight Classification rules.

5.2.3.2 Drawer sections. The drawer sections packaged as specified in 5.1 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification rules or the National Motor Freight Classification rules.

5.2.3.3 Base sections. The base sections shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification rules or the National Motor Freight Classification rules.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civilian agencies. In addition to any special markings required by the contract or order, and those specified in 5.3.3 all marking shall be in accordance with Fed. Std. No. 123.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

5.3.2 Military agencies. In addition to any special marking required by the contract or order and those specified in 5.3.3, all marking shall be in accordance with MIL-STD-129.

5.3.3 Special marking. In addition to the markings required by 5.3.1 or 5.3.2, the front, back and end panels of each drawer section shipping container shall be marked in each upper corner with the word "UP" and an arrow pointing to the top of the container. The words "UP" shall be printed in characters a minimum of 2 inches high. Additionally, the following shall be marked where indicated in characters a minimum of 2 inches high where indicated:

Top panel of box.	TOP THIS SIDE UP FRAGILE-HANDLE WITH CARE
Front and back panels of box:	FURNITURE FRAGILE-HANDLE WITH CARE

The front and back panels of the box shall also be marked with arrows and the words "FORK HERE" in two places on each panel See Figure 6 for approximate locations of all special markings.

6. NOTES

6.1 Intended use. The cabinet sections are intended for the routine horizontal filing and storing of drawings, maps, plans and similar records.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Number, title and date of this specification.
(b) Units and sizes required (1.2.1).
(c) If preproduction sample requirement is waived (3.1).
(d) If locks are required (3.2.2.1.3).
(e) If drawer compressors required in lieu of drawer covers (3.3.7.2 and 3.3 7.3).
(f) If drawer partitions required (3.3.7.4).
(g) If special or military identification marking required (3.5).
(h) Level of packaging and packing required (5.1 and 5.2).
(i) If civilian or military marking (of shipping containers) required (5.3).

6.3 Standard color panels. Sample panels of the standard color of finish are obtainable from the Regional Business Service Centers, Federal Supply Service, General Services Administration.

6.4 Drawers are not interchangeable between manufacturers; therefore, locks, partitions and fabric covers should be purchased as original equipment only.

6.5 Definition of welding terms and brazing.

6.5.1 Resistance welding. Resistance welding is a group of welding processes wherein coalescence is produced by the heat obtained from resistance of the work flow of the electric current in a circuit of which the work is a part, and by the application of pressure.

6.5.2 Spot welding. Spot welding is a resistance welding process wherein coalescence is produced by the heat obtained from resistance to the flow of electric current through the work parts held together under pressure by electrodes. The size and shape of the individually formed welds are limited primarily by the size and contour of the electrodes.

6.5.3 Fusion welding. Fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined, without any mechanical pressure The joining is usually accomplished through the fusion of metal deposits from an external source.

6.5.4 Brazing. Brazing is the joining of metals with the aid of a filler metal of a different composition having a melting point above 800 degrees Fahrenheit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

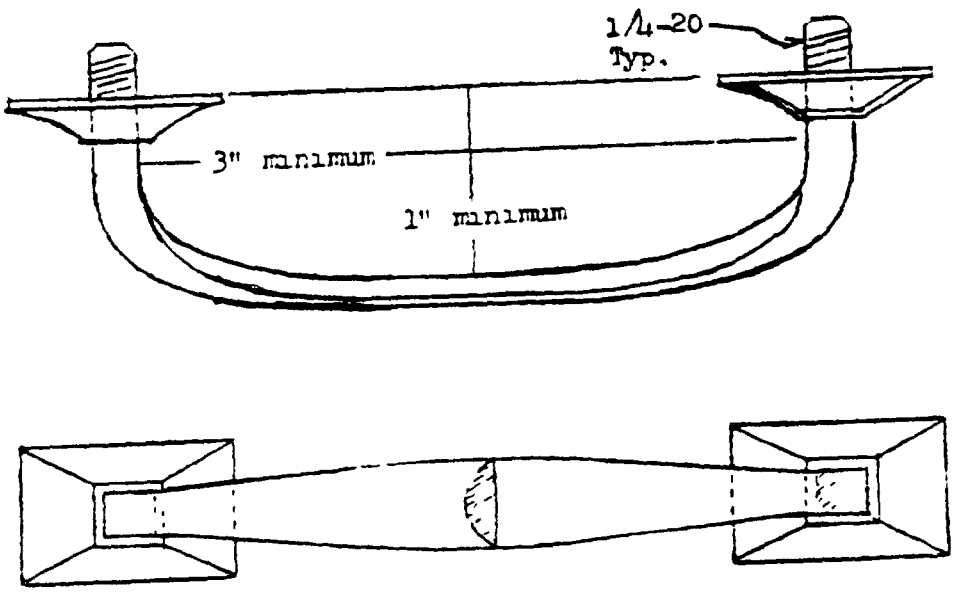
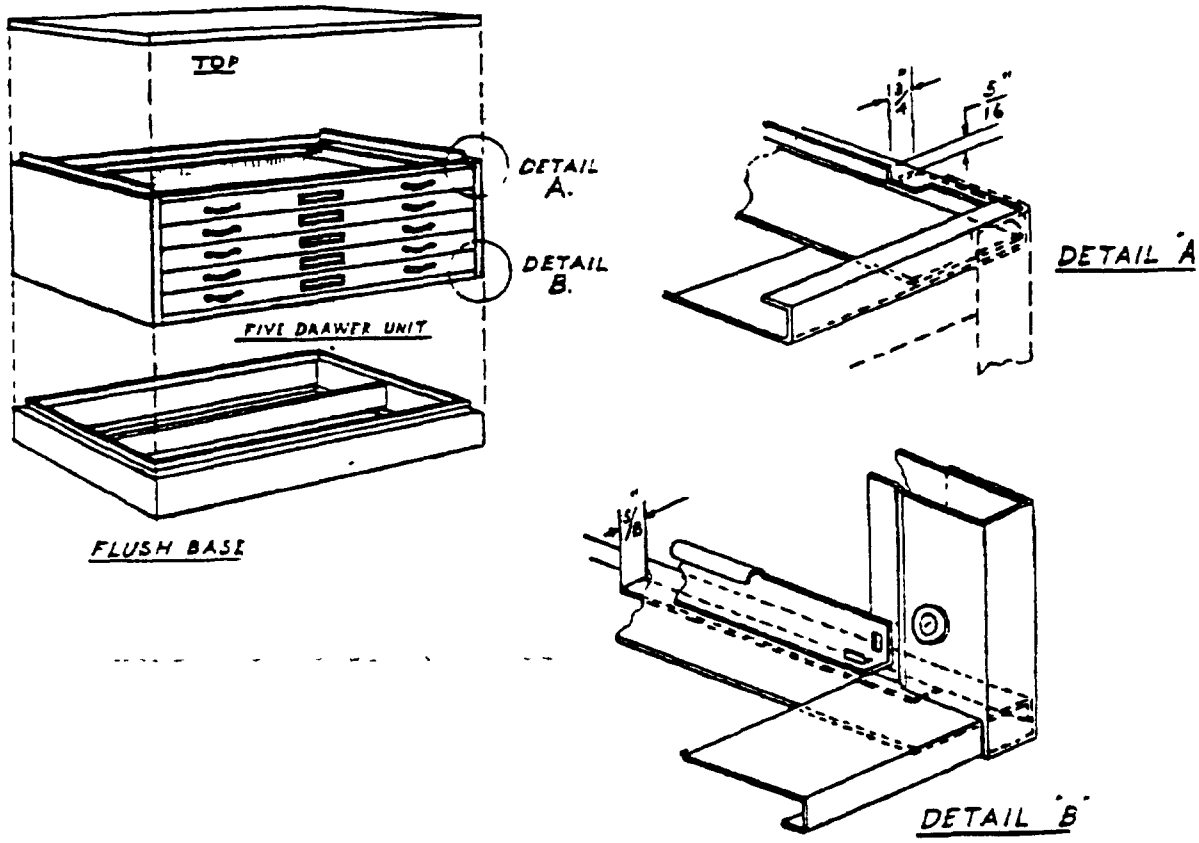


Figure 1. Drawer pull

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.




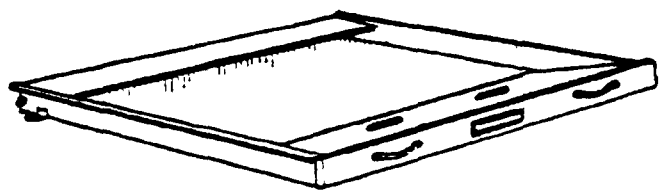


FIGURE 2 –Filing cabinets, steel, map and plan.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

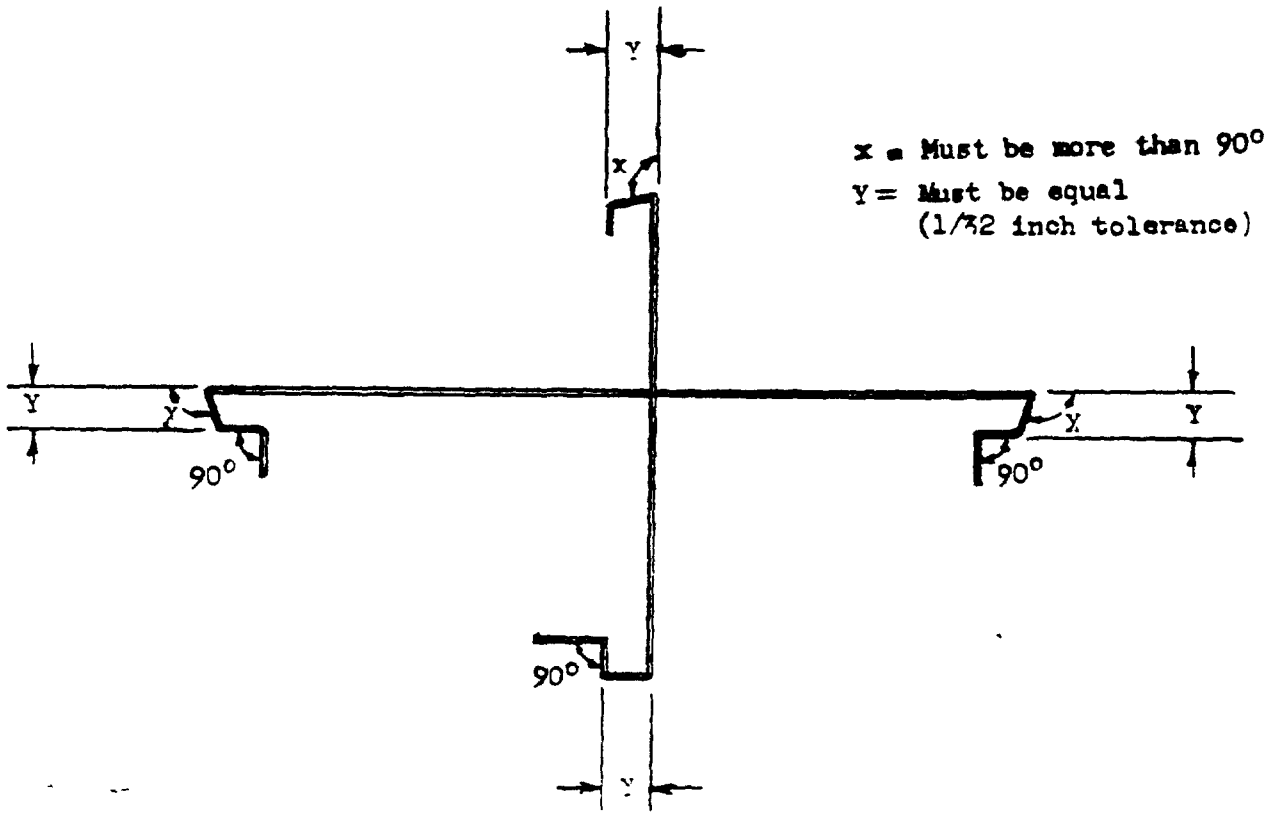

Typical Outside Drawer Front
(Horizontal and vertical sections)

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

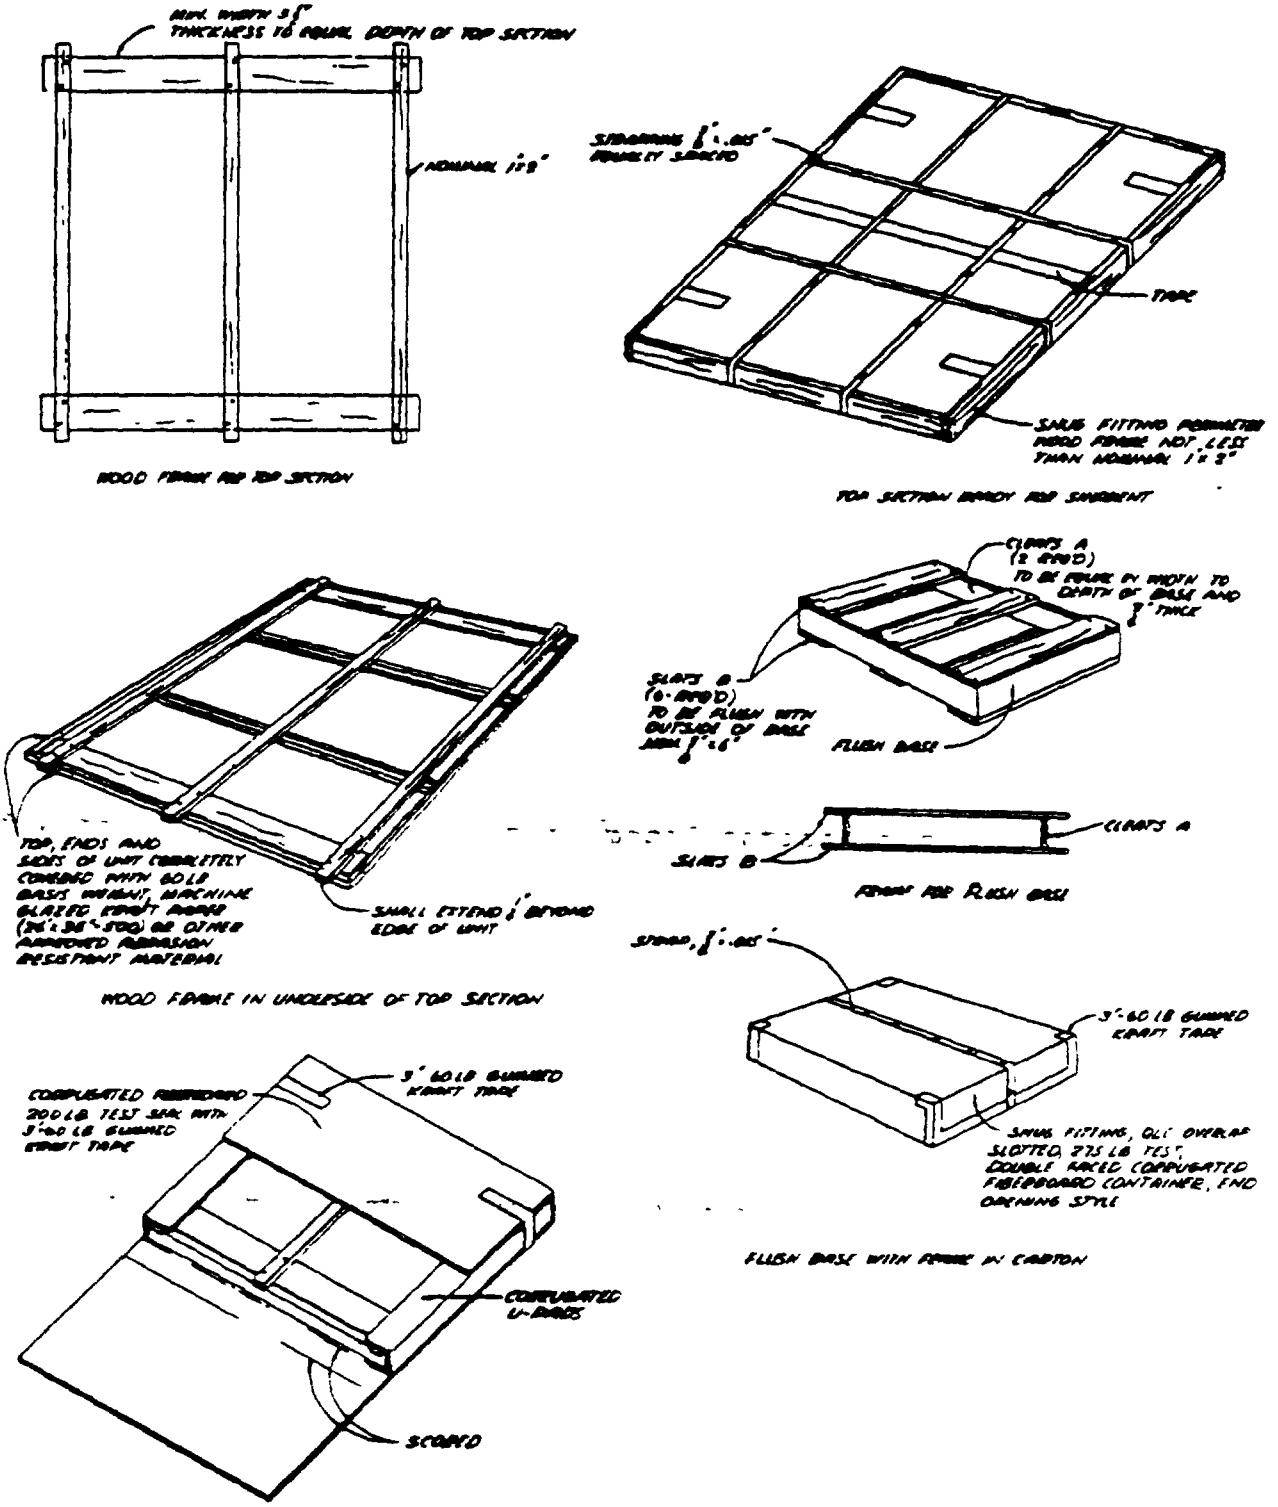


Figure 4 - Packaging and packing for domestic shipment, filing cabinet, steel, map and plan.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

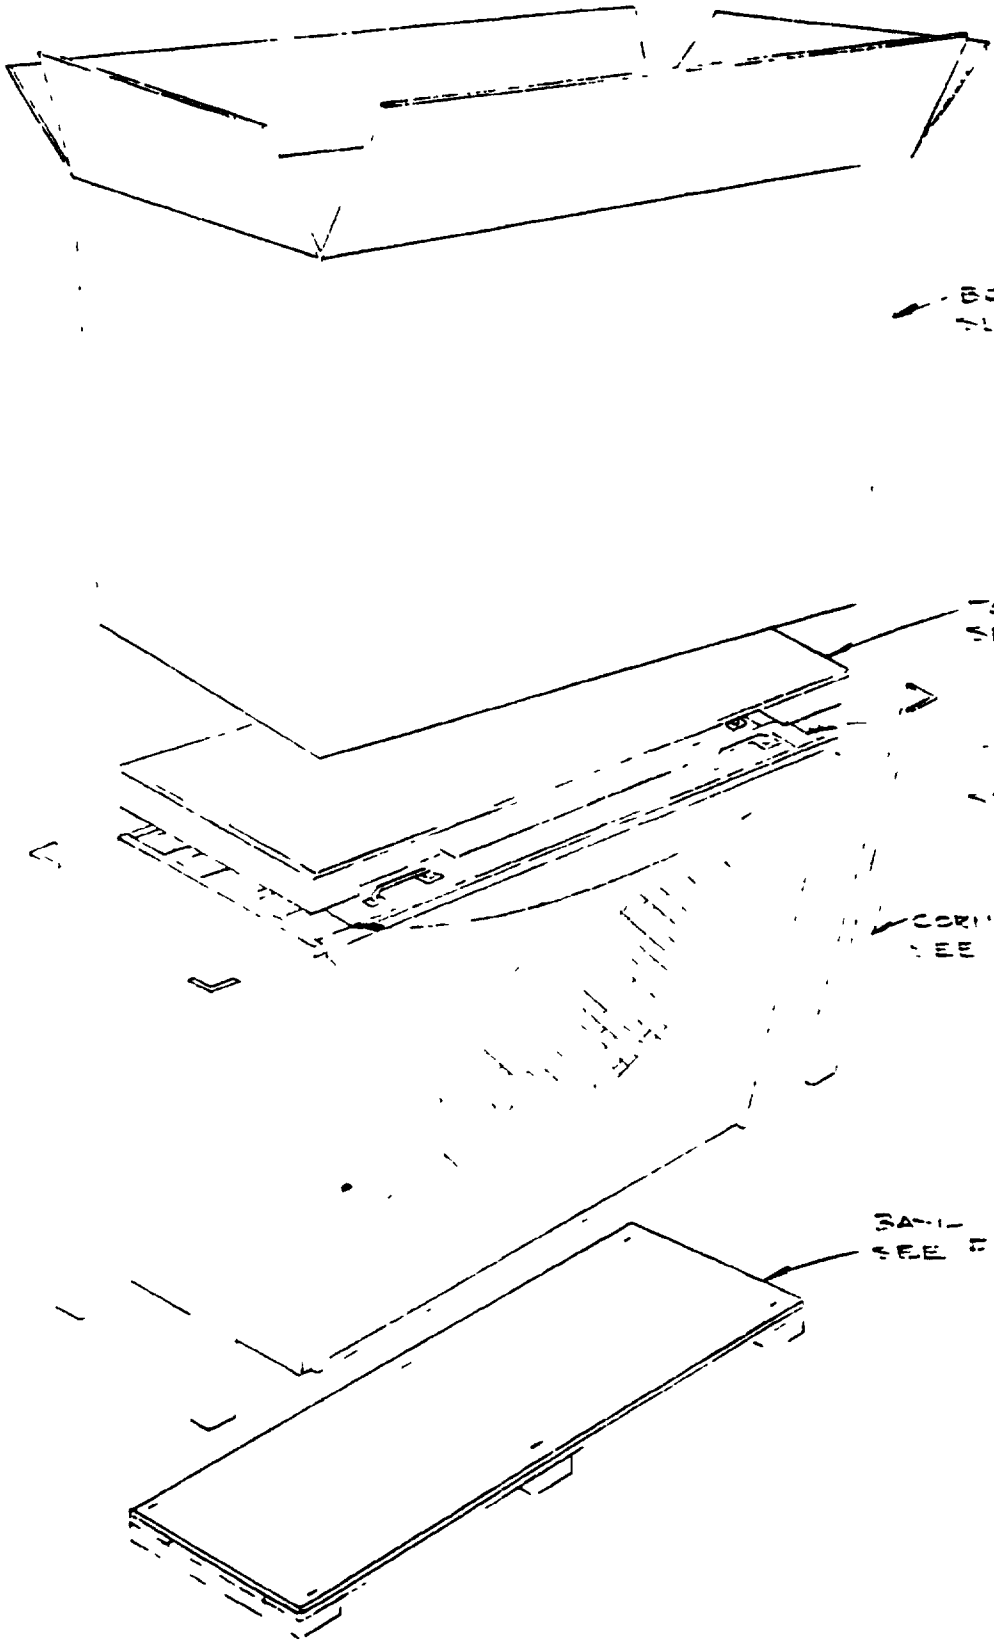


FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.


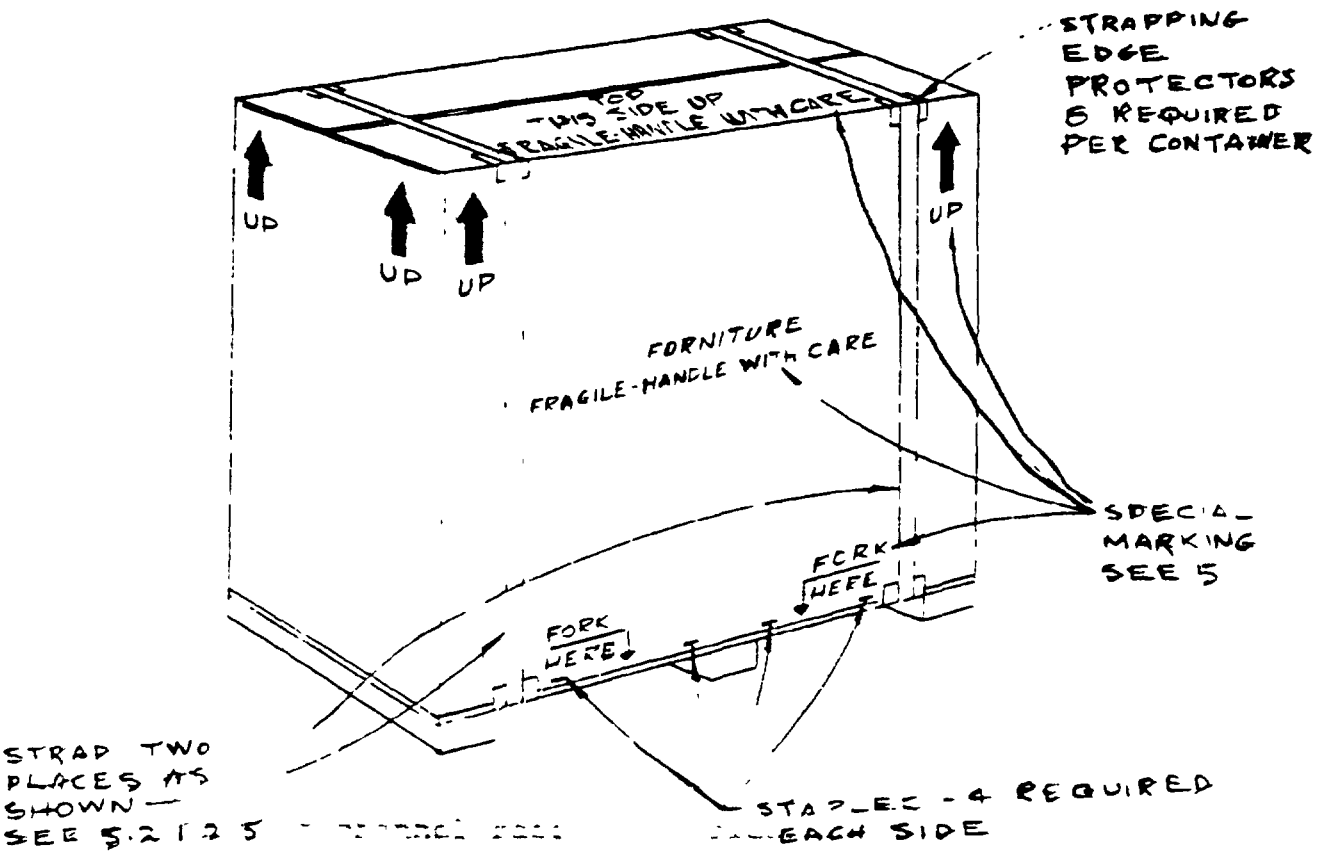


FIGURE 6

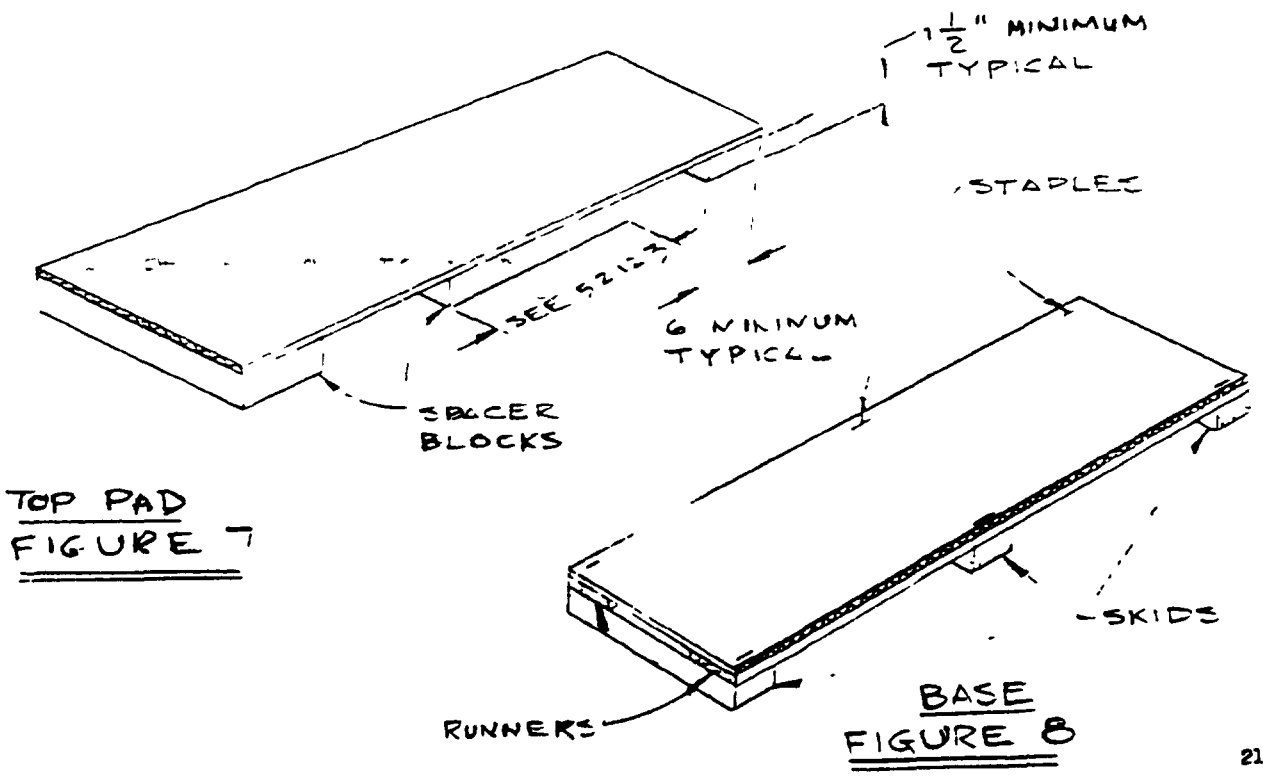

TOP PAD
FIGURE 7

BASE
FIGURE 8

21/22

GSA DF 72 7100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.